



Perfect Exit Device: A Lifetime of Value Virtually Anywhere

Marks USA X-it™ Exit Devices

- Ultra-Durable, heavy gauge extrusion, 32D Finish
- Marks Lifetime Mechanical Warranty
- Steel flush mounted Panic Protector™ End Cap
- Easy Installation & Retrofits All Popular Preps
- ANSI 156.3 (2001), Grade 1
- M9900 is 3 Hour Fire Rated Dead Latch Bolt; Stainless Steel 3/4" Throw



Marks X-it™ M9900 Panic Exit Devices offer a simple, heavy-duty, easily installed solution where high quality panic and fire listed hardware is needed. These extremely durable, Grade 1 exit devices are perfect for high impact applications such as schools, universities and other institutional or commercial buildings, and retrofit all popular preps. The heavy-duty cast chassis provides superior durability, while the smooth reduced projection touch-bar assembly minimizes catch hazards and mitered steel flush mounted Panic Protector™ End Caps, prevent abuse.

Marks X-it™ M8800 Narrow Stile Exit Device is designed for use on all types of narrow stile single and double doors, of either 36" or 48" door width, and conveniently, non-handed for installation flexibility.

Marks also stands behind its products with a Lifetime Mechanical Warranty, an industry first. In compliance with ANSI BHMA A156.3 Grade 1, ANSI/UL305 panic hardware and 2013 CA Building Code 11B-309.4, etc.



MARKSUSA





M9900 Exit Device



SPECIFICATIONS:

- **End Cover:** Stainless steel beveled "Panic Protector" design
- **Strike:** Roller strike
- **Rail Assembly:** Heavy Gauge Stainless Steel
- **Dead latch Bolt:** Stainless Steel 3/4" throw
- **Dead latch Bolt:** Stainless Steel 5/8"
- **Dogging feature:** Allen Key (M9900)
- **UL listed:** For "Panic Hardware" and Fire Rated Model 3 hour fire doors up to 38" x 86"
- **ANSI:** ANSI 156.3 (2001), requirements for Grade 1
- **3 Hour Fire Rating**
- **Finished:** Stainless steel satin finish

| MARKS # | FUNCTION |
|-------------|----------------------------|
| M9900 | Rim Panic |
| M9900F | Fire Rated Rim Panic |
| M9900 - 48 | Rim Panic - 48" |
| M9900F - 48 | Fire Rated Rim Panic - 48" |

| OPTIONS | |
|-----------|-------------------------|
| M9900 | 33" Length for 38" Door |
| M9900-48" | 42" Length for 48" Door |

M9900 Exterior Trim



ENTRY LEVER TRIM:

- Standard Marks "C" Keyway KNK cylinder for panic device.
- Cylinder locks or unlocks lever, rigid when locked; when unlocked retracts latch bolt
- Marks 26D Finish / Standard 1-3/4" Door Thickness
- IC Prep Code G1, Less Cylinder G3

ESCUTCHEON LEVER DESIGN:

- Thru bolt design
- Non Handed design. Easily field reversible
- Marks 32D Finish / Standard 1-3/4" Door Thickness
- Standard Marks "C" Keyway 1-1/4" Mortise cylinder with special cam
- IC Prep Code G1
- Less Cylinder G3

| MARKS # | DESCRIPTION |
|------------|--|
| M411 | Finger Pill - no cylinder |
| MLHL-650A | Lever / Rose Trim Entry |
| MLHL680F | Lever / Rose Trim Storeroom |
| MLHL-600N | Lever / Rose Trim Passage |
| MLHL-600DT | Lever / Rose Trim Dummy Trim |
| MESC600A | Lever / Escutcheon Trim Entry |
| MESC600F | Lever / Escutcheon Trim Storeroom |
| MESC600N | Lever / Escutcheon Trim Passage |
| MESC600DT | Lever / Escutcheon Trim Dummy Trim |
| M9901 | 36 inch Panic Device Dogging Kit |
| M9902 | 48 inch Panic Device Dogging Kit |
| MVR8 | Vertical Rod 8 ft extension - Code 8 |
| MVR10 | Vertical Rod 10 ft extension - Code 10 |
| MVRB | Vertical Rod - Bottom Rod |
| MVP/32D | Rim Panic Vandal Pull |
| MVPCC/32D | Rim Panic Vandal Pull w/ cylinder hole |



M8800 Narrow Stile Exit Device



SPECIFICATIONS:


- **Specification:** Conforms to ANSI BHMA A156.3 Grade 1 Exit Device Requirement Standard
ANSI/UL305 Standard for Safety for Panic Hardware
2013 California Building Code Sec. 11B-309.4
- **For Doors:** *(Please specify when ordering non standard size doors)*
Thickness: Standard 1 3/4", may fit with door thickness up to 2"
Width: Standard 36" or 48", may fit door width 30"-48"
- **Mounting:** Furnished Standard with Wood and Machine Screws
- **Head Cover:** Zinc Alloy
- **Chassis:** Aluminum
- **Rail Assembly:** Heavy Gauge extruded aluminum with stainless steel on top of touch bar
- **End Cap:** Zinc Alloy
- **Hand:** Non-handed
- **Latch Bolt:** Stainless Steel, 3/4" (18mm) throw
- **Strike:** Roller Strike (Stainless Steel)
- **Dogging:** Allen Key (equipped on panic rate devices only)
- **Finish:** 32D: Satin Stainless Steel Finish
10B: Oil Rubbed Bronze Finish
- **Dimension:** Touch bar height from finished floor: 41" (1041mm) from center of touch bar
Touch Bar Projection: Neutral: 3 5/16" (84mm)
Depressed: 2 19/32" (66mm)
Head Cover: LxWxH: 206mm x 76mm x 71mm
Device Length: 34 5/8" (88cm) for 36" door width 46 5/8" (118.5 cm) for 48" door width

| MARKS # | FUNCTION |
|------------|-----------------|
| M8800 | Rim Panic |
| M8800 - 48 | Rim Panic - 48" |





M9900 VR Exit Device

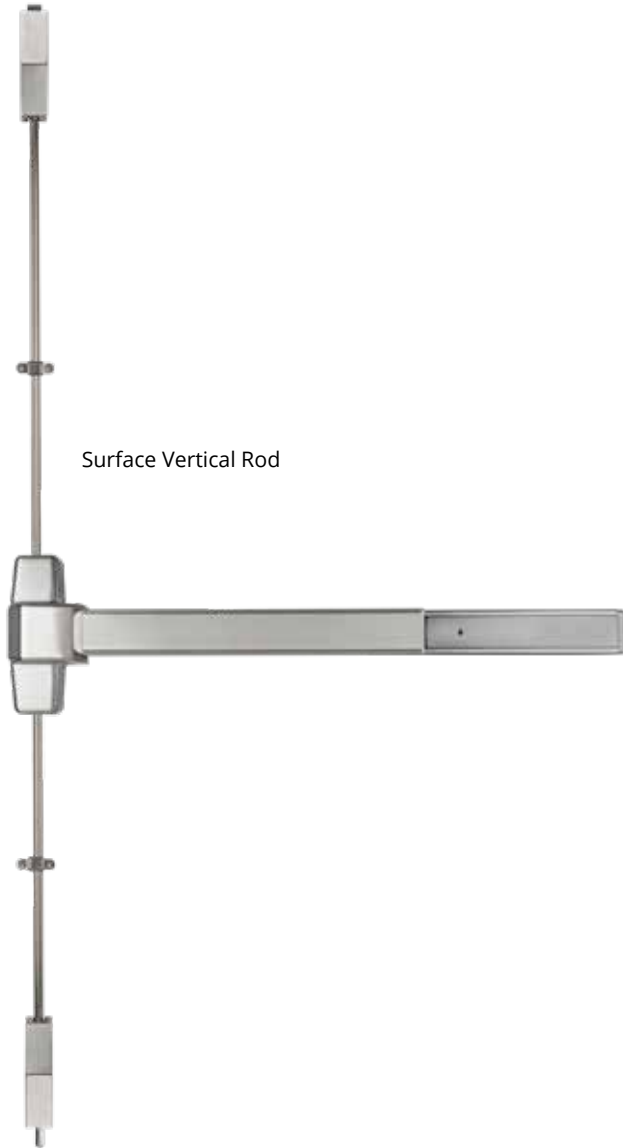

SPECIFICATIONS:

- **Device Head Cover:** Zinc alloy or stainless steel
- **Chassis:** Steel, plated
- **Mechanism Housing:** Extruded aluminum
- **Push Bar Base:** Extruded aluminum
- **Touch Plate:** Stainless Steel
- **End Cap:** Stainless Steel
- **Top Latch:** Stainless Steel 37/64" (14.8mm)
- **Top Strike:** Included
- **Bottom Latch:** Stainless Steel 37/64" (14.8mm)
- **Bottom Strike:** Included
- **Latch Case Covers:** Steel, stainless steel or brass
- **Vertical Rods:** Aluminum tube
- **Hand:** Non-handed
- **Mounting:** Machine screws standard. Sex bolts optional. Order "SNB" for wood or unreinforced metal doors
- **Dogging:** Allen-type key furnished
- **Finish:** 32D
- **Outside Trim:** Order separately
- **Standard Height:** 7' doors
- **UL listed:** ANSI/BHMA Grade 1 Panic Exit Hardware
- **3-Hour Fire Rated**

APPLICATION:

- For use on single door or pair of doors
- 1 3/4" (44 mm) door thickness standard. Specify thickness other than 1 3/4"
- RHR or LHR hollow metal, wood and mineral core doors
- Minimum Stile Width: 3 1/2" (89 mm)

Distributed by:



MARKSUSA

