

BOGEN
SIGNATURE



HIGH-PERFORMANCE LOUDSPEAKERS

BOGEN



BOGEN®

SIGNATURE

Bogen Signature S4T & S5T Loudspeakers are compact, versatile, and feature unique driver technologies which produce impeccable sound quality. With their compact form factor, these speakers are an excellent fit for most indoor environments or protected outdoor locations. By using the latest Ferrofluid formulations and robust, oversized, voice coils, the Bogen Signature speakers provide exceptionally high thermal endurance for unmatched long-term power handling and durability. The proprietary MDT metal-alloy cone structure and spiderless MLS driver technology combine to create not only a sonically exceptional loudspeaker, but one which is highly resistant to moisture, humidity, heat, cold, salt, chlorine, and many other common environmental assaults.

Designed to both sound and look great, these speakers employ unique MDT and MLS technologies; thick-walled, low-resonance ABS enclosures; scratch-resistant, powder-coated aluminum grilles; and compact, powder-coated cast aluminum swivel mounts.



Unique MDT (Metal Diaphragm Technology):

- Metal-alloy cones provide superior musical detail
- High rigidity and low mass of metal versus traditional papers and plastics (extremely stable cone structure)
- Fast transmission of sound through the diaphragm means lower energy storage, and a special anodizing process creates a ceramic coating for increased stiffness
- Efficient heat-sinking of voice coils for long-term, high-power situations

MLS (Magnetic Liquid Suspension):

- Eliminates distortion caused by traditional fabric centering “spiders”
- Voice coil is more efficiently heat-sunked by fluid instead of air and constantly centered for low distortion
- Greater linearity is accomplished because the mechanical spider is eliminated
- Constant lubrication of gap prevents oxidation from humid environs

Bogen Signature Speakers provide exceptional musicality in a surprisingly compact enclosure.


SIGNATURE



Rear View (S4TW shown)




S4T

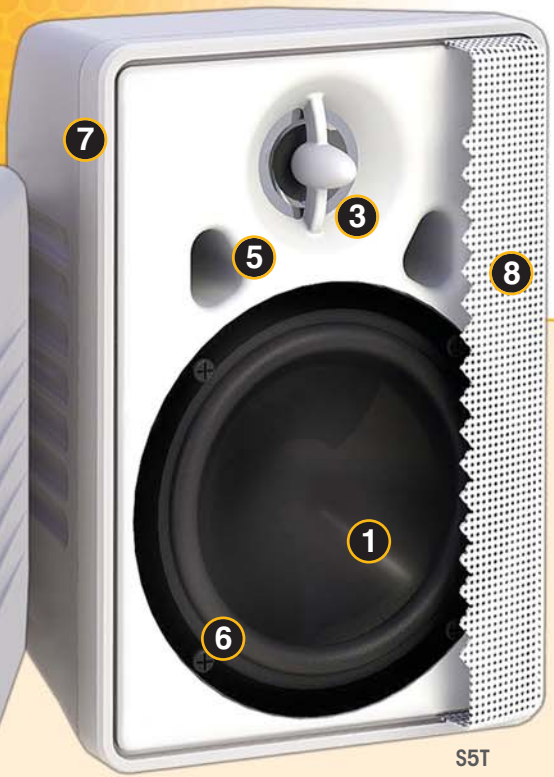

S5T


- | | | |
|---------------------------------|----------------------------------|-----------------------------------|
| 1. Anodized Metal-Alloy Cone | 5. Dual Arrayed Tuned Vents | 9. Compact Swivel Mount Assembly |
| 2. Titanium Tweeter | 6. Compound Rubber Cone Surround | 10. Power Level Selector |
| 3. Horn-Loaded Titanium Tweeter | 7. Low-Resonance ABS Enclosure | 11. Terminal Input Connection |
| 4. Tuned Vent | 8. Powder-Coated Aluminum Grille | 12. Safety Cable Attachment Point |

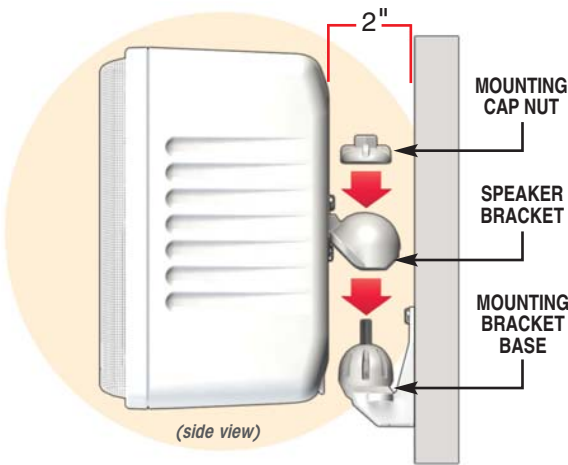

Distinctive, Compact Swivel Mount Bracket Assembly

The Bogen Signature hemispherical swivel mount provides close-to-the-wall mounting, in both a vertical and horizontal orientation, while at the same time offering a wide range of movement for accurate aiming of the speaker. Once positioned, the precise angle is locked into place with a simple capnut that can be tightened by hand or with a nut driver. Made of cast aluminum for strength and powder-coated for durability, the simplicity of this 3-piece mount allows for a quick, straightforward installation. Simply secure the mounting bracket base to the mounting surface, attach speaker bracket to the speaker, drop the speaker over the mounting bracket base's stud, aim the speaker, and then tighten down the cap nut.

Mounting Range of Movement for S5T and S4T Models

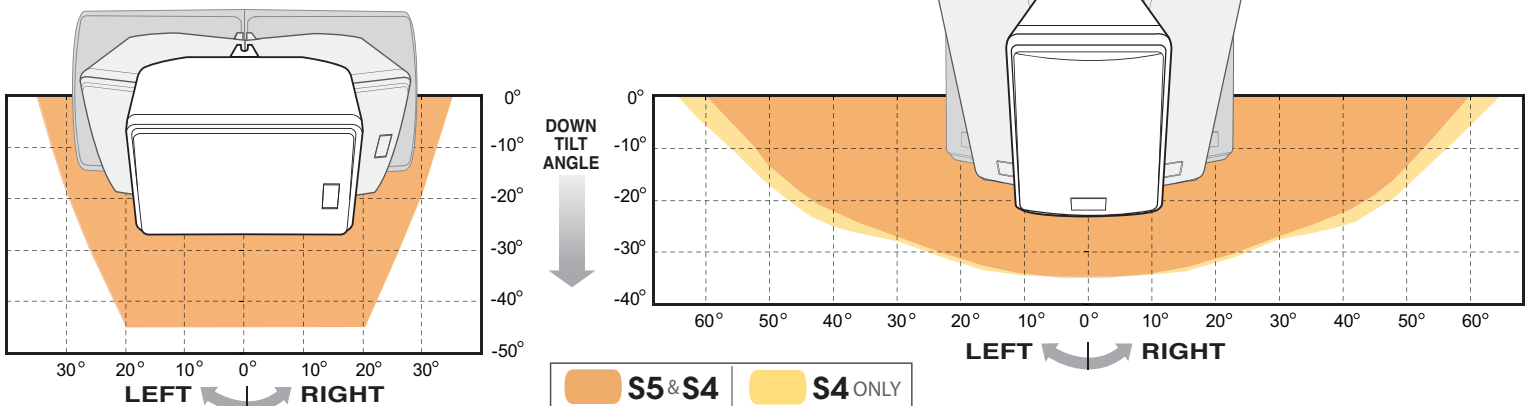

BOGEN Signature Technical Specifications and Responses

	S4T	S5T	S4T	S5T
Frequency Response (-10 dB)*:	58 Hz to 18 kHz	48 Hz to 17 kHz	Power Input (max.)	75W @ 8 ohms / 150W @ 8 ohms
Low Frequency Design – Metal-Composite Cone Utilizing MLS Voice Coil Guidance System:	4-1/2" Nominal Dia.	5-1/4" Nominal Dia.	Power Taps 70V:	16, 8, 4, 2, 1 watts / 32, 16, 8, 4, 2, 1 watts
High Frequency Driver – Titanium Cone:	1" Nominal Dia.	1" Horn-Loaded	Product Weight:	6 lbs. / 9 lbs.
Sensitivity (1W/1m, Avg. 100 Hz to 15 kHz):	86 dB SPL	89 dB SPL	Speaker Dimensions (WxHxD) <i>Without Bracket:</i>	5-1/4" x 8-1/4" x 5-3/8" / 6-7/8" x 9-3/4" x 6-1/8"
Dispersion <i>Horizontal:</i>	150 Degrees	130 Degrees	<i>With Bracket:</i>	5-1/4" x 8-1/4" x 7-3/8" / 6-7/8" x 9-3/4" x 8-1/8"
<i>Vertical:</i>	120 Degrees	110 Degrees	Enclosure Material:	Thick walled, low-resonance, molded ABS
Impedance Ratings	70V and 8Ω	70V and 8Ω	Product Color:	White ("W" suffix) and Black ("B" suffix)
			Mounting Bracket Material:	Aluminum Alloy, Powder-Coated Finish
			Grille Material:	Perforated Aluminum, Powder-Coated Finish
			Terminations:	Pressure Clamp
			Included Accessories:	Color-Matched Mounting Bracket

* Half-Space Response

