



AVN-W06-2P04W65G

NDAA COMPLIANT | CE | FC


WEATHER PROOF OUTDOOR 4 PORT POE SWITCH

OVERVIEW

- IEEE802.3, IEEE 802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3af, IEEE802.3at
- 4 x 10/100 Base-TX PoE Ports + 2 SFP (1G)
- 100-240VAC Input
- High back-plane bandwidth 4.8Gbps

DIMENSIONS

Unit : inch(mm)

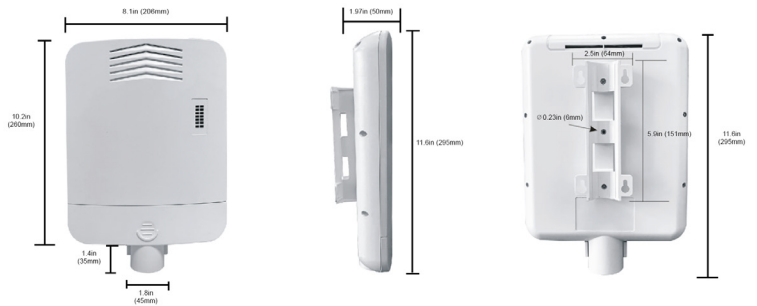

OPTIONAL ACCESSORIES



AVM-ANCPM-U1
MOUNTING BRACKET

SPECIFICATIONS

ATTRIBUTE	
Networking Interfaces	4 x 10/100 Mbps RJ45 Ethernet Ports 2 x 1Gbps SFP Slots
LED Indicators	Power, Link/Act, PoE
PERFORMANCE	
Switching Capacity	4.8 Gbps
Forwarding Capacity	4.17 Mpps
Forwarding Mode	Store and Forward
Packet Buffer Memory	2 Mbit
MAC Address Table	2K
PoE Budget	60W
PHYSICAL	
Dimension	295mm x 206mm x 50 mm
Weight	3.7lbs (1.7kg)
Operating Temperature	-20 to 60°C
Storage Temperature	-20 to 70°C
Operating Humidity	5 to 95% Noncondensing
Power Method	100-240VAC 50/60Hz
Max. Power Consumption	Including PoE Output: 65W Excluding PoE Output: 5W
EMC Safety	FCC, CE, RoHS
POWER OVER ETHERNET	
PoE Interfaces	Ports 1-4
PoE Standard	IEEE802.3af, IEEE802.3at
Max. PoE Wattage per Port	30W
PoE Voltage	48VDC
PoE Pin Assignment	V- (RJ45 Pin1,2), V+ (RJ45 Pin 3,6)
PACKAGE LIST	
PoE Switch	1each
User Manual	1each
Power Adapter	1each