

SPEC ANY TECH. *Configure your fit.*

Bollards

PRO Bollards[™] are sleek, solid, architectural pedestals that integrate smaller tech combinations for flush and surface mount devices into a single stand. Great for lobbies and entryways. With a superior anchor solution they will withstand all the traffic and abuse your visitors can inflict. An excellent choice for security consultants and integrators around the world.

PRODUCT FEATURES

- Specify any access control device(s)
- Attractive, modern architectural design
- Available in aluminum, carbon steel, or stainless steel
- Standard 2"-6" depth, up to 3"-8" widths available
- Removable "small, hand access" back panel
- Internal .25" base plate, "no wobble" superior anchoring
- No visible fasteners after installation
- Easily customizable
- Free custom CAD designs in 24 hours
- Fast installation process
- Made in the USA


Areas of Use

- Multi-Tenant Units
- Premier Office & Lobby
- Gate Ingress/Egress

QUICK FEATURE COMPARISON

	Made from	Removable back panel	Тор	Widths	Customization
BOLLARDS	Metal tubes	Small hand access	Flat or tapered	Limited 8" or less	Limited, dependent on tube mill dimensions
CABINETS	Sheet metal	Full access	Flat	Unlimited 8"+	Unlimited & profile dimensions



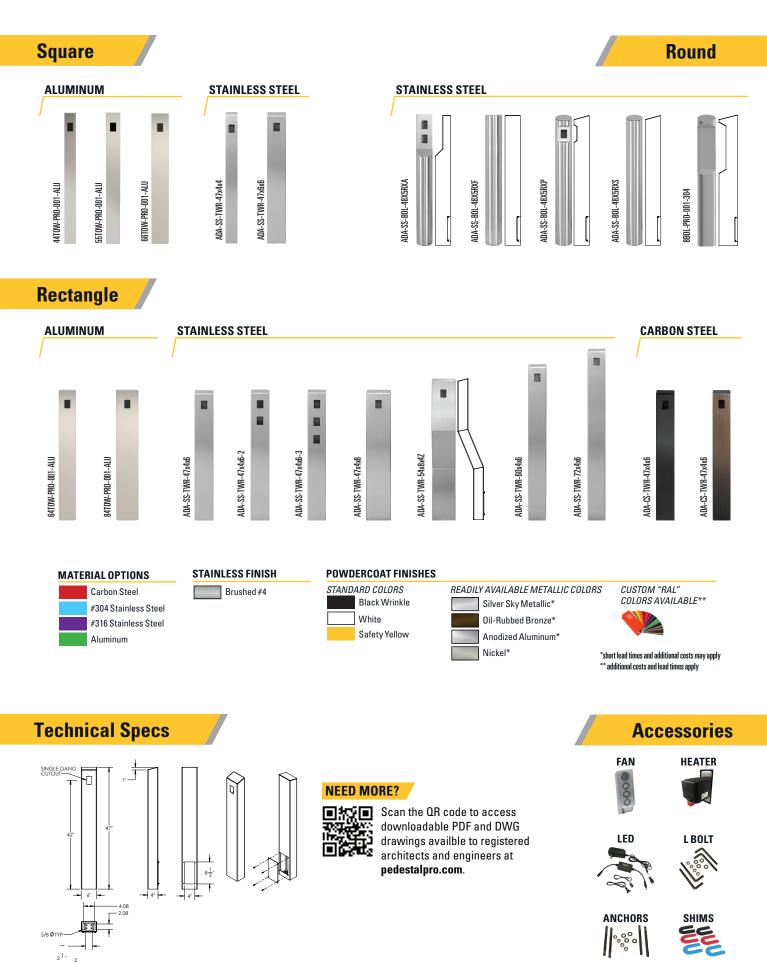

Key Features



STAINLESS STEEL

ALL MODELS:

Removable Access Panel Ease of installation



ALUMINUM

"Anodized Aluminum" Powder Coat

Powder coated with a UV inhibitor

E

Hidden Fasteners

Contribute to the sleek design

Part Numbers

Rectangle Bollards	Hgt	Wdth	Dpth	Wgt	Material	Finish	Description	Cutouts Included	Mnt Hgt
ADA-CS-TWR-47x4x6	47″	6′	4″	35 lbs	Carbn Stl	Powdercoat - Black Wrinkle	47" Stl Twr, Arch, Blck	Single Gang	42
ADA-SS-TWR-47x4x6	47″	6′	6″	35 lbs	304 SS	Brushed #4	47″ Stl Twr, Arch, Blck (6″ 1	ace) Single Gang	42
ADA-SS-TWR-47x4x6-2	47″	6′	6″	35 lbs	304 SS	Brushed #4	47" Stl Twr, Arch, Blck (6" f	ace) 2 Single Gang	36, 42
ADA-SS-TWR-47x4x6-2	47″	6′	6″	35 lbs	304 SS	Brushed #4	47″ Stl Twr, Arch, Blck (6″ 1	ace) 3 Single Gang	36, 42
ADA-SS-TWR-47x4x6-3	47″	6′	6″	35 lbs	304 SS	Brushed #4	47″ Stl Twr, Arch, Blck (6″ 1	ace) Single Gang	29, 36, 42
ADA-SS-TWR-47x4x8	47″	6′	8″	75 lbs	304 SS	Brushed #4	47″ Stl Twr, Arch, Blck (8″ 1	ace) Single Gang	42
ADA-SS-TWR-54x8x4Z	54″	6′	8″	85 lbs	304 SS	Brushed #4	47″ Stl Twr, Arch, Blck (8″ 1	ace) Single Gang	48
ADA-SS-TWR-60x4x6	60″	6′	6″	45 lbs	304 SS	Brushed #4	47″ Stl Twr, Arch, Blck (6″ 1	ace) Single Gang	45
ADA-SS-TWR-72x4x6	72″	6′	6″	55 lbs	304 SS	Brushed #4	47″ Stl Twr, Arch, Blck (6″ 1	ace) Single Gang	66
64TOW-PRO-001-ALU	47″	6′	6″	30 lbs	Alum	Powdercoat "Anodized Alum"	47″ Stl Twr, Arch, Blck (6″ 1	ace) Single Gang	42
84TOW-PR0-001-ALU	47″	6′	8″	30 lbs	Alum	Powdercoat "Anodized Alum"	47" Stl Twr, Arch, Blck (8" 1	ace) Single Gang	42
Square Bollards	Hgt	Wdth	Dpth	Wgt	Material	Finish	Description	Cutouts Included	Mnt Hgt
ADA-SS-TWR-47x4x4	47″	4′	- 4″	29 lbs	304 SS	Brushed #4	47" Stl Tower, Arch (4" fac	e) 2 Single Gang	42
ADA-SS-TWR-47x6x6	47″	6'	6″	45 lbs	304 SS	Brushed #4	47" Stl Tower, Arch (6" squ	, 0 0	42
44TOW-PR0-001-ALU	47″	4'	4″	20 lbs	Alum	Powdercoat "Anodized Alum"	47" Stl Tower, Arch (4" fac	, , ,	42
55TOW-PRO-001-ALU	47″	5′	5″	25 lbs	Alum	Powdercoat "Anodized Alum"	47" Stl Tower, Arch (5" fac		42
66TOW-PRO-001-ALU	47″	6′	6″	35 lbs	Alum	Powdercoat "Anodized Alum"	47" Stl Tower, Arch (6" fac	, 0 0	42
Round Bollards	Hgt	Wdth	Dpth	Wgt	Material	Finish Des	scription	Cutouts Included	Mnt Hgt
ADA-SS-BOL-48X5RXA	48″	5′	5″	35 lbs	304 SS	Brushed #4 48"	Stl Bollard, Arch (flat top)	Single Gang	38.5, 43.5
ADA-SS-BOL-48X5RXF	48″	5′	5″	35 lbs	304 SS		Stl Bollard, Arch (flat top)	None (cutouts can be added	
ADA-SS-BOL-48X5RXP	48″	5′	5″	35 lbs	304 SS		Stl Bollard, Arch, Blck (slante		40.5
ADA-SS-BOL-48X5RXS	48″	5′	5″	35 lbs	304 SS		Stl Bollard, Arch, Blck (slante	1, 0 0	
8BOL-PRO-001-304	56"	8'	8″	79 lbs	304 SS		Stl Bollard, Arch, Blck (8" rou		
	_	• •							
Accessories	Desci	ription				Ac	cessories Desc	ription	
ACC-FAN-001-304	Pedes	tal Cooli	ng Fan	(12 VDC/	2amp power	supply included) ST	UD-ANCHOR-625 5/8" S	tud Anchor Kit (for existing	construction
ACC-LED-001	LED-001 Pedestal LED Light Kit (12 VDC/2amp power supply included)				⁻ supply included) L-E	L-BOLT-625 5/8" L-Bolt Mounting Kit		construction)	
ACC-HEA-001-304	Pedes	tal Heat	er Kit 25	50W (Fits	bollard dime	nsions 4x4 or larger) Sh	im-Kit-001 Level	ing Shim Kit: 1/16", 1/8", 1/4"	(2 each)

Bollard Options


TECH INTEGRATION

Integrate intercoms, keypads, card readers, cameras and more from our vast device library representing over 35 OEM brands and 400+ devices. Our engineers are ready to incorporate your tech into our bollards. We also offer in-house cooling fans, heaters, LED lighting, and weather shrouds solutions to meet all your tech integration needs.



FREE CUSTOM CAD

CAD engineers are free to use and on-call to create drawings specific to your project requirements. CAD designs are created within 24 hours.



EXPEDITED FABRICATION

12 — 15 days	Standard, no additional charge
10 – 11 days	15% fee
8 – 9 days	25% fee
6 – 7 days	45% fee
4 – 5 days	65% fee
2 – 3 days	100% fee

Business days exclude weekends and holidays, does not include shipping costs or timelines.

Product Categories



Stands



Call Towers



Mounts



Cabinets



Housings





.

Why Pedestal PRO

CUSTOMIZATION = QUICKEST TURNAROUND = HIGHEST QUALITY

With more than 500,000 installations worldwide, including projects for Fortune 100 companies, Pedestal PRO manufactures unique mounting solutions to support consultants, integrators, and installers in the security industry.

Using the most precise device integration methods available, Pedestal PRO custom designs premium pedestals, housings, and mounts to accommodate any physical security device or technology specified by its customers.

Recommended readily-available materials, expedited production timelines, and on-time delivery ensures total satisfaction for every project, every time.



