




BP48VP2U03 EXTENDED BATTERY MODULE

The Extended Battery Module offers extended run-times during power outages.

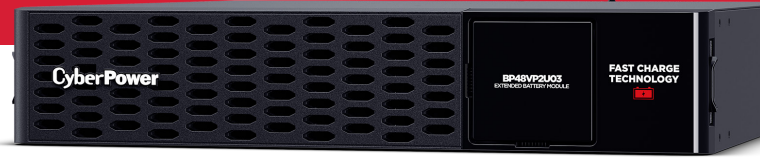

The CyberPower BP48VP2U03 is a rack/tower convertible Extended Battery Module (EBM) that extends battery runtimes during power outages and is designed for the following Smart App Sinewave UPS systems: PR2200RTXL2UAN, PR3000RTXL2UAN, PR2200RTXL2UHVAN, PR3000RTXL2UHVAN.

This EBM takes 2U of rack space and can be installed in either a rack or tower configuration to match the UPS form factor. Battery equalization technology improves battery life, and toolless battery panel access makes battery replacement fast and simple.

With a three-year lifetime limited warranty, you can trust CyberPower's commitment to the quality of the BP48VP2U03.

COMPATIBLE APPLICATIONS

- PR2200RTXL2UAN
- PR3000RTXL2UAN
- PR2200RTXL2UHVAN
- PR3000RTXL2UHVAN

FEATURES

- 48 V/70 A Output
- Fast Charge Technology
- 2U Rack/Tower Form Factor
- Three-Years Limited Warranty

SPECIFICATIONS

GENERAL

Amperage	70A
DC Voltage	48V

BATTERY

Replacement Battery	RB1260X8
Built-in Charger	Yes
Battery Type	Sealed Lead-Acid
Battery Quantity	16
Typical Recharge Time	6 hours
Battery Size	12V/6Ah
User Replaceable	Yes
Replacement Battery Cartridge Quantity	2
Hot Swappable	Yes

PHYSICAL


Rack Size	2U
Color	Black

DIMENSIONS

Weight (kg)	41.1
Weight (lb)	90.6
Physical Dimensions - (WxHxD) (in)	17.1 x 3.4 x 24.8 (in)
Physical Dimensions - (WxHxD) (mm)	434 x 86 x 630 (mm)
Shipping - Dimensions (WxHxD, in)	22.6 x 10.8 x 30.1 (in)
Shipping - Dimensions (WxHxD, mm)	574.04 x 274.32 x 764.54 (mm)
Shipping - Weight (lb)	106.3
Shipping - Weight (kg)	48.22

BP48VP2U03 EXTENDED BATTERY MODULE

SPECIFICATIONS CONT.

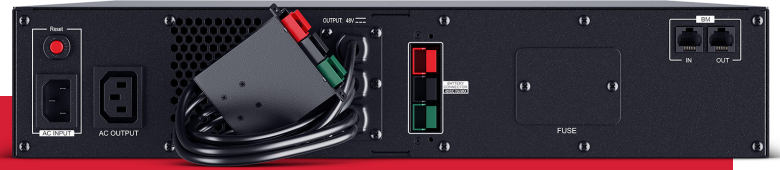

ENVIRONMENTAL

Operating Temperature	32°F to 104°F (0°C to 40°C)
Storage Temperature	5°F to 113°F (-15°C to 45°C)
Maximum Storage Elevation	50,000 ft (15,000 m)
Storage Relative Humidity	0 - 95% (non-condensing)
Operating Relative Humidity	0 - 95% (non-condensing)
Maximum Operating Elevation	10,000 ft (3,000 m)

CERTIFICATIONS

Environmental	RoHS Compliant
Safety	CE, RCM, UL1778, cUL, FCC Class B, VCCI

WARRANTY

Product Warranty	3 Years Limited
------------------	-----------------