


## 40/100/400G Multimode 50/125 OM3 Fiber Optic Cable (24F MTP/MPO-PC F/F), LSZH, Aqua, 3 m (9.8 ft.)

MODEL NUMBER: **N846B-03M-24-P**

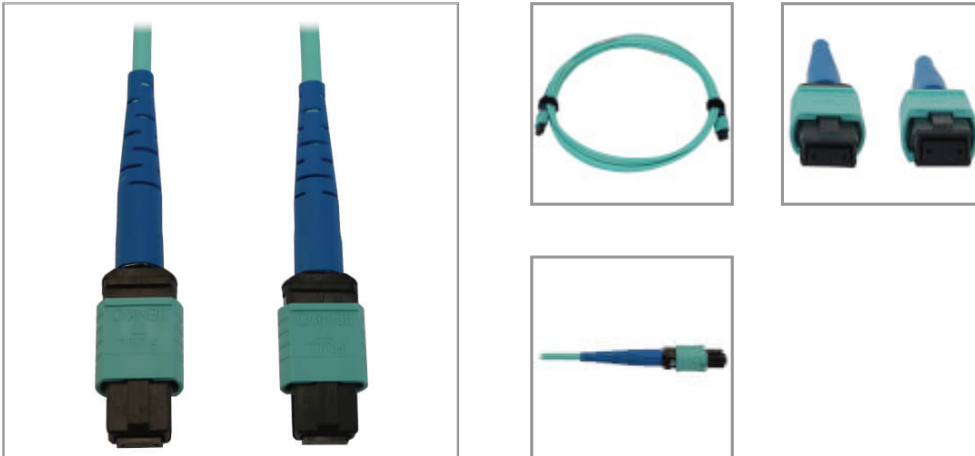

40/100/400 GbE Ethernet cable extends high-density connections between network components in enterprise applications in wiring closets, telecom rooms and data centers.

### Features

#### 40/100/400 GbE Cable Supports Higher Bandwidths for High-Density Data Networking

The N846B-03M-24-P is a premium multimode fiber optic cable that supports 400 Gb Ethernet speeds for transmitting data and voice signals over short distances. It is designed to support higher bandwidths for high-density patching between data center MDFs and IDFs in enterprise installations. This multimode 50/125 OM3 cable is an ideal choice for 400 Gb Ethernet applications up to 100 meters (328 feet) at 850 nm. It is also backward compatible with 10 Gb, 25 Gb, 40 Gb and 100 Gb networks, so you can future-proof your current application for an eventual upgrade to 400 Gb.

#### 100% Tested for Low Insertion Loss and Attenuation Loss

The cable is tested for low insertion loss on the factory-terminated 24-fiber MTP/MPO connectors and attenuation loss that meets or exceeds current standards. The connectors' slim boots allow easy one-handed installation and removal of the cable.

#### Aqua-Colored Jacket Helps Avoid Misidentification That Can Cause Costly Downtime

The OM3-rated cable has an aqua jacket to identify it as multimode in a crowded patch panel or switch and prevent it from becoming accidentally disconnected. The round low-smoke zero-halogen (LSZH) jacket limits the amount of toxic smoke emitted in case of combustion, making it suitable for poorly ventilated areas.

### Highlights

- OM3-rated cable recommended for 400 Gb speeds up to 100 meters (@ 850 nm)
- Backward compatible with 10/25/40/100 Gb networks to facilitate future-proofing
- Tested for low insertion loss and attenuation loss that meets or exceeds current standards
- Aqua LSZH jacket allows fast, easy identification in a crowded switch or patch panel

### Package Includes

N846B-03M-24-P 40/100/400G Multimode 50/125 OM3 Fiber Optic Cable, Aqua, 3 m (9.8 ft.)

## Specifications

| OVERVIEW     |              |
|--------------|--------------|
| UPC Code     | 037332271686 |
| Technology   | Multimode    |
| Optical Mode | OM3          |



|                                      |                               |
|--------------------------------------|-------------------------------|
| Mode Type                            | Multimode                     |
| <b>PHYSICAL</b>                      |                               |
| Cable Jacket Color                   | Aqua                          |
| Connector Color                      | Aqua; Black; Blue             |
| Cable Jacket Material                | LSZH                          |
| Cable Jacket Rating                  | OFNR                          |
| Cable Outer Diameter (OD)            | 3.0MM                         |
| Clad Diameter (microns)              | 125.0                         |
| Core Diameter (microns)              | 50.0                          |
| Primary Coating Diameter (microns)   | 245.0                         |
| Number of Fibers                     | 24                            |
| Cable Length (ft.)                   | 9.84                          |
| Cable Length (m)                     | 3.00                          |
| Cable Length (in.)                   | 118.1                         |
| Minimum Bend Radius                  | 20MM (DYNAMIC); 10MM (STATIC) |
| <b>ENVIRONMENTAL</b>                 |                               |
| Operating Temperature Range          | 14 TO 140 F (-10 TO 60 C)     |
| Storage Temperature Range            | 14 TO 140 F (-10 TO 60 C)     |
| Operating Humidity Range             | 5% TO 85% RH, NON-CONDENSING  |
| Storage Humidity Range               | 5% TO 85% RH, NON-CONDENSING  |
| <b>COMMUNICATIONS</b>                |                               |
| Network Compatibility                | 40 Gbps; 100 Gbps; 400 Gbps   |
| Wavelength                           | 1300nm; 850nm                 |
| Attenuation @ 850NM                  | 3.5dB/KM                      |
| Attenuation @ 1300NM                 | 1.5dB/KM                      |
| Insertion Loss                       | LESS THAN OR EQUAL TO 0.35dB  |
| <b>CONNECTIONS</b>                   |                               |
| Side A - Connector 1                 | 24-STRAND MTP/MPO (FEMALE)    |
| Side B - Connector 1                 | 24-STRAND MTP/MPO (FEMALE)    |
| Endface Polish                       | PC                            |
| <b>FEATURES &amp; SPECIFICATIONS</b> |                               |
| Push/Pull Tabs                       | No                            |



|                                     |                           |
|-------------------------------------|---------------------------|
| Optical Port                        | MPO/MTP                   |
| Breakout                            | No                        |
| Trunk                               | No                        |
| <b>STANDARDS &amp; COMPLIANCE</b>   |                           |
| Certifications                      | RoHS, REACH, CE, UL1666   |
| <b>WARRANTY</b>                     |                           |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

© 2021 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>