

OttoE PoE Series

Hardened/Industrial Unmanaged PoE 8 to 10-port Gigabit Ethernet Switch



Product Highlights

→ PoE Features

- IEEE 802.3bt 90W per port
- Total power budget up to 270W

→ PoE Watchdog (Patented)

- Data streaming monitoring for connected PD

→ SFP Connectivity

- Up to two 100/1000BASE SFP option

→ High Reliability

- Industrial Fanless Design
- 6Kv surge protection

→ Quality of Service

- PROFINET , EtherNet/IP

Overview

EtherWAN's OttoE PoE series is a hardened/industrial unmanaged Gigabit Ethernet switching platform, designed for easy deployment in harsh environments with limited space. It is a low-cost, easy-to-use device that combines essential industrial Ethernet networking functionality with rugged performance.

This versatile switch features full/half-duplex auto-negotiation and auto MDI/MDIX operation, allowing for convenient connection of a variety of network devices. QoS (Quality of Service) support allows for traffic prioritization and effective management of resources. A built-in watchdog feature supports the OttoE PoE switch as an intelligent device to prevent packet loss from powered devices in the network. The feature can be enabled per port via DIP switch to enhance the feature flexibility.

EtherWAN – "When Connectivity is Crucial."

Ordering Information

Gigabit Ethernet Models

TG103-0800	8-port 10/100/1000BASE-TX PoE Industrial (-10 to 60°C) Unmanaged Switch
TG103-0802	8-port 10/100/1000BASE-TX PoE + 2-port 100/1000BASE SFP Industrial (-10 to 60°C) Unmanaged Switch
TG103-0442	4-port 10/100/1000BASE-TX PoE + 4-port 10/100/1000BASE-TX + 2-port 100/1000BASE SFP Industrial (-10 to 60°C) Unmanaged Switch
TG103H-0800	8-port 10/100/1000BASE-TX PoE Hardened (-40 to 75°C) Unmanaged Switch
TG103H-0802	8-port 10/100/1000BASE-TX PoE + 2-port 100/1000BASE SFP Hardened (-40 to 75°C) Unmanaged Switch
TG103H-0442	4-port 10/100/1000BASE-TX PoE + 4-port 10/100/1000BASE-TX + 2-port 100/1000BASE SFP Hardened (-40 to 75°C) Unmanaged Switch

Hardware Specifications

Interface		+
Ethernet	10/100/1000BASE-TX: 8 ports 100/1000BASE-SFP: 0 or 2 ports	
LED Indicators	Per Unit: Power 1 (Green), Power 2 (Green), Fault (Red) Per Port: Link/Activity (Green)	
Alarm Contact	One relay output with current 0.5A@48VDC	
Dip Switch	No.1 - 8: Port 1 to 8 Watchdog ON/OFF EXT: The timer enables Watchdog (ON: 5 min. / OFF: 10 min.)	

Technology		+
Standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/FX IEEE 802.3az Energy Efficient Ethernet IEEE 802.1p Quality of Service (QoS) IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/1000BASE-LX IEEE 802.3af/at/bt Power over Ethernet	
Forward/Filtering Rate	14,880pps for 10Mbps 148,810pps for 100Mbps 1,488,100pps for 1000Mbps	
Packet Buffer Memory	1.5M bits	
Processing Type	Store-and-Forward Auto Negotiation Half-duplex back-pressure and IEEE Auto MDI/MDIX	
Address Table Size	4K MAC	

Power		+
Input	46-57VDC (Terminal Block)	
Power Consumption	9.72W (without PoE)	
Protection	Reverse Polarity Protection	
PoE Power Output	Up to 90W/port Power Budget: 270W	

** 46-57VDC for IEEE 802.3af type 1, ≤15.4W PD devices.
52-57VDC for IEEE 802.3at/bt type 2/3, 30W, 60W PD devices.
54-57VDC for IEEE 802.3bt, type 4, 90W PD devices.

Physical		+
Casing Material	Metal	
IP Rating	IP30	
Dimensions	45x125x145mm (W x D x H) (1.77"x4.92"x5.71")	
Weight	577g (1.27lbs)	
Installation	DIN-Rail (Top hat type 35mm) mounting	

Environmental		+
Operating Temp.	TG103: -10 to 60°C (14 to 140°F) TG103H: -40 to 75°C (-40 to 167°F)	
Storage Temp.	-40 to 85°C (-40 to 185°F)	
Relative Humidity	5% to 95% (non-condensing)	

Regulatory		+
ISO	Manufactured in an ISO 9001 facility	
Safety	UL 61010	
EMI	FCC Part 15 B VCCI Class A EN 61000-6-4 ICES-003 EN 55032	
EMS	EN 61000-6-2 - EN 61000-4-2 (ESD) - EN 61000-4-3 (Radiated RFI) - EN 61000-4-4 (Burst) - EN 61000-4-5 (Surge) - EN 61000-4-6 (Induced RFI) - EN 61000-4-8 (Magnetic field)	
Environmental Test Compliance	IEC 60068-2-6 Fc (Vibration) IEC 60068-2-27 Ea (Shock) IEC 60068-2-31 (Free fall w/package)	
Industrial	EN 50121-4	
Traffic	NEMA TS2 (TG103H)	

Warranty		+
Length	Limited Lifetime	
Details	www.etherwan.com/support/warranty-policy	

What's Included		+
Device	Ethernet switch	


Accessories

Part Number	Speed Info	Mode	Distance	Operating Temperature	Wavelength	DDM
EX-0155NSP-MB2L-A	100Mbps	Multi	2km	-40 to 85°C	1310nm	
SFPMIS20M	100Mbps	Single	20km	-40 to 85°C	1310nm	✓
SFPGIM5AM	1000Mbps	Multi	275m/550m	-40 to 85°C	850nm	✓
SFPGIM02M	1000Mbps	Multi	2km	-40 to 85°C	1310nm	✓
SFPGIS10M	1000Mbps	Single	10km	-40 to 85°C	1310nm	✓

Optional Accessories

NDR-480-48 480W 48VDC DIN-Rail Power Supply

Dimensions

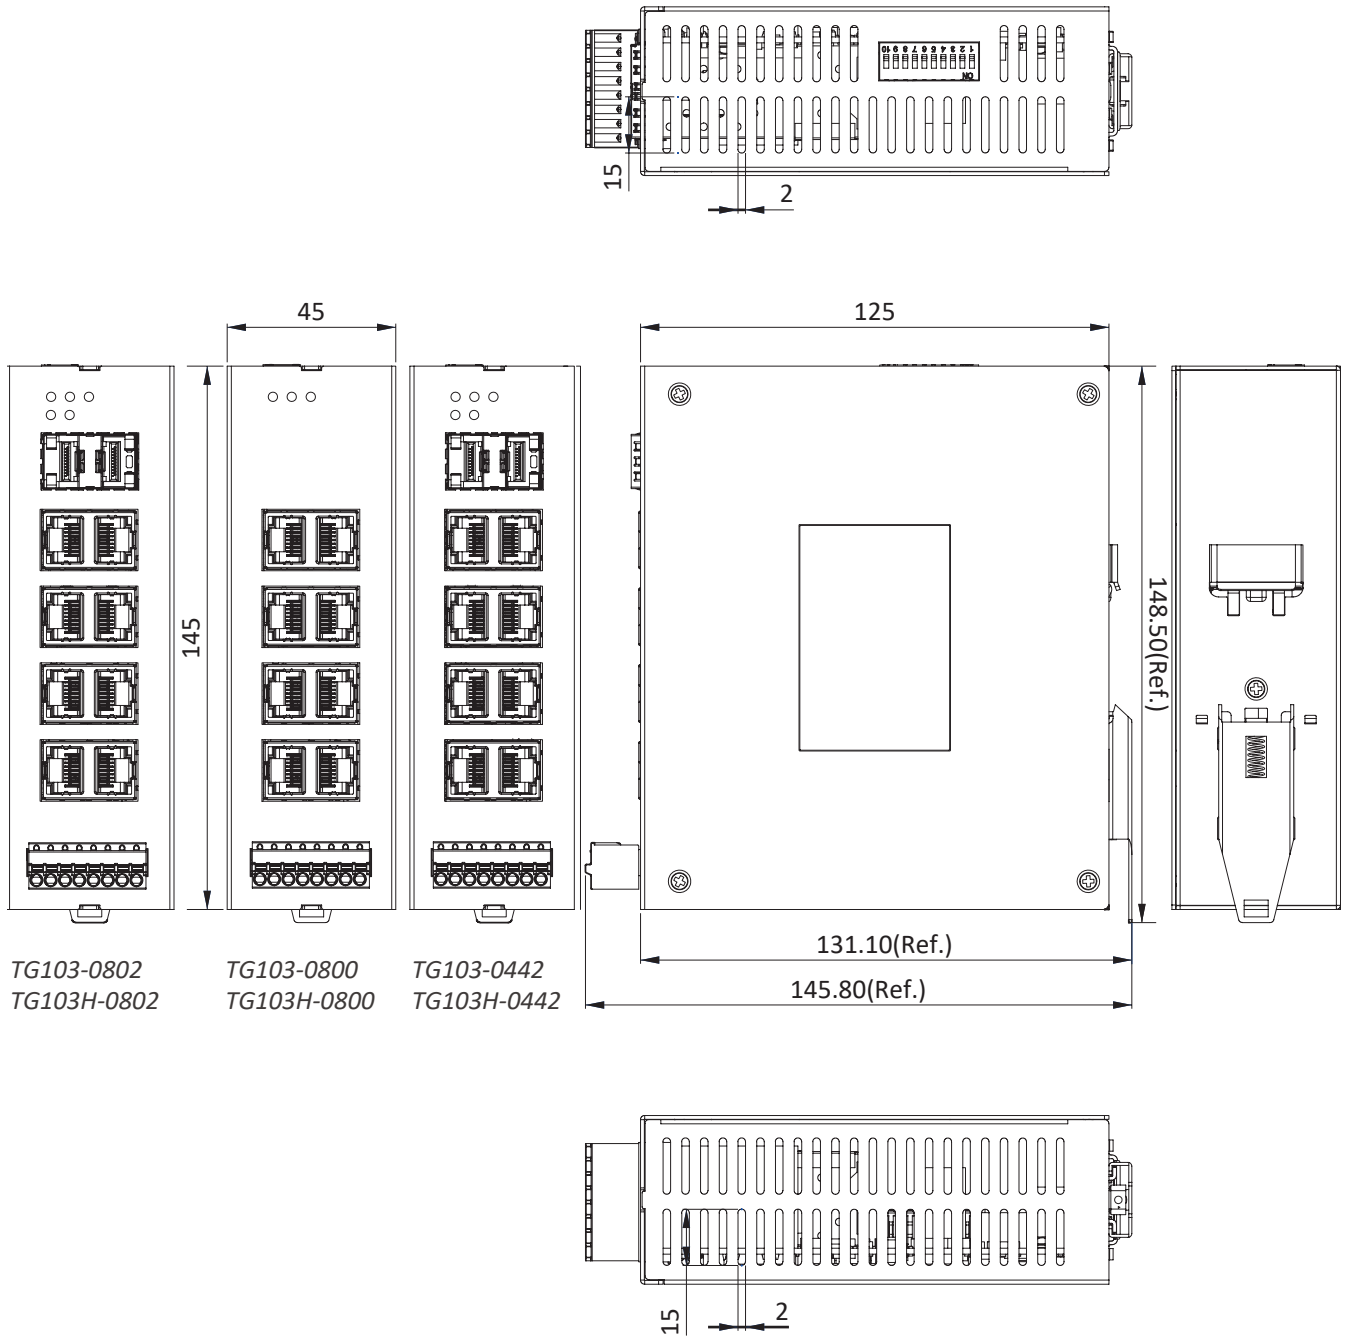

© EtherWAN Systems, Inc. All rights reserved. 20240123

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.