



**WATCHMAN**<sup>®</sup>  
Your Virtual Security Guard

**WXP** model

WIEGAND EXPANSION PANEL  
4 Door Controller

by cellgate

Expanded Wiegand Functionality for all Watchman Models



WXP



## Part Numbers

AAWX-VZN  
AAWX-ATT  
AAWX-INT



**Part Number:**  
CB-WIM-2000  
**1 Wiegand Expansion Board per door/gate**  
1 Wiegand, 2 inputs, 2 relays

\*\*Each WXP requires a minimum of 1 CB-WIM-2000  
\*\*One board per entry point

## Key Features

- Supports 4 doors or gates
- Cellular or internet models available
- Verizon or AT&T LTE service, ships with both SIM cards  
*\*no VoIP fees required*
- Compatible with any 26-bit Wiegand reader; \*CellGate readers available  
*\*cypress converter required for Transcore readers*
- Restricted credential profiles
- Integrates with any Watchman product through TrueCloud Connect™

powered by:



## WXP Expand Your Watchman Application Options



## Management, Control and Flexibility of all Access Devices



Prox



RFID



Fobs



Codes



Virtual Keys

cellgate<sup>®</sup> | TOTAL PROPERTY WIRELESS ACCESS



1.855.694.2837

cell-gate.com



**WATCHMAN®**  
Your Virtual Security Guard

**WXP** model


WIEGAND EXPANSION PANEL  
4 Door Controller

by cellgate

COMING SOON!

**CR CellGate Readers**

**Universal Specs:** All three readers are 12V DC, 26-bit Wiegand compatible, IP65-rated.



**CR-INFINITY**

- Prox card 125kHz & 13.56MHz
- Bluetooth 5.0
- Keypad
- QR Code Camera



**CR-READER**

- Prox card 125kHz & 13.56MHz
- Bluetooth 5.0



**CR-KEYPAD**

- Prox card 125kHz & 13.56MHz




Connecting integrations:



... CONNECTING ...



- Fully integrated solutions ecosystem
- The engine that manages all product hardware, data transport, CellGate app(s) and user administration
- Single login for multiple properties
- Administrative privileges for multiple user tiers

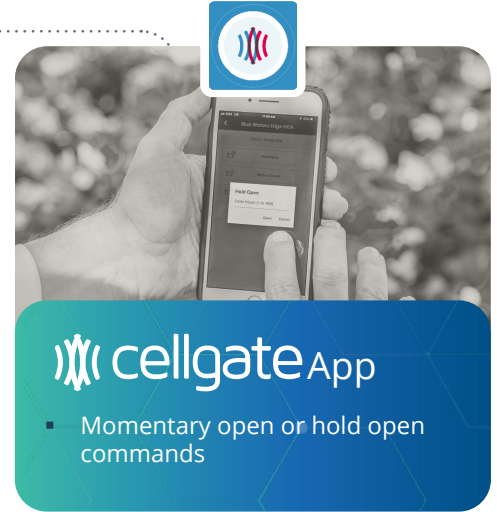

Apps Available on the App Store and Google Play



**Specifications** ✓

- Up to 4 Wiegand inputs per system
- 8 configurable (NO/NC) relays
- 8 digital inputs for monitoring and triggering relays or cameras
- 10,000 local codes and 65,000 non-local access codes total (4-5 digit codes)
- NEMA 3 steel electronics enclosure: 15"x12"x6"
- Operating temperature: -20°C - 55°C -4°F - 131°F
- Power (12v DC) 5 Amp transformer/power supply
- Integrates with any CellGate product through TrueCloud Connect™



cellgate® | TOTAL PROPERTY WIRELESS ACCESS



1.855.694.2837

cell-gate.com