


THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION SUBJECT TO CHANGE WITHOUT NOTICE.


| ZONE | REV | DESCRIPTION | DATE | APPV. |
|------|-----|-----------------|------------|-------|
| - | A | INITIAL RELEASE | 04/19/2018 | E.A. |
| - | B | 118 was 118.6 | 10/25/18 | E.A. |

| ITEM | PARAMETER |
|--------------------------------------|-------------------------|
| SLEEVE | ZIRCONIA |
| INSERTION LOSS | ≤ 0.2dB |
| WAVE LENGTH | 850 & 1300nm |
| MATING DURABILITY (1000 TIMES) | ADDITIONAL LOSS ≤ 0.1dB |
| TEMPERATURE STABILITY 0-40C C~ 85 C) | ADDITIONAL LOSS ≤ 0.2dB |
| OPERATING TEMPERATURE | -40° C ~+75° C |
| STORAGE TEMPERATURE | -40° C ~+75° C |

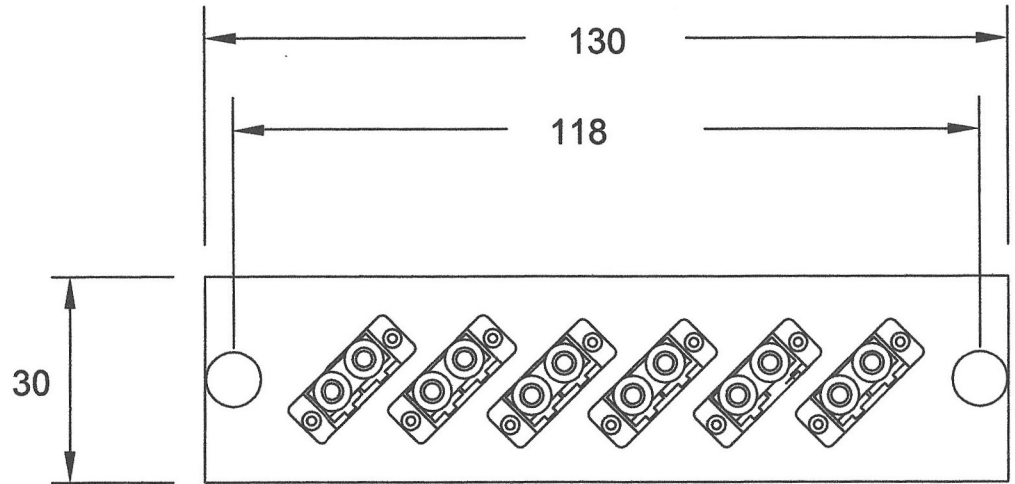

NOTES:

1. PLATE MATERIAL - 1.5MM COLD ROLLED STEEL. FINISH-BLACK POWDER COAT.
2. SNAP PIN P/N: M-533, QUANTITY 2.
3. MULTIMODE LGX STYLE.

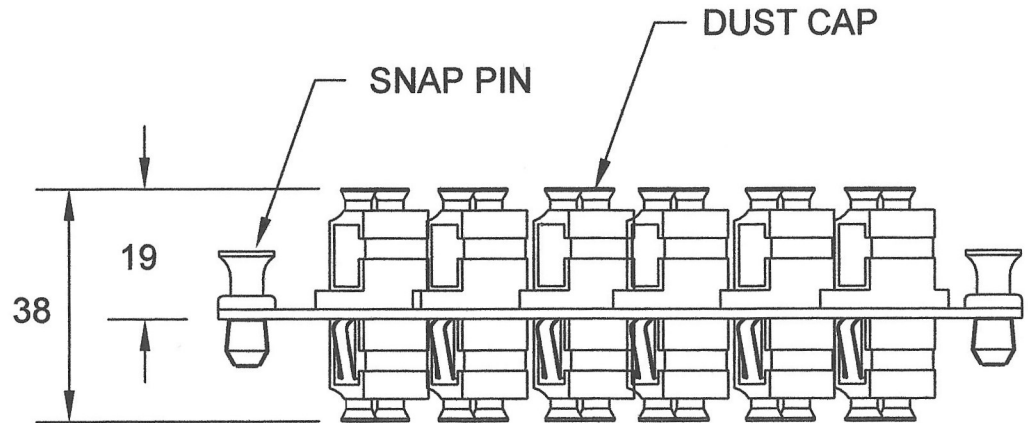

e-mail.....sales@dynacomcorp.com
Hayward, California

ALL DIMENSIONS ARE IN MM.

| | | |
|---------------------------------------|------------------------|---------------|
| NEXT ASSY: - | DRAWN: E.A. 05/20/2018 | CHECKED: - |
| TITLE: 6 Port LC Duplex Adapter Panel | | 920A-LC2-6-AQ |
| | | REV. B |