



powered by  
Eagle Eye Networks


## Capture Cloud VMS

### WHAT IS THE CAPTURE CLOUD VMS?

The Capture Cloud VMS is a fully managed cloud video surveillance solution, delivering an end-to-end video management system that's simple to deploy and easy to use. It supports all modern browsers and works on Windows, Mac, even Linux with no plugins to install.

### FULLY MOBILE

View video anytime, anywhere. The fully functional iOS and Android applications provide complete access to live and recorded video and can also be used to install, configure and manage the system.



### GOT CLOUD?

Capture Cloud provides a cloud based, video management system. The CMVR is installed onsite, connects to your cameras, records video locally, and then securely synchronizes both video and meta data to the Capture Cloud Data center. It's a robust, secure appliance specifically designed to overcome the demands of transmitting high-resolution video through the Internet.

### COMPREHENSIVE CAMERA SUPPORT

We believe camera compatibility is important. There's no need to be locked into a single camera vendor. Businesses need the flexibility to work with the cameras that they choose. Bridges and CMVRs support ONVIF Profile S IP cameras. Combo Bridges and CMVRs support IP as well as NTSC and PAL analog cameras. For an up to date list of all compatible cameras visit [www.een.com/cameras](http://www.een.com/cameras).

### WORRY FREE MANAGEMENT

All of the software in the Capture Cloud and firmware on the Bridge is managed and updated by Eagle Eye Networks.

### SECURITY SIMPLIFIED

With Eagle Eye Complete Privacy Encryption™, video is fully encrypted during transmission and at rest. The Bridge has no open ports to the Internet, eliminating security vulnerabilities commonly found in other systems and requiring no router or firewall adjustments.

# Compact CMVR

224+ / 225 / 324+ / 325



The Eagle Eye Cloud Managed Video Recorder (CMVR) stores video and acts as a gateway from your premises to the Eagle Eye Cloud Data Center where your video can also be stored and managed by the Eagle Eye Cloud VMS. It provides video storage, video buffering, a secure connection, bandwidth management, and monitoring of cameras.

These small form factor CMVRs are suitable for applications up to 8 cameras at 4 MP when a server rack is not available. They are suitable for wall or shelf mounting. The CMVR 225/325 is a ruggedized, all aluminum version with a broader industrial temperature range and includes 4 POE ports for direct camera connection. It is sometimes utilized in vehicle applications.

### RECORDING FEATURES


- Video encrypted in transit and at rest
- Fully cloud managed
- Intelligent Bandwidth Management with local buffering
- Motion or continuous recording
- Optional audio recording

### WEB INTERFACE & MOBILE FEATURES

- Native iOS and Android apps
- View live and recorded video
- Compatible with all modern browsers
- Motion detection with alerts
- Map and floorplan display

### SYSTEM ADMINISTRATION

- 100% browser-based; no software
- Granular user permissions
- Multi-site support
- Point and click video sharing
- Centralized management

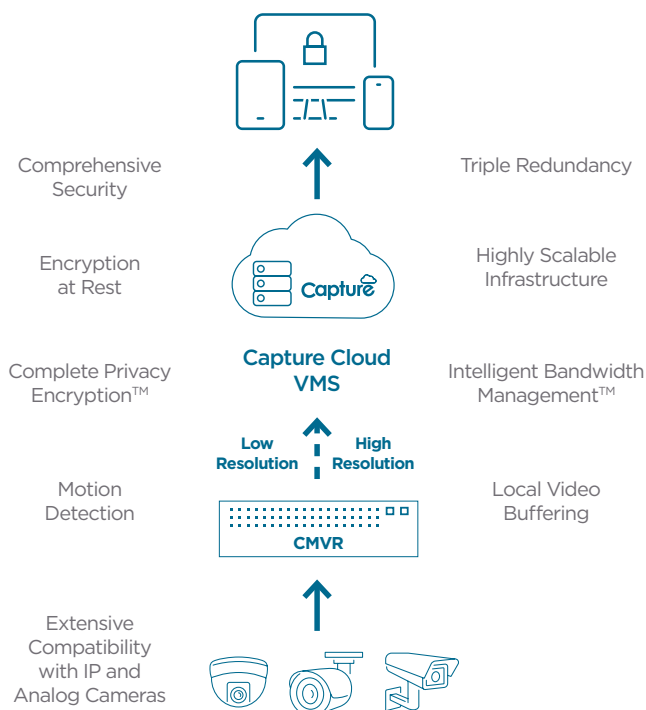

## NETWORK FEATURES

- Automatic network configuration
- Secure camera network (dual network ports)
- No inbound connections needed
- Packet loss detection/reporting
- Network disconnected alerts

## MANAGEMENT FEATURES

- Remote management
- Automatic camera discovery
- Automatic camera configuration
- Advanced motion detection
- Local video buffering
- Configuration synced to Cloud
- Camera trouble alerts
- Internet outage alerts
- Fully cloud managed



## STANDARD SUPPORT

- Free of charge with an active subscription
- Warranty - 2 years
- 24/7 email and web support
- 8 a.m. to 6 p.m. phone support



MODEL	CMVR 224+	CMVR 225	CMVR 324+	CMVR 325	CMVR 426+	CMVR 524+
Max Cameras*	Up to 6 IP Cameras @4MP	Up to 6 IP Cameras @4MP	Up to 12 IP Cameras @4MP	Up to 8 IP Cameras @4MP	Up to 20 IP Cameras @4MP	Up to 25 IP Cameras @4MP
Max Analytic Count*	5	5	5	5	15	20
LPR Support*	No	No	No	No	Up to 2 LPR cameras	Up to 4 LPR Cameras
Storage Capacity	2TB (60 days for 6 cameras @ 1MP)	1TB (30 days for 6 cameras @ 1MP)	4TB (60 days for 12 cameras @ 1MP)	2TB (45 days for 8 cameras @ 1MP)	16TB (35 days for 20 cameras @ 4MP)	16TB (30 days for 25 cameras @ 4MP)
POE Camera Ports	None	4 ports, Class 3	None	4 ports, Class 3	None	None
Network Ports	Dual Gigabit	1 Gigabit, 4X100 Megabit	Dual Gigabit	1 Gigabit, 4X100 Megabit	1 Gigabit, 4X100 Megabit	1 Gigabit, 4X100 Megabit
Video Output	HDMI (1), VGA (1)	HDMI (1), DP (1)	HDMI (1), VGA (1)	HDMI (1), VGA (1)	HDMI (2)	HDMI (1), DP (1)
Dimension	180x 127 x 64 mm 7.08 x 5.00 x 2.50 in	127 x 172 x 75 mm 5.00 x 6.77 x 2.95 in	180x 127 x 64 mm 7.08 x 5.00 x 2.50 in	127 x 172 x 75 mm 5.00 x 6.77 x 2.95 in	229 x 127 x 83 mm 9.00 x 5.00 x 3.25 in	229 x 127 x 83 mm 9.00 x 5.00 x 3.25 in
Weight	1.20 kg 2.65 lbs	1.32 kg 2.91 lbs	1.37 kg 3.03 lbs	1.36 kg 3.0 lbs	2.39 kg 5.27 lbs	2.39 kg 5.27 lbs
Maximum Power Consumption	External 100-240 VAC, 20 W	External 100-240 VAC, 22 W	External 100-240 VAC, 20 W	External 100-240 VAC, 22 W	External 100-240 VAC, 22 W	External 100-240 VAC, 22 W
Operating Temperature Range	-10-50° C 14-122° F	-10-50° C 14-122° F	-10-50° C 14-122° F	-10-50° C 14-122° F	-10-50° C 14-122° F	-10-50° C 14-122° F
Operating Humidity Range	0-70%	0-70%	0-70%	0-70%	0-70%	0-70%
Certifications	FCC, UL, CE, UKCA, PSE, NOM, ACM, RoHS, CTick, WEEE	UL, CE, PSE, CB, TIS	FCC, UL, CE, UKCA, PSE, NOM, ACM, RoHS, CTick, WEEE	UL, CE, PSE, CB, TIS	FCC, UL, CE, UKCA, PSE, NOM, ACM, RoHS, CTick, WEEE	FCC, UL, CE, UKCA, PSE, NOM, ACM, RoHS, CTick, WEEE
Rapid Replacement Part Numbers	EN-RR224p-1 (Monthly) EN-RR224p-12 (Yearly)	EN-RR225-1 (Monthly) EN-RR225-12 (Yearly)	EN-RR324p-1 (Monthly) EN-RR324p-12 (Yearly)	EN-RR325-1 (Monthly) EN-RR325-12 (Yearly)	EN-RR426p-1 (Monthly) EN-RR426p-12 (Yearly)	EN-RR524p-1 (Monthly) EN-RR524p-12 (Yearly)

\* Typical - please utilize the Eagle Eye VMS Bridge Wizard for precise capacity