


18/2 RISER RATED, SHIELDED SECURITY & CONTROL CABLE



18 AWG 2 Stranded Conductors, Shielded

Ratings CMR, CL3R, FT4
 Approvals ETL Listed

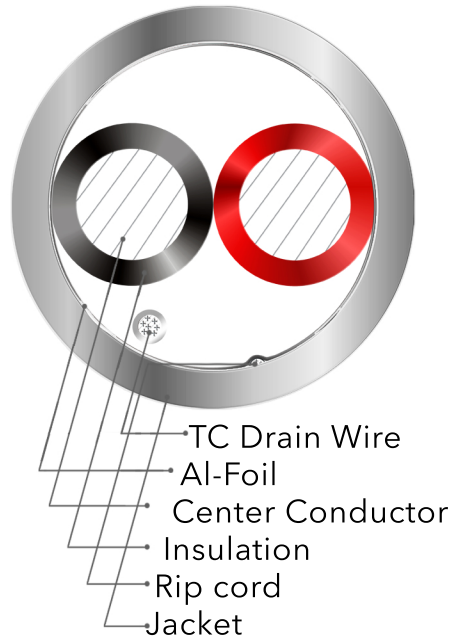

Construction

Conductor 18 AWG 19 Strand Bare Copper
 Conductor Count 2
 Insulation PVC (0.011" nom.)
 Insulation Colors Black, Red
 Lay Length 2.53" nom.
 Shielding Aluminum Foil/Mylar w/24 AWG Tinned-Copper Drain
 Rip Cord Yes
 Jacket PVC (0.016" nom.)
 Overall Diameter 0.154" nom.

Print Legend ADI PRO RN-XXXXXXX OXYGEN
 REE 2C18 SHIELDED 3180662 C(ETL)US CL3R 75C,
 CMR FT4 RoHS LOT#XXXX MMDDYY XXXXFT

Properties

Operating Voltage 300 Volts max.
 DC Resistance 6.66 Ohms/1000' at 20°C
 Capacitance 42.9 pF/ft. nom.
 Temperature -20°C to 75°C
 Flame Rating UL 1666 (Riser);
 CSA C22.2 No. 2556 (FT4)
 RoHS Compliant Yes
 Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-82SR109	GREY	1000FT	EXPRESS BOX



For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands