

HIKVISION

DS-C10S-S11-E: Video Wall Controller

General Information/Key Features

- Fluent video output
- FPGA-based hardware design
- Live view in the roaming window

Related Pages (Right click to open in new tab)

Shop Now. Visit the [DS-C10S-S11-E](#) product page for detailed information

View [other Hikvision Video Wall Controllers](#)

View over 1300 [video surveillance products from Hikvision](#)

Scroll down to view the Hikvision DS-C10S-S11-E specification sheet



HIKVISION

DS-C10S-S11-E

<https://www.surveillance-video.com> is a distributor/reseller of over 120,000 security products from over 100 brands.

For over 45 years, we have earned the confidence of our customers by providing professional service and support.

If you need technical support or assistance to install your security system or any other products purchased from Surveillance-video.com, you can call us @ **800-955-5201** at any time.

DS-C10S SERIES VIDEO WALL CONTROLLER



Features and Functions

- A signal source can be displayed on the $M \times N$ ($M \geq 1, N \geq 1$) display units
- FPGA-based hardware design with high bandwidth for accessing and processing the high-definition signal
- 10 kinds of signal sources are supported, including VGA, DVI, HDMI, BNC, SDI, YPbPr, Ultra HD, HDBaseT, HDTV, DP and IP camera input
- Live view in the roaming window and signal source list
- Fluent video output
- Window spanning for up to 16ch@8.0 MP
- An enhanced network decoding board supports H.264 and H.265 compression standard and can display network signal of 2-ch@8.0 MP, 2-ch@6.0 MP, 2-ch@5.0 MP, 8-ch@1080p, 16-ch@720p and 32-ch@D1 and local video files
- Supports 1/4/9/16 split screen layout
- Up to 6 image layers can be displayed on one screen, including one virtual LED image layer and a background layer
- Adjustable LED font size, background color and moving type
- Up to 16384 × 8192 for background layer's resolution
- Users are able to manage the signal source and video wall via client software
- Provides DVI dual link signal collection card whose input resolution is up to 4088×4088/15 Hz
- A build-in matrix for opening a signal source on several windows at the same time
- Supports HD/3G SDI synchronous output
- Supports cross-window video roaming
- Supports SADP searching active devices
- Resets the administrator password
- Supports adjusting the output to match the virtual output
- The client software is able to manage 16 devices and 4 video walls
- Supports HDTV signal and reverse PTZ control
- Remote control via ipad client software and IE browser
- Supports preview list for signal sources
- Intelligent fan to automatically adjust the fan speed according to the temperature



Specifications


C10S Series				
Module		DS-C10S-S11/E	DS-C10S-S22/E	DS-C10S-S41/E
Hardware	Slot No.	11 (6 × Input, 5 × Output)	22 (12 × input, 10 × output)	41 (23 × input & 18 × output)
Motherboard (DS-C10S-MSU)	Network	1; 10M/100M/1000M self-adaptive Ethernet interface		
	USB	1 × USB 2.0 (Reserved)		
	RS-232	2		
Network Decoding Board (DS-C10S-SI)	Decoding Performance	2-ch@5 MP; 4-ch@1080p; 8-ch@720p; 16-ch@D1		
Enhanced Network Decoding Board (DS-C10S-SI/UH)	Decoding Performance	2-ch@8 MP (low frame rate), 2-ch @6 MP (full frame rate), 2-ch @5 MP (full frame rate), 8-ch @1080p, 16-ch @720p, or 32-ch @D1, supporting H.265		
BNC Input Board (DS-C10S-BI/8)	Input	8 × BNC interface; PAL/NTSC self-adaptive		
VGA Input Board (DS-C10S-VI/2E, DS-C10S-VI/4E)	Input	4/2 × VGA interface		
	RGB Resolution	HD15 interface (DVI-HD15 adaptor is needed.) Resolution: 720p@60 Hz, 1024 × 768@60 Hz, 1024 × 768@75 Hz, 1280 × 1024@60 Hz, 1280 × 1024@75 Hz, 1366 × 768@60 Hz, 1400 × 1050@60 Hz, 1080p@60 Hz, UXGA@60 Hz, 1920 × 1200@60 Hz		
DVI Input Board (DS-C10S-DI/2E, DS-C10S-DI/4E)	Input	4/2 × DVI interface		
	DVI Resolution	720p@50 Hz, 720p@60 Hz, 1024 × 768@60 Hz, 1024 × 768@75 Hz, 1280 × 1024@60 Hz, 1280 × 1024@75 Hz, 1366 × 768@60 Hz, 1400 × 1050@60 Hz, 1080p@50 Hz, 1080p@60 Hz, UXGA@60 Hz, 1920 × 1200@60 Hz		
DVI Dual Link Input Board (DS-C10S-HDI/1)	Digital Signal Input Resolution	2048 × 1536@30 Hz, 2560 × 1440@30 Hz, 2560 × 1600@30 Hz, 2560 × 2048@30 Hz, 2800 × 2100@30 Hz, 3072 × 2304@30 Hz, 840 × 2160@30 Hz, 4088 × 4088@15 Hz		
HDMI Input Board (DS-C10S-HI/4, DS-C10S-HI/2, DS-C10S-HI/E)	Input	4/2 × HDMI interface		
	DVI resolution	DS-C10S-HI/4, DS-C10S-HI/2: 720p@50 Hz, 720p@60 Hz, 1024 × 768@60 Hz, 1024 × 768@75 Hz, 1280 × 1024@60 Hz, 1280 × 1024@75 Hz, 1366 × 768@60 Hz, 1400 × 1050@60 Hz, 1080p@50 Hz, 1080p@60 Hz, UXGA@60 Hz, 1920 × 1200@60 Hz. DS-C10S-HI/E: 1024 × 768@60 Hz, 1024 × 768@75 Hz, 1280 × 720@50 Hz, 1280 × 720@60 Hz, 1280 × 1024@60 Hz, 1280 × 1024@75 Hz, 1366 × 768@60 Hz, 1400 × 1050@60 Hz, 1600 × 1200@60 Hz, 1920 × 1080@50 Hz, 1920 × 1080@60 Hz, 1920 × 1200@60 Hz, 3840 × 2160@30 Hz (3840 × 2160@30 Hz is only supported by No. 1 and 3 interfaces.)		
SDI Input Board (DS-C10S-SDI/4)	Input	4 × SDI interface		
	SDI Digital Signal Input Resolution	720p@25 Hz, 720p@30 Hz, 720p@50 Hz, 720p@60 Hz, 1080p@25 Hz, 1080p@30 Hz, 1080i@50 Hz, 1080i@60 Hz		
YPbPr Input Board (DS-C10S-YI/2)	Input	2 × RCA interface		
	Resolution	480i@60 Hz, 480p@60 Hz, 576i@50 Hz, 576p@50 Hz, 720p@50 Hz, 720p@60 Hz, 1080i@50 Hz, 1080i@60 Hz		

HD TVI Input Board (DS-C10S-TVI/4)	Input	4 × HD TVI interface		
	Resolution	1280 × 720@25 Hz, 1280 × 720@30 Hz, 1280 × 720@50 Hz, 1280 × 720@60 Hz, 1920 × 1080@25 Hz, 1920 × 1080@30 Hz		
DP Input Board (DS-C10S-DPI/4)	Input	4 × DP interface		
	Resolution	1024 × 768@60 Hz, 1024 × 768@75 Hz, 1280 × 720@50 Hz, 1280 × 720@60 Hz, 1280 × 1024@60 Hz, 1280 × 1024@75 Hz, 1366 × 768@60 Hz, 1400 × 1050@60 Hz, 1600 × 1200@60 Hz, 1920 × 1080@50 Hz, 1920 × 1080@60 Hz, 1920 × 1200@60 Hz, 3840 × 2160@30 Hz (3840 × 2160@30 Hz is only supported by No. 1 and 3 interfaces.)		
HDBaseT Input Board (DS-C10S-HDBI/4)	Input	4 × HDBaseT interface		
	Resolution	1024 × 768@60 Hz, 1024 × 768@75 Hz, 1280 × 720@50 Hz, 1280 × 720@60 Hz, 1280 × 1024@60 Hz, 1280 × 1024@75 Hz, 1366 × 768@60 Hz, 1400 × 1050@60 Hz, 1600 × 1200@60 Hz, 1920 × 1080@50 Hz, 1920 × 1080@60 Hz, 1920 × 1200@60 Hz, 3840 × 2160@30 Hz (3840 × 2160@30 Hz is only supported by No. 1 and 3 interfaces.)		
VGA Output Board (DS-C10S-VO/4E, DS-C10S-VO/2E)	Output	4/2 × VGA interface		
	RGB Resolution	HD15 interface (DVI-HD15 adaptor is needed.) Resolution: 1024 × 768@60 Hz, 1024 × 768@75 Hz, 1366 × 768@60 Hz, 1080p@60 Hz, 1400×1050@60 Hz, 1920×1200@60 Hz, 720P@60 Hz		
DVI Output Board (DS-C10S-DO/4E, DS-C10S-DO/2E)	Output	4/2 × DVI interface		
	DVI Resolution	1024 × 768@60 Hz, 1024 × 768@75 Hz, 1366 × 768@60 Hz, 1080p@60 Hz, 1400 × 1050@60 Hz, 1920 × 1200@60 Hz, 720p@60 Hz		
HDMI Output Board (DS-C10S-HO/4E, DS-C10S-HO/2E)	Output	4/2 × HDMI interface		
	HDMI Resolution	1024 × 768@60 Hz, 1024 × 768@75 Hz, 1366 × 768@60 Hz, 1400 × 1050@60 Hz, 1920 × 1200@60 Hz, 720p@60 Hz, 1080p@60 Hz		
SDI Output Board (DS-C10S-SDO/4)	Output	4 × SDI interface		
	SDI Resolution	720p@50 Hz, 720p@60 Hz, 1080p@50 Hz, 1080p@60 Hz		
HDBaseT Output Board (DS-C10S-HDBO/4)	Output	4 × RJ45 interface		
	HDBaseT Resolution	1024 × 768@60 Hz, 1024 × 768@75 Hz, 1366 × 768@60 Hz, 1080p@60 Hz, 1400 × 1050@60 Hz, 1920 × 1200@60 Hz, 720p@60 Hz		
Others	Power Supply	100 to 240 VAC, 50/60Hz		
		A build-in power supply	Build-in redundant power supply	
	Consumption	≤ 250 W (full-loaded)	≤ 450 W (full-loaded)	≤ 1000 W (full-loaded)
	Working Temperature	+0° C to +50° C (+32° F to +122° F)		
	Working Humidity	10 to 90% (Non-condensing)		
Chassis	Standard 4U chassis	Standard 8U chassis	Standard 13U chassis	

	Dimension (D×H×W)	352 × 177 × 442.4 mm (13.9 × 7 × 17.4 inch)	352 × 354 × 442.4 mm (13.9 × 13.9 × 17.4 inch)	417 × 576.6 × 442.4mm (16.4 × 27.7 × 17.4 inch)
	Weight	≤ 20 kg (full-loaded)	≤ 35 kg (full-loaded)	≤ 50 kg (full-loaded)

Physical Interfaces

4U Chassis

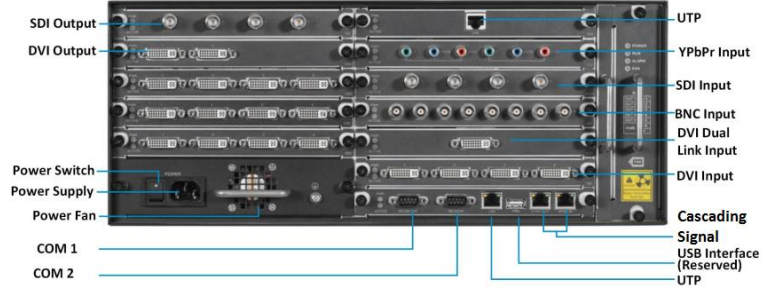


8U Chassis



Physical Interfaces

13U Chassis

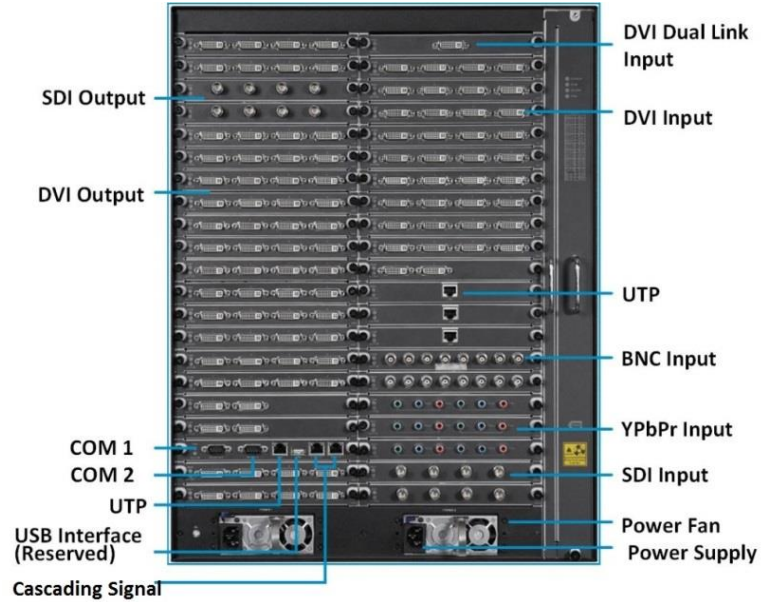

Available Models

DS-C10S-S11/E, DS-C10S-S22/E, DS-C10S-S41/E

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com