





Power Over Ethernet



# 24RPE

BUILT TO RUN 24 X 7 X 365 CONTINUOUSLY

## OVERVIEW

The ORION Images PoE is a technology that lets network cables carry electrical power and delivery is intelligent, and designed to protect network equipment from overload, underpowering.

Full HD 22" to 24" PoE CCTV monitors are design for run 24 / 7 / 365 operating.

It support HDMI digital input to display high quality 1080p image. Also analog BNC and VGA input display. superior image quality with up to 250 nits brightness.

## FEATURES

- ▶ 24" Available Screen Size
- ▶ 1920 x 1080 Full HD Resolution, 250 Nits, 1000:1 Contrast Ratio
- ▶ Video Signal : BNC / HDMI / VGA
- ▶ RJ45 PoE Input Power
- ▶ OSD Control
- ▶ 16:9 Aspect Ratio
- ▶ LED Backlight Unit




### SPECIFICATIONS

24RPE	
<b>Display</b>	
Screen Size	23.8 Inch
Active Display Area	527.04mm(W)×296.46mm(H)
Resolution	1920×1080
Brightness	250cd/m <sup>2</sup>
Contrast Ratio	1000 : 1
Aspect Ratio	16 : 9
Viewing Angle (H/V)	178° / 178°
Display Color	16.7M
Response Time	5ms
Pixel Pitch(mm)	0.275(H)×0.275(V)
<b>Interface</b>	
BNC input/output	2/1(CVBS)
HDMI input	1
VGA input	1
RJ45 PoE input	1(IEEE802.3at, 10/100/1000MB)
RJ45 PoE output (optional)	1(loop network, 10/100/1000MB)
DP input	N/A
USB	for F/W update only
AUDIO in/put	1/1
<b>OSD display</b>	
OSD control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
Language	English
<b>POWER</b>	
Power input	DC12V 3A. or POE Input AT Standard
Max in operation	≤35W (Max)
Standby power loss	<1W
Operating temperature	-20~60℃
<b>Mounts</b>	
VESA™ Mount Size	Stand mount, VESA mount
Mount Method	100 x 100mm

\*Design and specifications are subject to change without notice

### INPUT INTERFACE

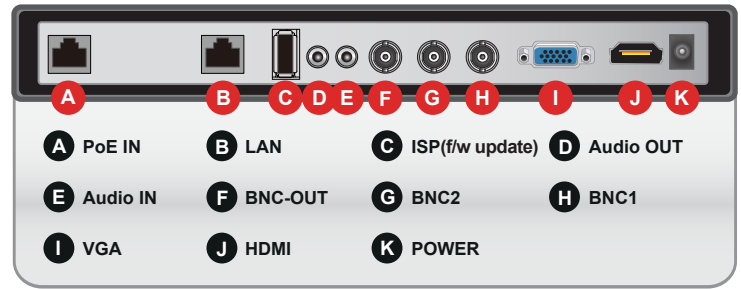

### OPTIONAL MOUNTS



### DIMENSIONS

