

# 18/6 RISER RATED, SHIELDED SECURITY & CONTROL CABLE




## 18 AWG 6 Stranded Conductors, Shielded

Ratings CMR, CL3R, FT4  
Approvals ETL Listed

### Construction

Conductor 18 AWG 19 Strand Bare Copper  
Conductor Count 6  
Insulation PVC (0.011" nom.)  
Insulation Colors Black, Red, White, Green, Brown, Blue  
Lay Length 3.60" nom.  
Shielding Aluminum Foil/Mylar w/  
24 AWG Tinned-Copper Drain  
Rip Cord Yes  
Jacket PVC (0.016" nom.)  
Overall Diameter 0.214" nom.

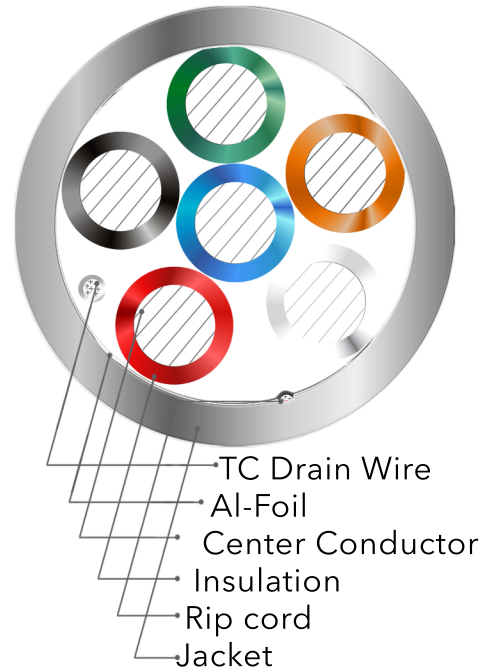

Print Legend ADI PRO P/N RN-XXXXXXX OXYGEN  
FREE 6C18 SHIELDED 3180662 C(ETL)US CL3R 75C,  
CMR FT4 RoHS LOT#XXXX MMDDYY XXXXFT

### Properties

Operating Voltage 300 Volts max.  
DC Resistance 6.66 Ohms/1000' at 20°C  
Capacitance 22.7 pF/ft. nom.  
Temperature -20°C to 75°C  
Flame Rating UL 1666 (Riser);  
CSA C22.2 No. 2556 (FT4)  
RoHS Compliant Yes  
Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-80SR509	GREY	500FT	EXPRESS BOX



For more information contact your ADI Sales person or visit [adiglobal.com/adiexclusivebrands](http://adiglobal.com/adiexclusivebrands)