




Front view

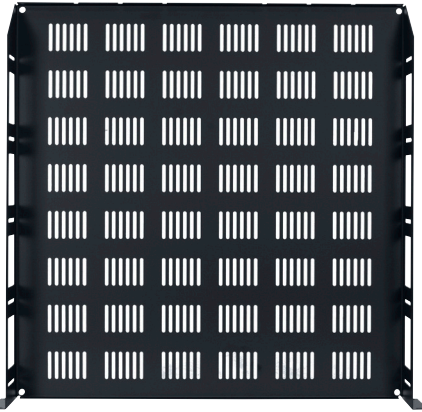


Top view

FEATURES

- **Panel Space:** 2U
- **Overall Depth:** 18.00" [457]
- **Overall Width:** 19.00" [483]
- **Usable Width:** 17.56" [446]
- **Description:** Rugged steel shelf mounts to 19" E.I.A. compliant rack, providing support for non-rackmount equipment such as consumer electronics, power supplies, and chassis style components.
- **Construction:** 16-gauge certified U.S. steel
- **Finish:** Smooth black powder epoxy finish
- **Base:** Fully vented base for passive ventilation
- **Front:** Front flange (0.38") adds strength and helps keep equipment in place.
- **Rear:** Slotted rear flange (0.56") provides tie-off points for cable management and notches to mount an optional 12" power strip.
- **Load Capacity:** 50 lbs.
- **Compliance:** E.I.A./T.I.A.
- **Origin:** Made in the U.S.A.
- **Options:** (order separately)
 - **ACS-1506-WW:** Compact 12" AC power strip with six 15A NEMA outlets, spaced for power supplies, and 6 ft. attached cord.
 - **ACS-1507:** Compact 12" AC power strip with seven 15A NEMA outlets and 6 ft. detachable cord.

A&E SPECIFICATIONS

The rackmount utility shelf shall be Lowell model USV-218 with overall dimensions of 19"W x 18"D x 2U. It shall be 16-gauge certified U.S. steel construction with fully vented base and smooth black powder epoxy finish. It shall feature a front and rear flange. The rear flange shall have slots to provide tie-off points for cable management, and notches to mount an optional 12" power strip. The shelf shall be made in the U.S.A. and have a load capacity of 50 lbs.

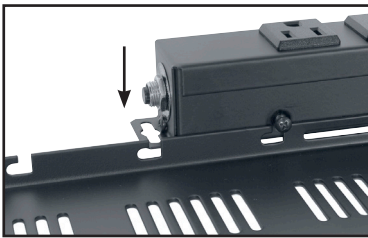

Notches on the shelf's rear flange make it easy to mount optional 12" power strip.

SERIES SUMMARY

Model No.	Panel Space	Overall Width	Useable Width	Overall Depth	Overall Height	Load Capacity	Material	Carton Pack
USV-110	1 U	19.00 [483]	17.56 [446]	10.75 [273]	1.72 [44]	50 lbs. [23 kg]	16-ga. steel	1
USV-214	2 U	19.00 [483]	17.56 [446]	14.00 [356]	3.47 [88]	50 lbs. [23 kg]	16-ga. steel	1
USV-314	3 U	19.00 [483]	17.56 [446]	14.00 [356]	5.22 [133]	50 lbs. [23 kg]	16-ga. steel	1
USV-414	4 U	19.00 [483]	17.56 [446]	14.00 [356]	6.97 [177]	50 lbs. [23 kg]	16-ga. steel	1
USV-218	2U	19.00 [483]	17.56 [446]	18.00 [457]	3.47 [88]	50 lbs. [23 kg]	16-ga. steel	1

Dimensions = inches [mm]; 1U = 1.75"



TECHNICAL DRAWINGS

Dimensions are inches and [mm] unless stated otherwise.

