



REV	DESCRIPTION OF CHANGE	DATE

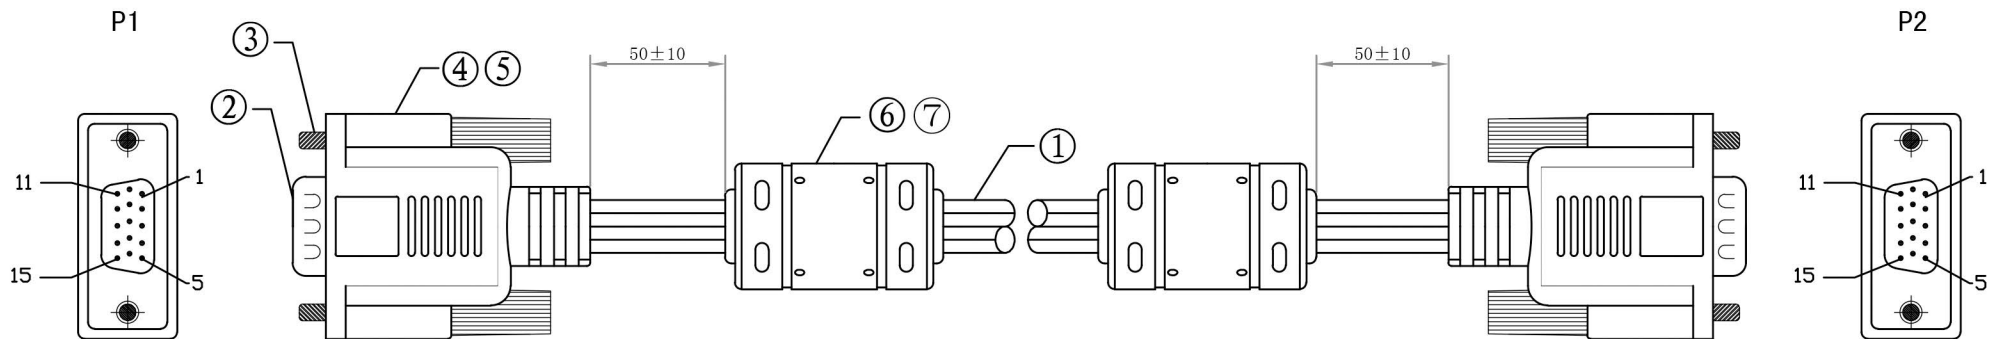

PIN OUT

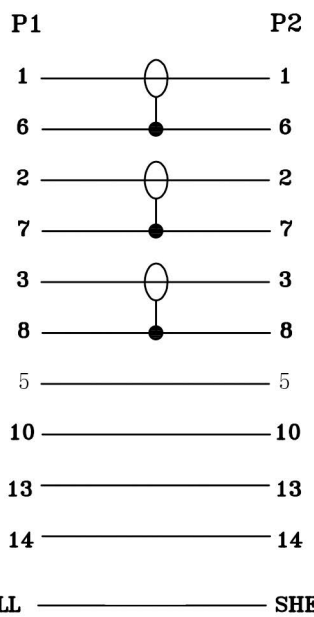

ELECTRICAL TEST:
 <1>.100% OPEN SHORT & MISS WIRE TEST.
 <2>.INSULATION RESISTANCE:DC 300V 5Mohm MIN.
 CONDUCTOR RESISTANCE: 5 ohm MAX.
 <3>.All materials must meet the RoHS standard.

⑦	OUTER MOLDED	ID11. 5*OD17. 4*L28. 5MM	2PCS	
⑥	OUTER MOLDED	45P BLACK PVC		
⑤	OUTER MOLDED	45P BLUE PVC		
④	INNER MOLDED	PE		
③	SCREW	Screw 2.3*37 #4-40	4PCS	
②	CONN	HD 15P Male Nickel PLATED	2PCS	
①	CABLE	[(7/0. 12BC*1C+20/0. 12CCA) *3C+7/0. 10BC*4C +AL+7/0. 12BC+96#/0. 12ALB] *1C OD=φ8.0mm UL CL2 Black Cable		
NO.	SPECIFICATION STANDARD		QTY	REMARK

SCALE	1:1
UNIT	mm



Description: HD15 MALE/MALE SVGA CABLE	DESIGN	Song	CHECKED	APPROVED
DWG NO		REV	A1	DATE
				2016.06.17