



REV	DESCRIPTION OF CHANGE	DATE

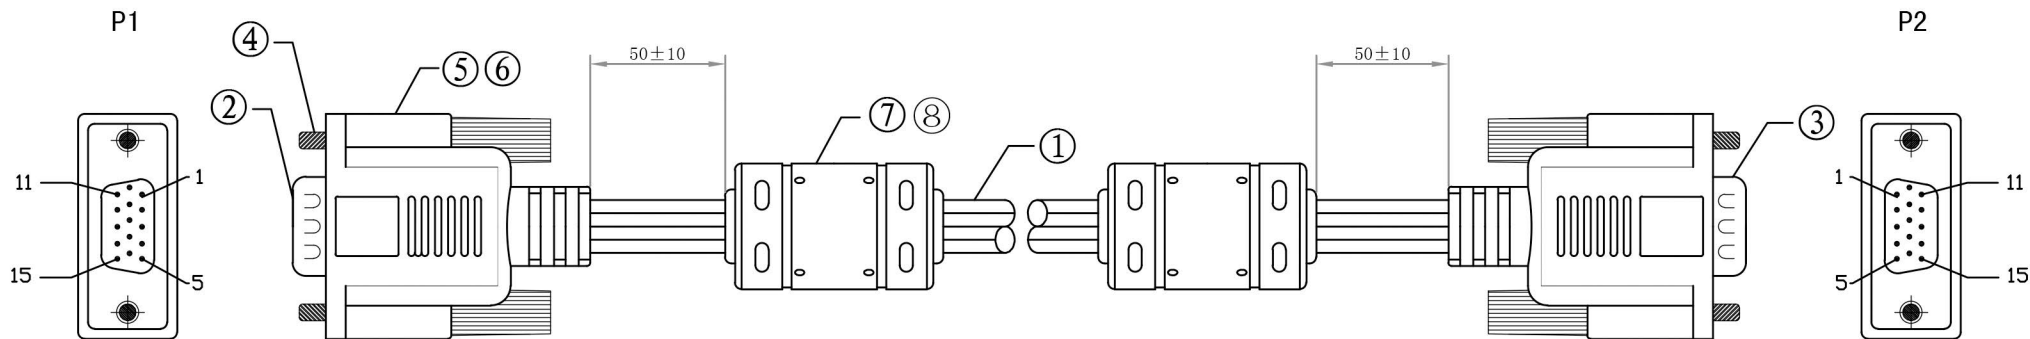

**PIN OUT**

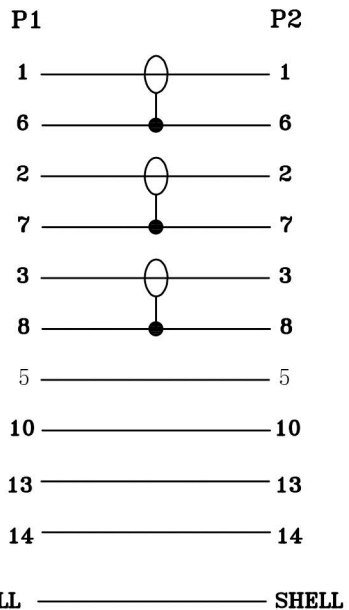

**ELECTRICAL TEST:**

- <1>.100% OPEN SHORT & MISS WIRE TEST.
- <2>.INSULATION RESISTANCE:DC 300V 5Mohm MIN.  
CONDUCTOR RESISTANCE: 5 ohm MAX.
- <3>.All materials must meet the RoHS standard.

⑧	FERRITE	ID11.5*OD17.4*L28.5MM	2PCS	
⑦	OUTER MOLDED	45P BLACK PVC		
⑥	OUTER MOLDED	45P BLUE PVC		
⑤	INNER MOLDED	PE		
④	SCREW	Screw 2.3*37 #4-40	4PCS	
③	CONN	HD 15P Female Nickel PLATED	1PCS	
②	CONN	HD 15P Male Nickel PLATED	1PCS	
①	CABLE	[(7/0.12BC*1C+20/0.12CCA)*3C+7/0.10BC*4C +AL+7/0.12BC+96#/0.12ALB]*1C OD=φ8.0mm UL CL2 Black Cable		
NO.	SPECIFICATION STANDARD		QTY	REMARK

SCALE	1:1
UNIT	mm



Description:  
HD15 MALE/FEMALE  
SVGA CABLE

DESIGN	Song	CHECKED	APPROVED
REV	A1	DATE	2016.06.17
			PAGE:1/1