


BOM LIST

No.	Material Name	SPEC	Unit	QTY	Remark
①	Cable	UL2725 1P*28#+2C*24#+AL+D+B Black Jacket 48AL OD:4.5 Printing:USB SHIELDED HIGH SPEED CABLE 2.0 REVISION 28AWG/1P+24AWG/2C(1") E318233 AWM 2725 80°C 30V			
②	Connector	USB 2.0 MALE WHITE INNER, Iron shell plated nickel RoHS	pcs	1	
③	Connector	USB 2.0 FEMALE WHITE INNER, Iron shell plated nickel RoHS	pcs	1	
④	Tin line	Lead-free green tin line OD0.8 1000G RoHS	g	0.14	
⑤	Tube	Black tube OD0.8 RoHS	m	0.008	1*8mm
⑥	Inner mold	LD-PE 950 RoHS	kg	0.002	
⑦	Outer mold	Black PVC A813 45P RoHS	kg	0.014	
⑧	Tie	Black wire RoHS			
⑨	PE bag	Size:220*180*0.1MM RoHS	pcs	1	
⑩	PE bag-Label	Size:70*40mm RoHS	pcs	1	
⑪	PE bag	Size:05*30*30fc(0.005*76.2*76.2CM) RoHS			
⑫	Outer carton	K=K 46*30*30CM RoHS			
Mold detail:USB:A"M:A-1383 USB"A"F:A-1293 B-1199					
Test parameters: insulation resistance:5MΩ conduction impedance: 5MΩ					
Note:					

PIN OUT:

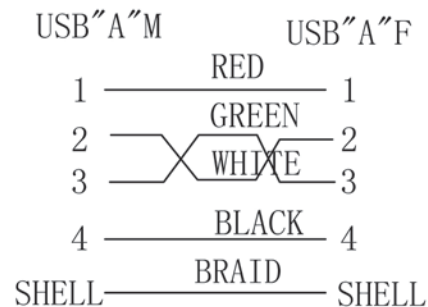

weltron®

	SCALE NO.	UNIT MM.	Ver A/2	Part No: 90-USB-AAEX-XX
CUS ET267	Item USB"A"M/"A"F			Description: A Male To A Female USB Extension Cable
Drawing No. DISET2671708014	Date 2017-8-22			