


WIRE & CABLE


wire & cable
wire accessories



WIRE & CABLE LINE CARD

- (9N) Arlington
- (5B) Belden 
- (GM) GEM Electronics
- (GI) GRI
- (HK) Hitachi
- (WG) Honeywell Cabling Products
- (5I) ICM Corp.
- (6L) Lake Cable
- (JQ) Optical Cable Corp.
- (P8) Premiere Raceway
- (RM) Remeo
- (R5) SR Components
- (UY) Superior Essex
- (WP) West Penn

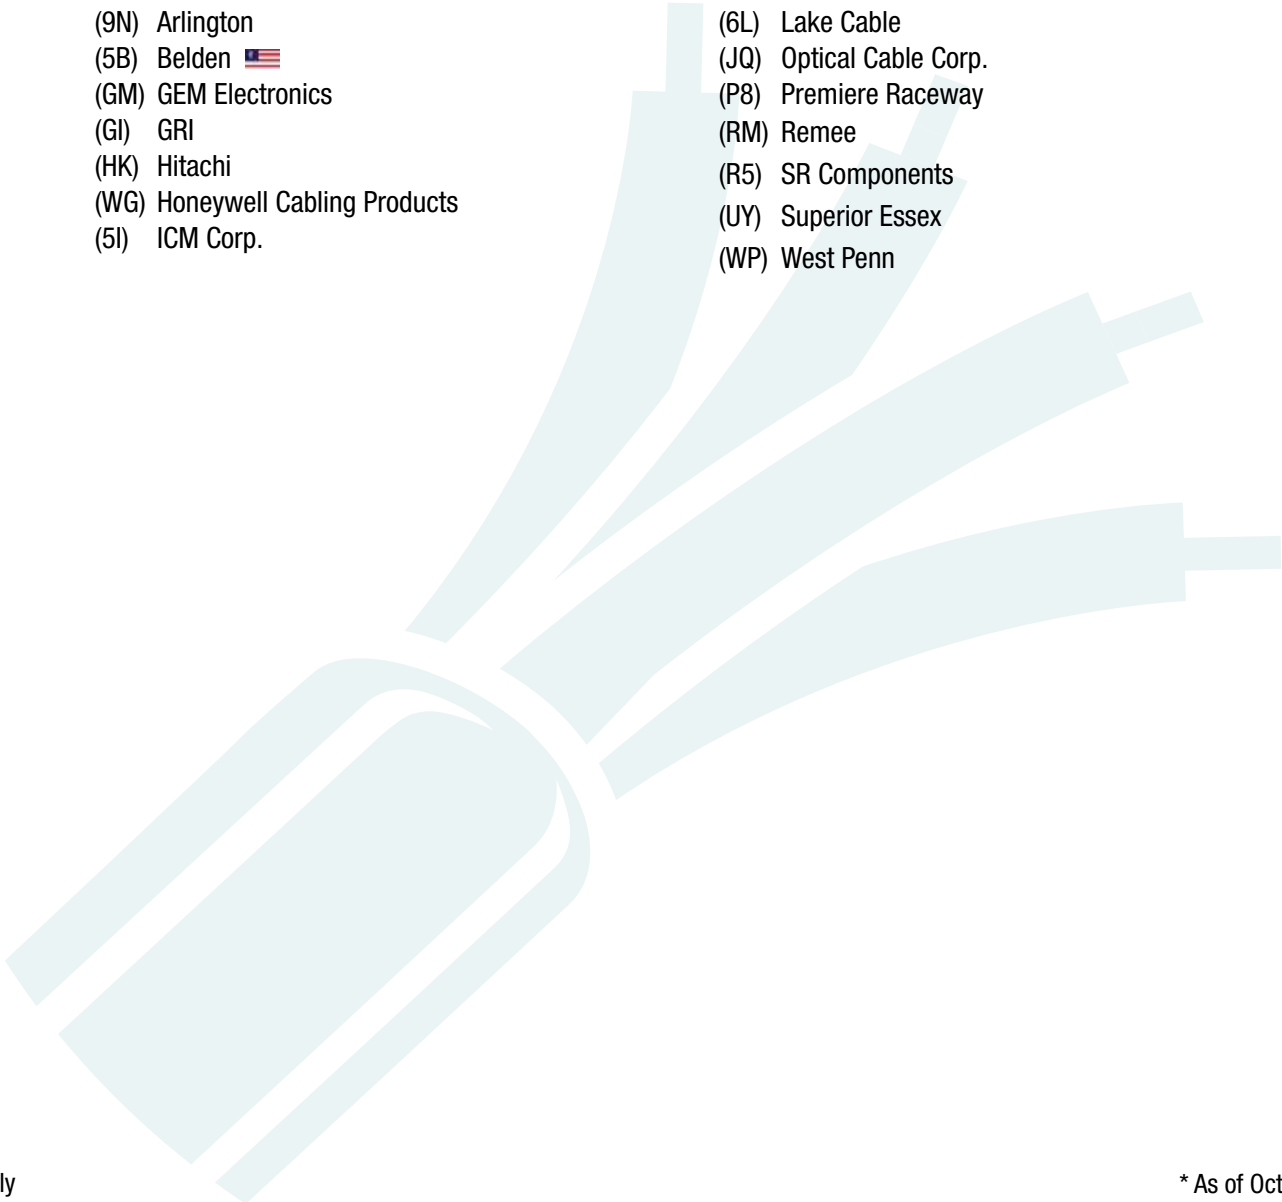

 U.S. Only


* As of October 2012

1.800.233.6261
www.adiglobal.com/us

1.877.234.7378
www.adiglobal.com/ca

Cable Substitution Hierarchy

Plenum

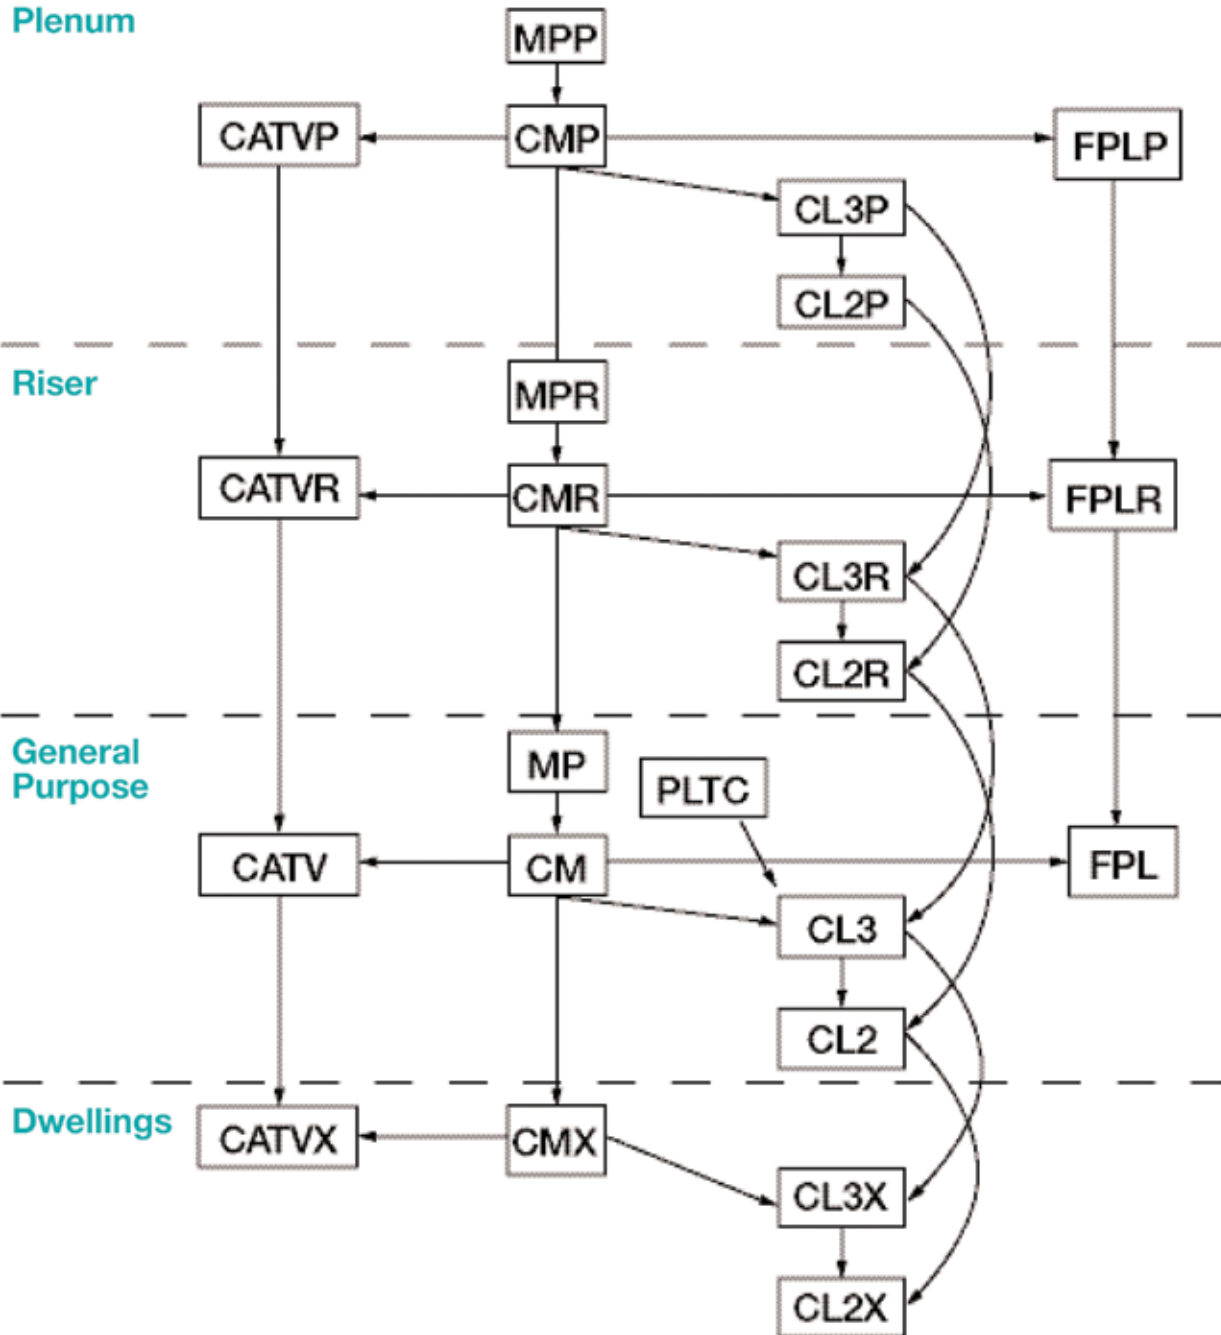

Type CM Communications Wires and Cables

Type CL2 and CL3 Class 2 and Class 3 Remote-Control, Signaling, and Power-Limited Cables

Type FPL Power Limited Fire Alarm Cables

Type MP Multipurpose Cables

Type PLTC Power-Limited Tray Cable

Type CATV Community Antenna Television Cable

Cable 101 Training




Strengthen your knowledge of Honeywell's Genesis Series Cables.


Learn about the anatomy, application, testing, and ratings of the major cables available at ADI. This course will empower you to make the right decision when selecting and using Genesis Series cable, the foundation for quality installations!

- Don't get caught up in a technicality. Learn cable ratings and listings to always select the right cable.
- What makes good speaker cable? Understand how the construction, run length and materials used to create these cables are beneficial to your installation.
- Learn about Honeywell Cable's exclusive WaveFLEX™ jacket design that increases cable flexibility and simplifies tripping and termination.
- Understand how to reduce cost and installation time with Profusion™ Access Control Cables.
- Coax and Category highlights. Get specifics on these types of cables, their benefits and tips on determining the right cable for the job.
- We've got a cable for that! Have at your fingertips the right cable for each installation for a variety of applications.


To access this training, please visit www.honeywellcable.com/resources/training.

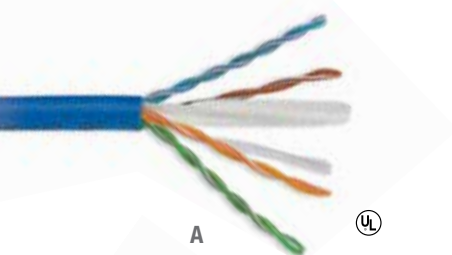

A

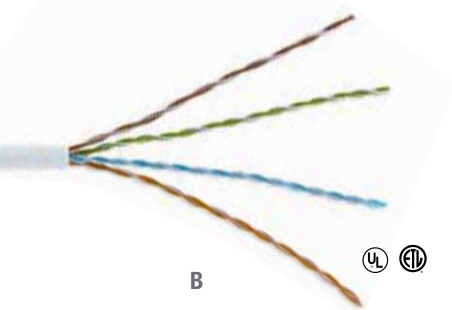

B

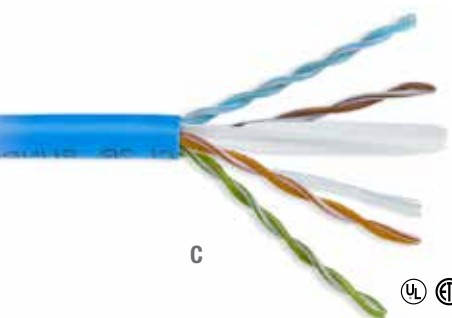

C



D



Honeywell

A. Category 6 Plus Plenum Rated

- Catlink 6 Plus exceeds TIA/EIA-568-B.2-1 requirements for Category 6 and is tested to 500 MHz
- Includes center “spline” for improved cross-talk performance
- Available colors include: Blue, White, Yellow, and Green. Consult factory for additional colors.

WG-51022101 (51022101)

- 23/4PR CMP/FT6 1000 ft. RL/BX White

WG-51022106 (51022106)

- 23/4PR CMP/FT6 1000 ft. RL/BX Blue

B. Cat 6 Splineless

- Cat 6 “Splineless” exceeds TIA/EIA-568-B.2-1 requirements for Category 6 and is tested to 350 MHz
- Engineered without a center spline for reduced overall diameter permitting more cables per conduit

WG-63602101 (63602101)

- 23/4 CMR/FT4 1000 ft. RL/BX White

WG-63602106 (63602106)

- 23/4 CMR/FT4 1000 ft. RL/BX Blue

WG-63612101 (63612101)

- 23/4 CMP/FT6 1000 ft. RL/BX White

WG-63612106 (63612106)

- 23/4 CMP/FT6 1000 ft. RL/BX Blue



WG-63612108 (63612108)

- 23/4 CMP/FT6 1000 ft. RL/BX Black

C. Category 6 Plus Riser Rated

WG-50922101 (50922101)

- 23/4 CMR/FT4 1000 ft. RL/BX White

WG-50922106 (50922106)

- 23/4 CMR/FT4 1000 ft. RL/BX Blue

D. Cat 5e Cable, Riser Rated

WG-50781106 (50781106)

- 24/4 350 MHz CMR/FT4 1000 ft. Box Blue

WG-50782101 (50782101)

- 24/4 350 MHz CMR/FT4 1000 ft. RIB White

WG-50782106 (50782106)

- 24/4 350 MHz CMR/FT4 1000 ft. RIB Blue

WG-50781101 (50781101)

- 24/4 350 MHz CMR/FT4 1000 ft. Box White

Category 5e, Plenum Rated

WG-50881101 (50881101)

- 24/4 200 MHz CMP/FT6 1000 ft. Box White

WG-50881106 (50881106)

- 24/4 200 MHz CMP/FT6 1000 ft. Box Blue



Water Resistant Cat 5e

- 24/4 Pair Cat 5e for underground use
- Category 5e Unshielded Twisted Pair (UTP) structured premise cable for voice and data
- Overall black polyethylene jacket with moisture absorbent tape designed to be installed in conduit pipe or tubing

WG-50905008 (50905008)

WG-50901008 (50901008)

Honeywell

A. Security - Jacketed OAS, Gen Purpose Rated

- WG-12061109 (12061109)
 - 22/6 STR OAS 1M BX GRY
- WG-12065509 (12065509)
 - 22/6 STR OAS 5C BX GRY
- WG-12145509 (12145509)
 - 18/2 STR OAS 5C BX GRY
- WG-12165509 (12165509)
 - 18/6 STR OAS 5C BX GRY

Security - Jacketed OAS, Plenum Rated

- WG-32065512 (32065512)
 - 22/6 STR OAS CL2P5C BX BGE



Multi-Conductor Cable - Overall Shielded

- WG-12041109 (12041109)
 - 22/4 STR OAS IM BX GRY
- WG-12141109 (12141109)
 - 18/2 STR OAS 1M BX GRY
- WG-32041112 (32041112)
 - 22/4 STR OAS CL2P 1M BX BGE
- WG-32141112 (32141112)
 - 18/2 STR OAS CL2P 1M BX BGE

B. Security - Jacketed, Unshielded, Plenum Rated

- WG-31041112 (31041112)
 - 22/4 STR JKT CL2P 1M BX BGE
- WG-31045512 (31045512)
 - 22/4 STR JKT CL2P 5C BX BGE
- WG-31145512 (31145512)
 - 18/2 STR JKT CL2P 5C BX BGE


C. Profusion™ Access Control Cable

- Wire for door strike, card reader, door contact & REX
- Individual cables effortlessly detach, unlike other jacket-less bundled constructions
- Eliminates cold weather cracking problems
- WG-12985099 (12985099)
 - Non-plenum
- WG-32955099 (32955099)
 - Plenum




D. Control Cables for Lutron


Part Number	Construction	Style	Shield	Listing	Jacket
WG-1214 (1214)	18/2 STR 16/30 BC	HomeWorks Dimmer & Switch	Aluminum Mylar TC Drain	CM	Gray
WG-1215 (1215)	18/4 STR 16/30 BC	HomeWorks Dimmer & Switch	Aluminum Mylar TC Drain	CM	Gray
WG-1202 (1202)	22/2 STR 7/30 BC	Vareo Dimmer & Switch	Aluminum Mylar TC Drain	CM	Gray
WG-1244 (1244)	22/1pr Low Cap Data 18/2 Power	Keypad Data/Grafik Eye 3000	22/1pr Aluminum Mylar TC Drain	CM	Blue/Yel Stripe
WG-1260 (1260)	22/1pr Low Cap Data 12/2 Power 18/1 Ground	Grafik Eye 4000/6000	22/1pr Aluminum Mylar TC Drain	CM	Blue
WG-3214 (3214)	18/2 STR 16/30 BC	HomeWorks Dimmer & Switch	Aluminum Mylar TC Drain	CMP	White
WG-3216 (3216)	18/4 STR 16/30 BC	HomeWorks Dimmer & Switch	Aluminum Mylar TC Drain	CMP	White
WG-3202 (3202)	22/2 STR 7/30 BC	Vareo Dimmer & Switch	Aluminum Mylar TC Drain	CMP	White

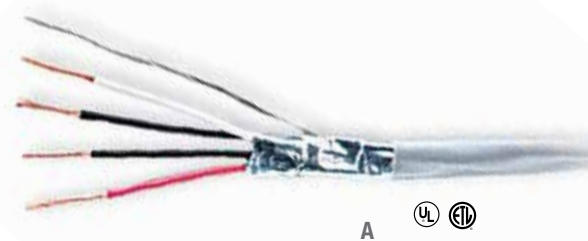

A  

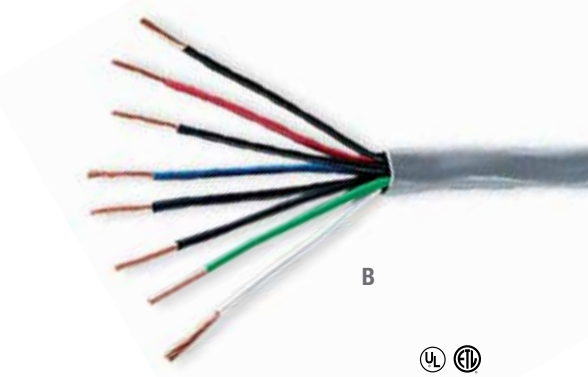

B  

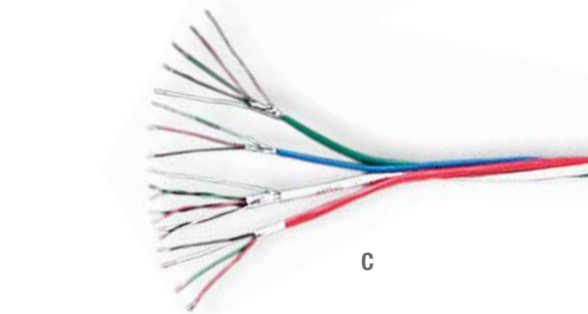

C



D 

select the best



Whatever your application, we've got a cable for that.

Now more than ever you need to meet critical performance requirements while keeping costs under control.

Honeywell offers a full breadth of cables engineered for your specific applications, from residential intrusion to commercial networking, and all backed by the industry's only 3-for-1 performance guarantee.

Wherever you need performance, reliability and service, we've got a cable for that!

Honeywell

Honeywell

A Security - Multi-Conductor Cable - Unshielded Gen Purpose Rated



- WG-11015801 (11015801)
 - 22/2 SOL CM/CL2 5C SB WHT
- WG-11021101 (11021101)
 - 22/2 STR JKT 1M BX WHT
- WG-11025801 (11025801)
 - 22/2 STR JKT CM/CL2 5C SB WHT
- WG-11031101 (11031101)
 - 22/4 SOL JKT 1M BX WHT
- WG-11035501 (11035501)
 - 22/4 SOL JKT 5C BX WHT
- WG-11035801 (11035801)
 - 22/4 SOL JKT CM/CL2 5C SB WHT
- WG-11035802 (11035802)
 - 22/4 SOL JKT CM/CL2 5C SB YEL
- WG-11035803 (11035803)
 - 22/4 SOL JKT CM/CL2 5C SB ORG
- WG-11035805 (11035805)
 - 22/4 SOL JKT CM/CL2 5C SB GRN
- WG-11035807 (11035807)
 - 22/4 SOL JKT CM/CL2 5C SB BRN
- WG-11035809 (11035809)
 - 22/4 SOL JKT CM/CL2 5C SB GRY
- WG-11041101 (11041101)
 - 22/4 STR JKT 1M BX WHT
- WG-11045501 (11045501)
 - 22/4 STR JKT 5C BX WHT
- WG-11045801 (11045801)
 - 22/4 STR JKT CM/CL2 5C SB WHT
- WG-11181101 (11181101)
 - 18/2 STR JKT 1M BX WHT
- WG-11181109 (11181109)
 - 18/2 STR JKT 1M BX GRY
- WG-11185501 (11185501)
 - 18/2 STR JKT 5C BX WHT
- WG-11185509 (11185509)
 - 18/2 STR JKT 5C BX GRY
- WG-11191109 (11191109)
 - 18/4 STR JKT 1M BX GRY
- WG-11195501 (11195501)
 - 18/4 STR JKT 5C BX WHT
- WG-11195509 (11195509)
 - 18/4 STR JKT 5C BX GRY

B. Control Cables for Crestron Systems

- WG-5088 (5088)
 - 24/4pr Cat5e 200 MHz CMP

C. Category 5e CM (Image not shown)

- CM Listed for general purpose use
- Requirements for Cat 5e and is tested to 350MHz
- WG-63301101 (63301101)
 - 24/4PR Cat 5e CM 1M Box White
- WG-63301106 (63301106)
 - 24/4PR Cat 5e CM 1M Box Blue
- WG-63301109 (63301109)
 - 24/4PR Cat 5e CM 1M Box Grey

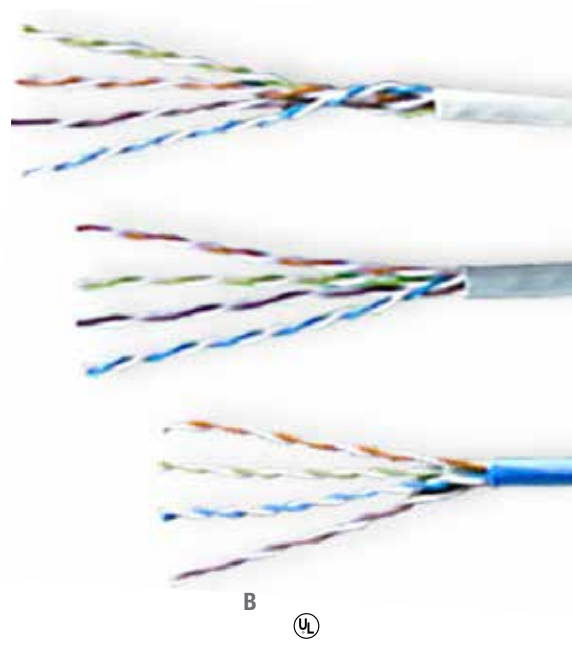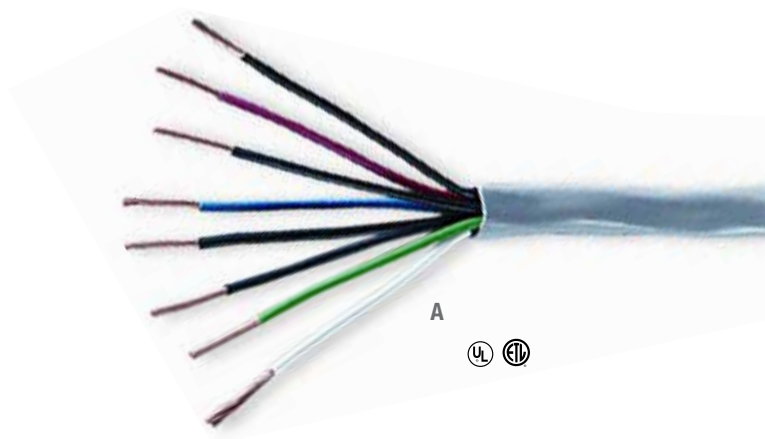



Honeywell

A. Fire Alarm Jacketed Unshielded, Gen Purpose Rated

WG-41015804 (41015804)

- 22/4 SOL FPL 5C SPEED BAG RED

WG-41061104 (41061104)

- 18/2 SOL JKT FPL 1M BX RED

WG-41015504 (41015504)

- 22/4 SOL JKT FPL 5C BX RED

WG-41065504 (41065504)

- 18/2 SOL JKT FPL 5C BX RED

WG-41071104 (41071104)

- 18/4 SOL JKT FPL 1M BX RED

WG-41075504 (41075504)

- 18/4 SOL JKT FPL 5C BX RED

WG-41111104 (41111104)

- 16/2 SOL JKT FPL 1M BX RED

WG-41115504 (41115504)

- 16/2 SOL FPL 5C BX RED

Fire Alarm Jacketed Unshielded, Plenum

WG-45061104 (45061104)

- 18/2 SOL JKT FPLP 1M BX RED

WG-45065504 (45065504)

- 18/2 SOL JKT FPLP 5C BX RED

WG-45071104 (45071104)

- 18/4 SOL JKT FPLP 1M BX RED

WG-45075504 (45075504)

- 18/4 SOL JKT FPLP 5C BX RED

WG-45111004 (45111004)

- 16/2 SOL JKT FPLP 1M RL RED

WG-45111104 (45111104)

- 16/2 SOL JKT FPLP 1M BX RED

WG-45115504 (45115504)

- 16/2 SOL JKT FPLP 5C BX RED

WG-45131004 (45131004)

- 14/2 SOL JKT FPLP 1M RL RED

B. Audacious Sound Cable with WaveFLEX® Jacket

- Extra flexible ridged jacket

- Easier than ever to strip

- Less likely to nick conductors

- Oxygen-free copper

WG-54735501 (54735501)

- 16/2 65STR AUD CMR/CL3R/FT4 5C

WG-54735540 (54735540)

- 16/2 (65 STR) 5C BX LT.PUR

WG-54745501 (54745501)

- 16/4 65STR AUD CMR/CL3R/FT4 5C

WG-54745510 (54745510)

- 16/4 (65 STR) 5C BX DK.PUR

WG-54755501 (54755501)

- 14/2 105STR AUD CMR/CL3R/FT4

WG-54756101 (54756101)

- 14/2 105STR AUD CMR/CL3R/FT4

WG-54766101 (54766101)

- 14/4 105STR AUD CMR/CL3R/FT4



A



B

Honeywell

A. Home Theater Sound, Jacketed Unshielded

- WG-52505501 (52505501)
 - 16/2 STR JKT HTS 5C BX WHT
- WG-52505506 (52505506)
 - 16/2 STR JKT HTS 5C BX BLU
- WG-52515501 (52515501)
 - 16/4 STR JKT HTS 5C BX WHT
- WG-52515506 (52515506)
 - 16/4 STR JKT HTS 5C BX BLU
- WG-52525501 (52525501)
 - 14/2 STR JKT HTS 5C BX WHT



B. Mini-RGB & Component Video Cable

- 24AWG low loss solid BC center conductor
- 95% TC & 100% foil shield
- Tested to 1GHz
- WG-50195008 (50195008)
- WG-50295008 (50295008)
- WG-50985008 (50985008)
- WG-50995008 (50995008)

C. CCTV Coaxial Cable

- WG-50015501 (50015501)
 - RG59/U 20G COAX 95% WHT BX 5C with WaveFLEX Jacketing
- WG-50015508 (50015508)
 - RG59/U 20G COAX 95% BLK BX 5C with WaveFLEX Jacketing
- WG-50011108 (50011108)
 - RG59/U 20G COAX 95% BLK BX 1M






D. CCTV Coaxial Cable with 18/2 Power


- WG-50135001 (50135001)
 - RG59 SOL BC 95% BC SHLD W/18/2 500 ft. RL WHT
- WG-50135008 (50135008)
 - RG59 SOL BC 95% BC SHLD W/18/2 500 ft. RL BLK
- WG-65086101 (65086101)
 - RG59 SOL BC 95% CCA SHLD W/18/2 500 ft. RL/BX WHT
- WG-65086108 (65086108)
 - RG59 SOL BC 95% CCA SHLD W/18/2 500 ft. RL/BX BL
- WG-50131008 (50131008)
 - RG59 WITH 18/2 SIAM 1M RL BLK
- WG-53551012 (53551012)
 - RG59/U 95% 18/2 STR CMB CX PLNM



E. Satellite & Digital Coaxial Cable


- WG-50071101 (50071101)
 - RG 6 QUAD SHLD 1M BX WH with WaveFlex Jacketing
- WG-50075501 (50075501)
 - RG 6 QUAD SHLD 5C BX WH with WaveFlex Jacketing
- WG-50075508 (50075508)
 - RG 6 QUAD SHLD 5C BX BK with WaveFlex Jacketing
- WG-50035501 (50035501)
 - RG6/U 18G 60% SHLD 5C BX WH
- WG-50035508 (50035508)
 - RG6/U 18G 60% SHLD 5C 500FT BK

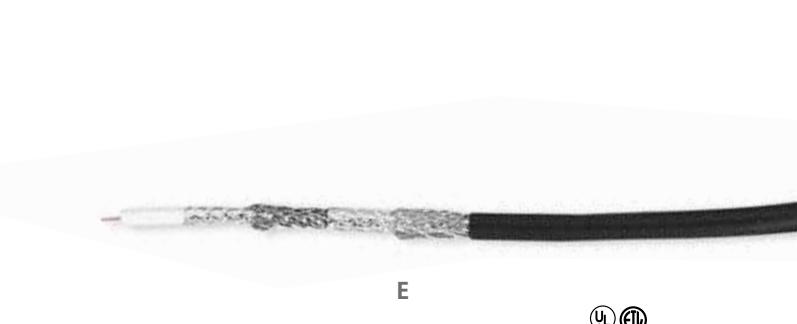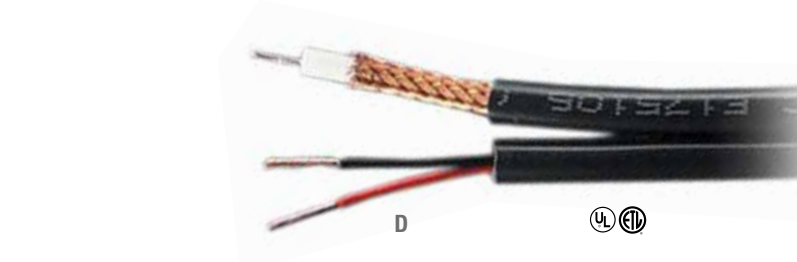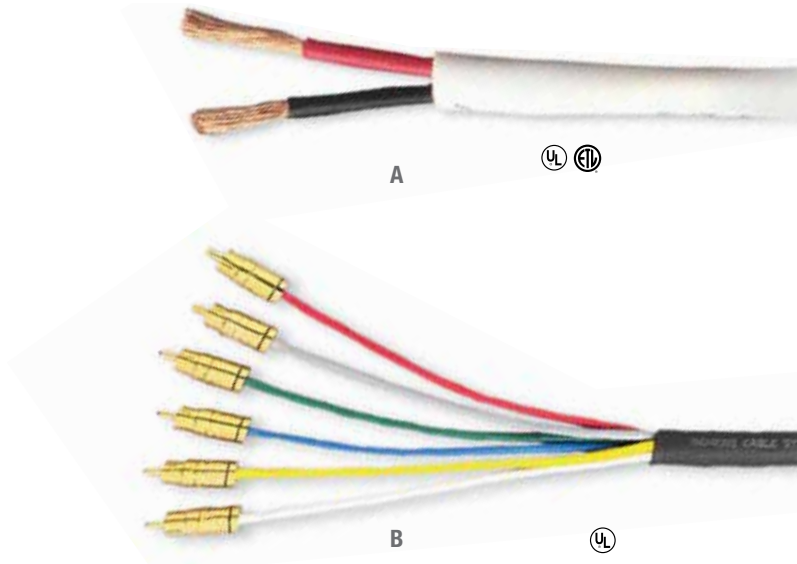

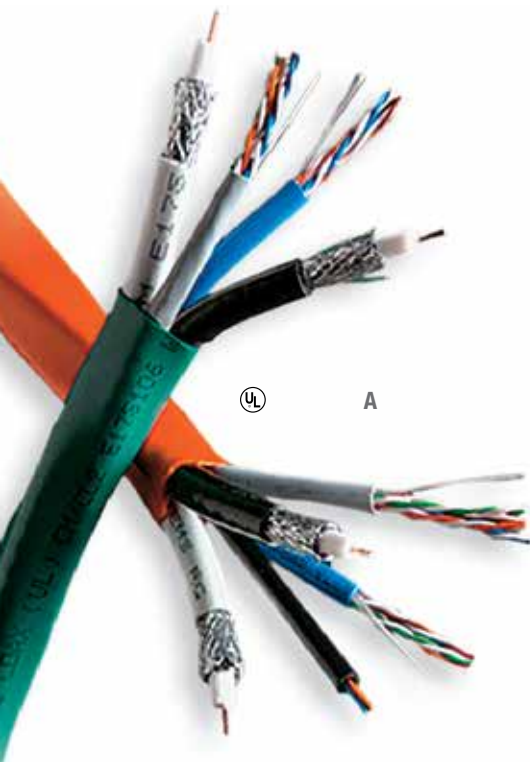

UL

A

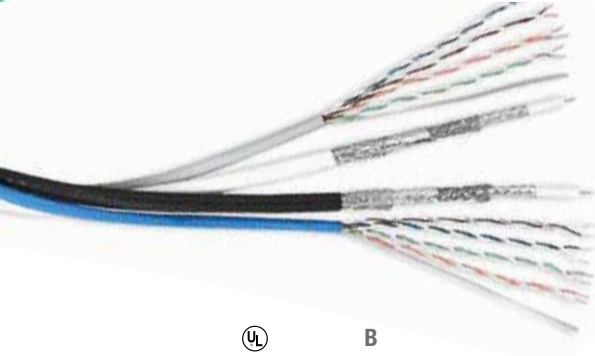

UL

B



D



E



UL

G

Honeywell

A. Jacketed Multimedia Cable

WG-5050 (5050)

- 2 x Cat5e + 2 x RG-6/U Quad Under One Jacket

WG-5066 (5066)

- Cat5e + RG-6/U Quad Siamese 3.0 GHz

B. Profusion Jacketless Multimedia Cable

- No degradation of individual cable performance
- Eliminates cold weather cracking problems of bonded cables
- Individual cables effortlessly detach, unlike other bonded cables
- 2 x Cat5e + 2 x RG-6/U Quad

WG-5060 (5060)

C. LL5 Fire Cable (Image not shown)

WG-55021104 (55021104)

- 16/1PR SOL LL5 1M RL RED

WG-55031004 (55031004)

- 16/2PR SOL LL5 1M RL RED

WG-55041004 (55041004)

- 14/1PR SOL LL5 1M RL RED

WG-55065004 (55065004)

- 14/2PR SOL LL5 5C RL RED

WG-55521004 (55521004)

- 16/1PR SOL OAS LL5 1M RL RED

WG-55541004 (55541004)

- 14/1PR SOL OAS LL5 1M RL RED

MG ELECTRONICS

D. 3' RG59 Cable Assembly

- With BNC twist on connectors on each end

MB-CBNC3 (CBNC-3)

E. 6' RG59 Cable Assembly

- With BNC twist on connectors on each end

MB-CBNC6 (CBNC-6)

F. 12' RG59 Cable Assembly (Image not shown)

- With BNC twist on connectors on each end

MB-CBNC12 (CBNC-12)



Reme
wire and cable


G. Plenum Siamese CCTV Coaxial Control Cable

- RG-59/U with braid and 18-2 str. B.C.
- For use in Closed Circuit Television applications
- White, 500 ft., Reel-in-Box
- Avail. in other lengths and colors as well as non-plenum

RM-725526L3W (725526L3W)



Remeee and ADI Partnered for Your Success

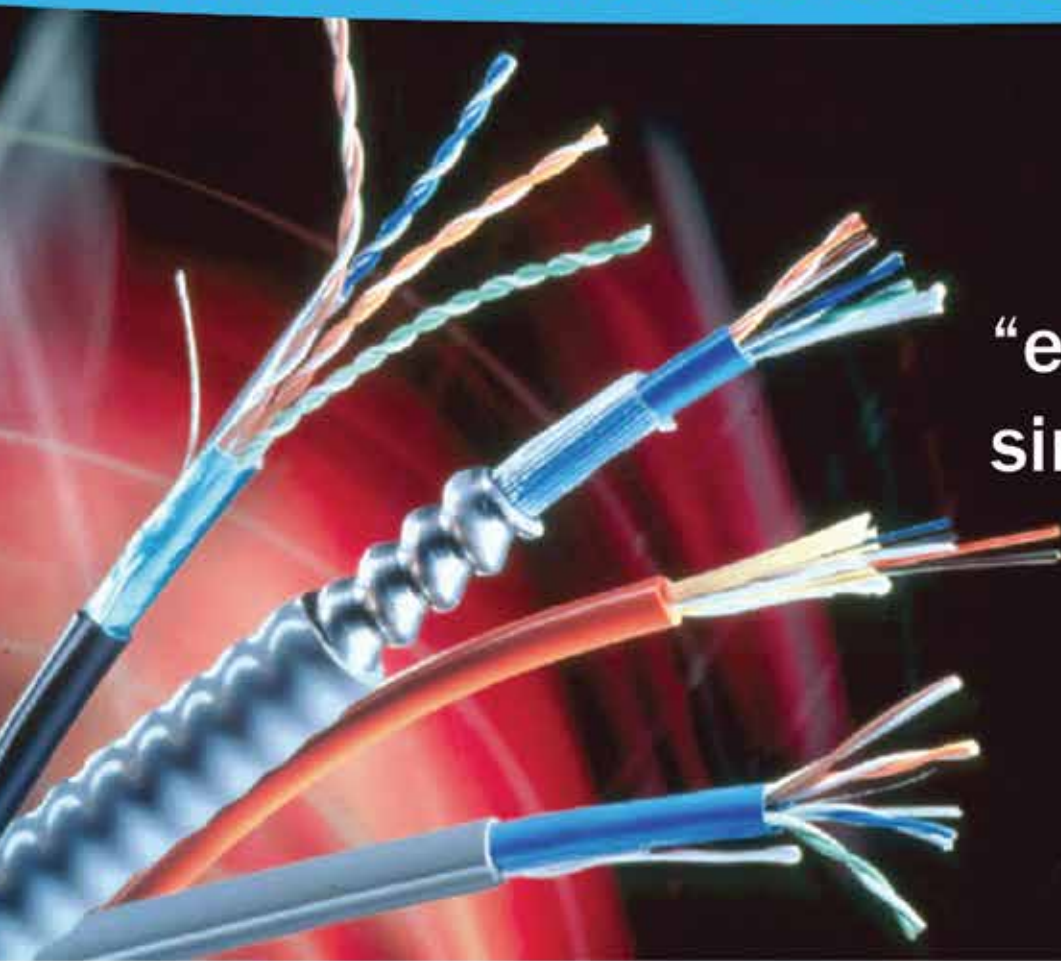

“end to end
simply the best”TM

Offering a Full Line

Fiber Optic Cable
Inside and Outside Plant
LAN, WAN & Premise
Composite Hybrid
Skipbound or Jacketed
Direct Burial
Low Voltage Electronic
Plenum High Temperature
Low Smoke Zero Halogen

Featuring

Made in the USA
ISO 9001 Accreditation
ETL Listed & Verified
QPL
MSHA
RUS, RoHS Compliant
*ADI “C” Core Products

** See a Full List of “C Core” Items in the Cable & Wire Section*

Remeee 25 Year ROSE Channel System Warranty

Remeee Open System Edge ProgramTM

You can select your cables with confidence knowing with Remeee connectivity is NEVER an issue. Remeee offers an extended 25-Year System Channel Warranty with our Category 5 and Category 6 products when installed with many of the connectivity leaders in the industry.

With our ROSE extended Warranty,
You are Protected Long After the Job is Complete!

Contact ADI for Full Warranty Details

Remeee
wire and cableTM

engineered with you in mind

Innovation
Commitment
Resources
History

ADI

Manufactured in the USA Since 1972

Remeee Products Florida, New York

Visit Remeee.com and Discover Our Quality, Service & Value Advantage



A



B



C



D



E



F

A. Voice/Data Cat 5e 100MHz Plenum Cable

- 4 pair 24AWG solid bare copper, unshielded twisted pair with a plenum jacket. For use in local area networks.
- Package: Pull box for easy installation; Length: 1000 ft.
- Avail. in other lengths and colors as well as non-plenum

RM-5BE244UTP (5BE244UTPM20)

RM-5BE244UTW (5BE244UTPM2W)

B. Voice/Data Cat 5e 350MHz Plenum

- 4 pair 24AWG solid bare copper, unshielded twisted pair w/Remgard plenum jacket. For LANs where air plenum return areas are used. 1000 ft. pull box for easy installs.

RM-5BE24435 (5BE244UTP/350M20)

- Blue

RM-5BE350M2W (5BE244UTP/350M2W)

- White

C. Data Cat 6 Plenum Tested to 550MHz

- 4 pair 23AWG solid bare copper, unshielded twisted pair with a plenum jacket; Used in gigabit Ethernet networks
- For use in local area networks, reel in box, length: 1000 ft.

RM-6BENHM30 (6B234UTPENHM30)

- Blue

RM-6BENHM3W (6B234UTPENHM3W)

- White

D. Data Cat 6 Plenum Tested to 250MHz

- 4 pair 23AWG solid bare copper, unshielded twisted pair with a Remgard plenum jacket
- Used in gigabit Ethernet networks, reel in box, 1000 ft.

RM-6B234M30 (6B234UTPM30)

- Blue

RM-6B234M3W (6B234UTPM3W)

- White

E. Data Cat 6 Tested to 550MHz No Spline

- 4 pair 23AWG solid bare copper, unshielded twisted pair w/ plenum jacket. For use in local area networks.
- Smaller diameter & easier to terminate, pull box, 1000 ft.

RM-6BNSM20 (6BNSM20)

- Blue

RM-6BNSM2W (6BNSM2W)

- White

F. Plenum Siamese CCTV Coaxial Control Cable

- RG-59/U with braid and 18-2 str. B.C.
- ETL Listed CMP
- Package: Reel
- Length: 1000 ft.

RM-725526M1W (725526M1W)





A. Voice/Data Cat 5e 350MHz Non-Plenum Cable

- 4pr 24AWG solid bare copper, unshielded twisted pair with non-plenum jacket. For use in local area networks.
- Length: 1000 ft.; Package: pull box for easy installation

RM-5AE244U20 (5AE244UTPRM20)

- Blue

RM-5AE244U2W (5AE244UTPRM2W)

- White

Voice/Data Cat 5e 350MHz Non-Plenum Cable

- 4pr 24AWG solid bare copper, unshielded twisted pair with non-plenum jacket. For use in local area networks.
- Length: 500 ft.; Package: pull box for easy installation

RM-5AE350L20 (5AE244UTPRL20)

- Blue

RM-5AE350L2W (5AE244UTPRL2W)

- White



A



B



C



B. Cat 6 Patch Cable

- Blue, 100% pure copper wire
- 24 AWG
- Molded with boots

R5-C6PCBL1 (C6PCBL1)

- 1 ft.

R5-C6PCBL3 (C6PCBL3)

- 3 ft.

R5-C6PCBL5 (C6PCBL5)

- 5 ft.

R5-C6PCBL7 (C6PCBL7)

- 7 ft.

C. Fiber Optic Patch Cable

- SC-SC multi-mode duplex
- 62.5 micron
- 1 meter

R5-FOPCCC1 (FOPCCC1)

D. Fiber Optic Patch Cable

- ST-ST multi-mode Duplex 1 Meter
- 62.5 Micron

R5-FOPCTT1 (FOPCTT1)



D



E

E. RG59 BNC Jumper Cables

- Black cable
- Gold connectors
- Individually poly-bagged

R5-603BNC

- 603BNC - 3 ft.

R5-606BNC

- 606BNC - 6 ft.



F. SVGA Cables

R5-C15M15MS** (C15M15MS**)

- SVGA cables with ferrite core

**= Length 6-6 ft., 10-10 ft., 15-15 ft., 5-50 ft., 7-75 ft.

R5-C15M15MS35** (C15M15MS35**)

- SVGA cables with audio

**= Length 6-6 ft., 10-10 ft., 15-15 ft., 5-50 ft., 7-75 ft.




F

Remee and ADI Partnered for Your Success

RemFo[®]

Fiber Optic Cable That
Makes Your Project a
Lot **Brighter**

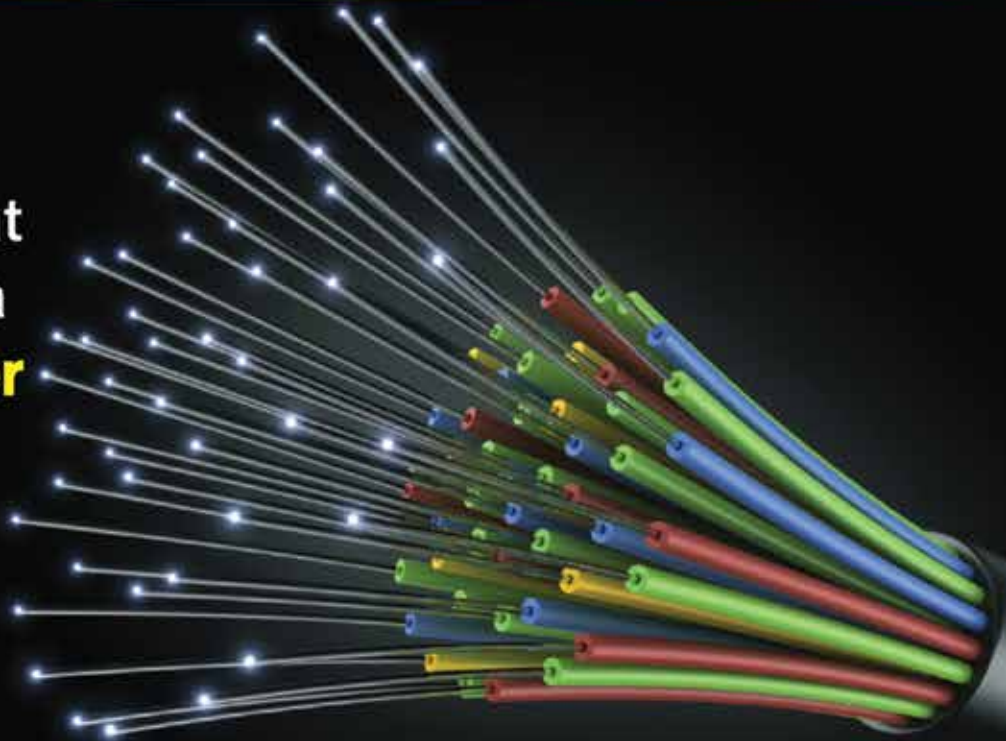

Remee Fiber Optic Cable:
ISO 9001 Accreditation
ETL Listed & Verified
QPL
MSHA
RUS, RoHS Compliant

Made in the USA Since 1972

“a cut above the rest”

Tight Buffer

- Indoor & Indoor/Outdoor Designs
- Riser & Plenum Rated Designs
- Tight Buffer Distribution & Breakout Constructions
- 900µm Buffer
- Aramid Yarns for Strength
- No Need for Breakout or Fan Out Kits to Terminate
- Outdoor Designs are Water Blocked
- Corrugated and Interlocking Armor Available
- Indoor/Outdoor Suitable for Installation in Conduit
- Armored Outside Plant Tight Buffer Cables for Direct Burial

Loose Tube

- Indoor/Outdoor & Outdoor Designs (OSP Outside Plant)
- Riser Rated Designs
- Gel Filled Loose Tube
- Requires Fan-Out Kit to Terminate
- SZ Stranded for Mid-Span Access & Protection
- Higher Fiber Counts in Relationship to Cable Diameter
- Ideal for Longer Pulls & Long Haul Applications
- Unarmored & Armored Constructions
- Self-Supporting Designs Available
- Low Smoke Zero Halogen Jacketing Available

Custom Cables *Designed for Specific Requirements*

- Available in Tight Buffer & Loose Tube
- Hybrid Designs with Multimode & Singlemode Fibers
- Unarmored & Armored Designs

Remee
wire and cable™

engineered with you in mind

Innovation
Commitment
Resources
History

ADI

Manufactured in the USA Since 1972

Remee Products Florida, New York

Visit Remee.com and Discover Our Quality, Service & Value Advantage

Arlington

A. Non-Metallic Bushing for Metal Studs

- Protects cable against damage and abrasion from sharp metal edges
- Bushings fit existing irregular-shaped holes in 2 x 4 metal studs – no need to punch hole and weaken the structural member
- Fits a standard 1" knockout

9N-SB13 (SB13)
9N-SB130 (SB130)

B. Cable Standoffs

- Positions non-metallic sheathed cable, phone/data cable, and coaxial cable on stud
- Installs with screw or nail

9N-CS4 (CS4)

- Positions for cables individually, nail included

9N-CS7 (CS7)

- Positions cable bundle

C. The Spacer™ Cable Spacer

- Holds power or low voltage cables individually, securely & centered on 2 x 4
- Holds a single or double row of up to eight (8) 14/2 cables securely

9N-CS14 (CS14)

- Non-metallic, nail-on cable spacer

9N-CS140 (CS140)

- Bulk pack, non-metallic nail-on cable spacer

9N-CS14SC (CS14SC)

- Non-metallic screw-on cable spacer

9N-SC140SC (CS140SC)

- Bulk pack non-metallic screw-on cable spacer

D. The Loop™ Low Cost Cable Hanger

- For Cat 5, 6, 7 cable and fiber-optic cable
- UL listed for air handling spaces • Add "P" suffix (9N-TL50P) for UV rated

9N-TL20 (TL20)

- 2" loop size

9N-TL25 (TL25)

9N-TL25P (TL25P)

- 2-1/2" loop size

9N-TL50 (TL50)

- 5" loop size



E. Wire Bushings

- For installing low voltage wires/cable (i.e. speaker wire) through single or double thickness drywall

9N-WB500 (WB500)

- For 1/2" hole size

9N-WB875 (WB875)

- For 7/8" hole size

9N-WB112 (WB112)

- For 1-1/8" hole size

9N-WB200 (WB200)

- For 2" hole size



A



B



C



D



E

A Arlington



A



B



C



D



E

A. EMT Bushings

- Plastic bushings for 1/2" to 4" EMT, rigid and PVC
- Listed for air handling spaces
- Sizes 2-1/2", 3", 3-1/2" & 4" can also be used for rigid, IMC & PVC rigid conduit

9N-EMT50 (EMT50)

9N-EMT75 (EMT75)

9N-EMT100 (EMT100)

9N-EMT125 (EMT125)

9N-EMT150 (EMT150)

9N-EMT200 (EMT200)

9N-EMT250 (EMT250)

9N-EMT300 (EMT300)

9N-EMT350 (EMT350)

9N-EMT400 (EMT400)

B. "D" Rings

- Non-conductive plastic
- Smooth bearing surfaces for easy wire management
- Two mounting holes per side for several mounting methods

9N-D22 (D22)

- 2-1/4" x 2" wiring space

9N-D33 (D33)

- 3-1/4" x 3-1/4" wiring space

9N-D35 (D35)

- 3-1/4" x 5" wiring space



C. Drive Rings

- Simple, nail-on installation
- Used to run wire or cable on interior wood framing members or exterior walls
- The larger the drive ring, the more wire it holds
- Galvanized, corrosion-resistant steel

9N-DR1 (DR1)

- 1/2"

9N-DR2 (DR2)

- 5/8"

9N-DR3 (DR3)

- 7/8"

9N-DR4 (DR4)

- 1-1/4"

D. Snap-In Bushings

- Fits trade sizes from 1/2" to 2-1/2"
- All plastic, protects cable as it runs through the knockouts in metal studs

9N-4400 (4400)

E. Beam Clamp

- Plated steel
- 75 lb. static load rating
- Threaded rod size 1/4-20

9N-BC25 (BC25)



DOLPHIN

A. Cable Clamps

- Nylon cable clamp
- Bag of 100
- Color - Natural

DP-DC14N (DC-1/4N)

- 1/4" diameter

DP-DC18N (DC-1/8N)

- 1/8" diameter


B. Cable Tie Mounts

- Black, 1" x 1"
- 4-way adhesive mounts
- Bag of 100
- RoHS Compliant

DP-DC1MB (DC1MB)



A



B

DYMO Rhino
Industrial Labeling Tools

C. Sharpie Fine Tip - Black (5ct)

- Permanent, long-lasting ink
- Retractable - never lose lid
- Different colors for different applications or cables
- There is only one SHARPIE® - Don't settle for anything else

7D-1752374 (1752374)



C



D

D. Sharpie Retractable Fine Tip - Black (2ct)

- Permanent, long-lasting ink
- Retractable - never lose lid
- Different colors for different applications or cables
- There is only one SHARPIE® - Don't settle for anything else

7D-32724PP (32724PP)

E. Sharpie Industrial Fine Tip - Black

- There is only one SHARPIE® - Don't settle for anything else
- Different colors for different applications or cables
- Permanent, long-lasting ink
- Retractable - never lose lid

7D-13763PP (13763PP)



E



F

F. RHINO 1/4" White Heat Shrink Tubes (5')

- Use with RHINO 3000, 5200 or 6000 label printers
- Thermal transfer print technology produces labels that are smear-proof and resistant to chemicals, solvents, grease, heat, moisture and other harsh elements
- Industrial-strength adhesive; split-back design for easy application

7D-18051 (18051)



G

G. RHINO 3/8" White Heat Shrink Tubes (5')

- Use with RHINO 3000, 5200 or 6000 label printers
- Industrial-strength adhesive; split-back design for easy app
- Thermal transfer print technology produces labels that are smear-proof and resistant to harsh elements

7D-18053 (18053)

H. RHINO 1/2" White Heat Shrink Tubes (5')

- Use with RHINO 3000, 5200 or 6000 label printers
- Industrial-strength adhesive; split-back design for easy app
- Thermal transfer print technology produces labels that are smear-proof and resistant to harsh elements

7D-18055 (18055)



H



A



C



E




G



B



D



F



H

DYMO Rhino

Industrial Labeling Tools

A. RHINO 3/8" Yellow Heat Shrink Tubes (5')

- Use with RHINO 3000, 5200 or 6000 label printers
- Thermal transfer print technology produces labels that are smear-proof and resistant to chemicals, solvents, grease, heat, moisture and other harsh elements
- Industrial-strength adhesive; split-back design for easy application

7D-18054 (18054)

B. RHINO 3/4" White Heat Shrink Tubes (5')

- Use with RHINO 3000, 5200 or 6000 label printers
- Thermal transfer print technology produces labels that are smear-proof and resistant to chemicals, solvents, grease, heat, moisture and other harsh elements
- Industrial-strength adhesive; split-back design for easy application

7D-18057 (18057)

C. RHINO 1/2" Yellow Vinyl (18')

- Use with RHINO 3000, 5200 or 6000 label printers
- Thermal transfer print technology produces labels that are smear-proof and resistant to chemicals, solvents, grease, heat, moisture and other harsh elements
- Industrial-strength adhesive; split-back design for easy application

7D-18432 (18432)

D. RHINO 1/2" Orange Vinyl (18')

- Use with RHINO 3000, 5200 or 6000 label printers
- Thermal transfer print technology produces labels that are smear-proof and resistant to chemicals, solvents, grease, heat, moisture and other harsh elements
- Industrial-strength adhesive; split-back design for easy application

7D-18435 (18435)

E. RHINO 1/2" Red Vinyl (18')

- Use with RHINO 3000, 5200 or 6000 label printers
- Thermal transfer print technology produces labels that are smear-proof and resistant to chemicals, solvents, grease, heat, moisture and other harsh elements
- Industrial-strength adhesive; split-back design for easy application

7D-18438 (18438)

F. RHINO 1/2" Green Vinyl (18')

- Use with RHINO 3000, 5200 or 6000 label printers
- Thermal transfer print technology produces labels that are smear-proof and resistant to chemicals, solvents, grease, heat, moisture and other harsh elements
- Industrial-strength adhesive; split-back design for easy application

7D-18441 (18441)

G. RHINO 3/8" White Vinyl (18')

- Use with RHINO 3000, 5200 or 6000 label printers
- Industrial-strength adhesive; split-back design for easy app
- Thermal transfer print technology produces labels that are smear-proof and resistant to harsh elements

7D-18443 (18443)

H. RHINO 1/2" White Vinyl (18')

- Use with RHINO 3000, 5200 or 6000 label printers
- Industrial-strength adhesive; split-back design for easy app
- Thermal transfer print technology produces labels that are smear-proof and resistant to harsh elements

7D-18444 (18444)



DYMO Rhino
Industrial Labeling Tools

A. RHINO 3/4" White Vinyl (18')

- Use with RHINO 3000, 5200 or 6000 label printers
- Industrial-strength adhesive; split-back design for easy app
- Thermal transfer print technology produces labels that are smear-proof and resistant to harsh elements

7D-18445 (18445)

B. RHINO 1/2" White Flexible Nylon Labels (11.5')

- Use with RHINO 3000, 5200 or 6000 label printers
- Industrial-strength adhesive; split-back design for easy app
- Thermal transfer print technology produces labels that are smear-proof and resistant to harsh elements

7D-18488 (18488)

C. RHINO 3/4" White Flexible Nylon Labels (11.5')

- Use with RHINO 3000, 5200 or 6000 label printers
- Industrial-strength adhesive; split-back design for easy app
- Thermal transfer print technology produces labels that are smear-proof and resistant to harsh elements

7D-18489 (18489)

D. RHINO 1/2" Yellow Flexible Nylon Labels (11.5')

- Use with RHINO 3000, 5200 or 6000 label printers
- Thermal transfer print technology produces labels that are smear-proof and resistant to harsh elements
- Industrial-strength adhesive; split-back design for easy app

7D-18490 (18490)

E. RHINO 3/4" Yellow Flexible Nylon Labels (11.5')

- Use with RHINO 3000, 5200 or 6000 label printers
- Industrial-strength adhesive; split-back design for easy app
- Thermal transfer print technology produces labels that are smear-proof and resistant to harsh elements

7D-18491 (18491)

F. RHINO 3/8" Clear Permanent Poly Labels (18')

- Use with RHINO 3000, 5200 or 6000 label printers
- Industrial-strength adhesive; split-back design for easy app
- Thermal transfer print technology produces labels that are smear-proof and resistant to harsh elements

7D-18508 (18508)

G. RHINO 1" White Flexible Nylon Labels (5')

- Use with RHINO 3000, 5200 or 6000 label printers
- Industrial-strength adhesive; split-back design for easy app
- Thermal transfer print technology produces labels that are smear-proof and resistant to harsh elements

7D-1734524 (1734524)

H. RHINO 6000 Hard Case Kit

- RHINO 6000 professional label printer with integrated impact bumpers
- RHINO CONNECT software to import, create, edit, transfer and print PC

7D-1734520 (1734520)

I. RHINO 6000 Label Printer

- Connects to PC via USB cable.
- Meets all ANSI & TIA/EIA-606-A industry labeling standards
- Exclusive, one-touch "Hot Keys" automatically size, space and format label text

7D-1734519 (1734519)



A



C



E



G



I



B



D



F



H



A



B



C



D




E



F



G

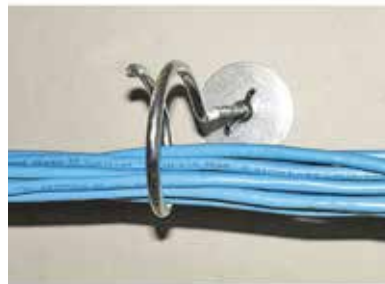

H



I

DYMO Rhino

Industrial Labeling Tools

A. RHINO 5200 Label Printer

- Meets all ANSI and TIA/EIA-606-A industry labeling standards
- Patented 1-touch "hot keys" automatically size, space & format label text for electrical & patch panels, terminal & 110 blocks, wire and cable flags, horizontal & vertical wraps

7D-1755749 (1755749)

B. RHINO 5200 Hard Case Kit

- RHINO 5200 label printer in a complete easy-to-carry case
- One 3/4" white flexible nylon label cartridge
- One 3/8" white vinyl label cartridge
- Rechargeable lithium-ion battery pack

7D-1756589 (1756589)

C. RHINO 4200 Label Printer

- QWERTY keyboard for fast and easy text entry
- Exclusive one-touch "Hot Keys"
- Prints 1/4", 3/8", 1/2" and 3/4" wide labels
- Rubber bumpers prevent damage after falls

7D-1801611 (1801611)



D. RHINO 4200 Case Kit

- RHINO 4200 label printer in a complete easy-to-carry case
- One 1/2" white vinyl label cartridge
- Rechargeable lithium-ion battery pack and AC adapter

7D-1835374 (1835374)

E. RHINO 1" Yellow Flexible Nylon Labels (11.5')

- Use with RHINO 3000, 5200 or 6000 label printers
- Industrial-strength adhesive; split-back design for easy app
- Thermal transfer print technology produces labels that are smear-proof and resistant to harsh elements

7D-1734525 (1734525)



F. Colored Distribution Rings

- Hide ugly black & white cable in finished spaces
- Available in black, white, and green colors
- Available sizes: small, medium, and large

I7-17AB (17AB)

G. Quick Shot Bridle Rings

- 1-1/2", 2" and 4" sizes available
- Installs 2x's faster than standard bridle ring/clamps
- Also available with open screw hole when powder shot guns are not allowed

I7-BR200SSC (BR-200-SSC)

H. Hollow Wall Bridle Rings

- 1-1/2", 2" and 4" sizes available
- Extra-long threaded leg for deep walls; great for bar joist, hollow walls & block construction
- Toggle wing, washer and thumb nut require no additional fasteners

I7-BR200TW (BR-200-TW)

I. Overhead Looped Cable Harness

- 1-1/2", 2" and 4" sizes available
- 1/4" threaded stud mounts directly to beam clamps and other fasteners
- Looped cable support saddle prevents cable "fall-out" and eliminates the need for wire ties

I7-CAT200 (CAT200)



A. Drive Rings

- Quick nail-on installation & open cable loop
- Supports any wire and cable; fast and easy
- 1/2", 5/8", 7/8" & 1-1/4" sizes available for multiple cable bundles

I7-DRV58 (DRV-5/8)



A

B. Cable Support Hook

- Supports sensitive data cables without causing stress
- Available w/angle bracket, beam clamp or support wings
- 1-1/2", 2" & 4" size

I7-JHK32 (JHK-32)



B

C. T Adapter

- BNC "T" Adapter Plug-Jack-Plug,50 OHM. Ten pack.

GE-30132750T (301-32750TP)



C

D. F Plug

- F crimp plug for RG 59 coax cable. Ten pack.
- Uses standard crimp tool

GE-04592MTP (0459-2M)



D

E. Poly Line

- Poly line 6500' with green tracer
- Ready to use, pre-punched hole in lid with resealable cap in a plastic bucket
- Use w/power fishing systems directly from the container
- Resists tangling, rot and mildew resistant

DV-430 (430)

DV-430500 (430-500)

- Same as Greenlee 430 except in 500 ft. canister



E



F

F. EZ Duct Connectors Combo Pack

- 2 each: inside corner, outside corner
- Splice/coupling, right angle, tee, end cap

GI-EZ58COMW (E-Z 58 COM-W)

G. EZ Duct Raceway

- 5/8" x 1/2", 6' lengths, white drilled and adhesive backing. UV stabilizer. Flame retardant PVC & ABS UL 94-V-0. Made in the USA.

GI-EZ586W (E-Z 58 6-W)



G

H. EZ Duct Raceway (Image not shown)

- 5/8" x 1-1/4", six, 6' lengths. Drilled & adhesive backing. UV stabilizer. Flame retardant PVC & ABS UL 94-V-0. Made in the USA.

GI-EZ756W (E-Z 75 6-W)



I. EZ Duct Raceway Quarter Round

- 1" quarter round, white only. One piece extrusion; hinged and interlocking. Ideal for hiding wire along floorboards and corners. Flame retardant PVC & ABS UL 94-V-0. Connectors with cutouts for other EZ Duct sizes also available. 12 yard double coat foam tape sold separately # EZ7553.

GI-EZQR6W (E-Z QR 6-W)



I



A. EZ Duct Raceway Quarter Round Connectors

- Quarter round connector combo pack: 2 each: Inside corner, outside corner, splice/coupling. Splice has cutouts for GI-EZ38, GI-EZ58 & GI-EZ75.

GI-EZQRCOMW (E-Z QR COM-W)



A



B. Wire-Nut® Wire Connectors

- Industry leading brand of screw on wire connectors
- No pre-twisting required - reusable for easy circuit changes and additions

IL-30072 (30-072)

- Blue 72B® 300V, 22 to 16 AWG, UL Cu/Cu only

IL-30073 (30-073)

- Orange 73B® 300V, 22 to 14 AWG, UL Cu/Cu only

IL-30074 (30-074)

- Yellow 74B® 600V, 22 to 14 AWG, UL Cu/Cu only



B

MODULAR DEVICES, INC.

C. RJ31X Jack (Image not shown)

- RJ 31X jack 8 position 8 conductor with shorting bar on pins 1,4,5,8, double stick tape or screw mount

MO-RJ31X (917UL)



D. RJ31X JACK (Image not shown)

- 2 foot plug to plug cord straight wired 8 conductor (Radionics)

MO-804R2 (804R2)

E. RJ 31X CORD (Image not shown)

- 7 foot plug to plug cord straight wired 8 conductor (Radionics)

MO-804R8 (804R8)



F. 3/4" Standard J-Hook, Size 12

- All steel construction, pre-assembled with rivet
- Organize and build distribution pathways for most cables
- The perfect solution for hanging applications
- Handles up to 12 lbs. or 16 Cat 5e/10 Cat 6 cables

TS-JH121 (TS-JH121)

1-5/16" Standard J-Hook, Size 21

- All steel construction, pre-assembled with rivet
- Organize and build distribution pathways for most cables
- The perfect solution for hanging applications
- Handles up to 17 lbs. or 50 Cat 5e/32 Cat 6 cables

TS-JH211 (TS-JH211)

2" Standard J-Hook, Size 32

- All steel construction, pre-assembled with rivet
- Organize and build distribution pathways for most cables
- The perfect solution for hanging applications
- Handles up to 17 lbs. or 80 Cat 5e/ 50 Cat 6 cables

TS-JH321 (TS-JH321)



F





A. 4" Standard J-Hook, Size 64

- Organize and build distribution pathways for most cables
- Handles up to 50 lbs. or 300 Cat 5e/185 Cat 6 cables
- All steel construction, pre-assembled with rivet
- The perfect solution for hanging applications

TS-JH641 (TS-JH641)

B. 1-5/16" 90 Degree Angle J-Hook, Size 21

- All steel construction, pre-assembled with rivet
- Organize and build distribution pathways for most cables
- The perfect solution for hanging applications
- Handles up to 17 lbs. or 50 Cat 5e/32 Cat 6 cables

TS-JH21AC1 (TS-JH21AC1)

2" 90 Degree Angle J-Hook, Size 32

- All steel construction, pre-assembled with rivet
- Organize and build distribution pathways for most cables
- The perfect solution for hanging applications
- Handles up to 17 lbs. or 80 Cat 5e/50 Cat 6 cables

TS-JH32AC1 (TS-JH32AC1)

4" 90 Degree Angle J-Hook, Size 64

- All steel construction, pre-assembled with rivet
- Organize and build distribution pathways for most cables
- The perfect solution for hanging applications
- Handles up to 50 lbs. or 300 Cat 5e/185 Cat 6 cables

TS-JH64AC1 (TS-JH64AC1)

C. 3/4" Batwing J-Hook, Size 12

- All steel construction, pre-assembled with rivet
- Organize and build distribution pathways for most cables
- The perfect solution for hanging applications
- Handles up to 12 lbs. or 16 Cat 5e/10 Cat 6 cables

TS-JH12W1 (TS-JH12W1)

1-5/16" Batwing J-Hook, Size 21

- All steel construction, pre-assembled with rivet
- Organize and build distribution pathways for most cables
- The perfect solution for hanging applications
- Handles up to 17 lbs. or 50 Cat 5e/32 Cat 6 cables

TS-JH21W1 (TS-JH21W1)

2" Batwing J-Hook, Size 32

- All steel construction, pre-assembled with rivet
- Organize and build distribution pathways for most cables
- Handles up to 17 lbs. or 80 Cat 5e/50 Cat 6 cables
- The perfect solution for hanging applications

TS-JH32W1 (TS-JH32W1)



A



B



C



A



B



C

A. Wire Ties

- 100 packs
- Nylon
- UV rated - black only
- R5-WT418B** (WT-4-18B)
- 4" 18 lb., tensile strength - black
- R5-WT418N** (WT-4-18N)
- 4", 18 lb., tensile strength - natural
- R5-WT850B** (WT-8-50B)
- 8" 50 lb., tensile strength - black
- R5-WT850N** (WT-8-50N)
- 8", 50 lb., tensile strength - natural
- R5-WT1250B** (WT-12-50B)
- 12" 50 lb., tensile strength - black
- R5-WT1250N** (WT-12-50N)
- 12", 50 lb., tensile strength - natural
- R5-WT1450B** (WT-14-50B)
- 14", 50 lb., tensile strength - black

Screw Mount Wire Ties

- 8", 50 lb. tensile strength
- Screw mount
- R5-WTS850B** (WTS-8-50B)
- Black
- R5-WTS850N** (WTS-8-50N)
- Natural

Plenum Rated Wire Ties

- 50 lb., tensile strength
- Red - Plenum rated
- R5-WT850RP** (WT-8-50RP)
- 8"
- R5-WT1250RP** (WT-12-50RP)
- 12"

B. Hook and Loop

- Black
- 9"
- Hook and Loop
- R5-WTV9B** (WTV9B)

C. Wire Tie Mounts

- 3/4" adhesive mount natural
- R5-WMAB** (WM-AB)



FPLR Solid Mid Cap Shielded Addressable

Part Number	Cable Type	AWG/# Cond.	Twisted Parallel/Zip	Jacketed Overall Shield	Package Type
WG-44411001	FPL	18/2	Twist	Mid Cap/OAS	1000' Reel
WG-44421004	FPL	16/2	Twist	Mid Cap/OAS	1000' Reel
WG-44441004	FPL	12/2	Twist	Mid Cap/OAS	1000' Reel

FPL Solid, Zip Cord

Part Number	Cable Type	AWG/# Cond.	Twisted Parallel/Zip	Jacketed Overall Shield	Package Type
WG-40025504	FPL	18/2	Parallel	Zip	500' Box
WG-40045004	FPL	14/2	Parallel	Zip	500' Box

FPL Solid Multi-Conductor, Jacketed, Shielded

Part Number	Cable Type	AWG/# Cond.	Twisted Parallel/Zip	Jacketed Overall Shield	Package Type
WG-42025504	FPL	18/2	Twist	JKT/OAS	500' Box
WG-42035504	FPL	18/4	Twist	JKT/OAS	500' Box
WG-42065504	FPL	16/2	Twist	JKT/OAS	500' Box
WG-42085004	FPL	14/2	Twist	JKT/OAS	500' Reel
WG-42105004	FPL	12/2	Twist	JKT/OAS	500' Reel

FPL Solid Multi-Conductor, Jacketed, Un-Shielded

Part Number	Cable Type	AWG/# Cond.	Twisted Parallel/Zip	Jacketed Overall Shield	Package Type
WG-41015504	FPL	22/4	Parallel	Jacketed	500' Box
WG-41065504	FPL	18/2	Twist	Jacketed	500' Box
WG-41075504	FPL	18/4	Parallel	Jacketed	500' Box
WG-41085004	FPL	18/6	Twist	Jacketed	500' Reel
WG-41115504	FPL	16/2	Twist	Jacketed	500' Box
WG-41125004	FPL	16/4	Twist	Jacketed	500' Reel
WG-41136104	FPL	14/2	Twist	Jacketed	500' Reel
WG-41155004	FPL	12/2	Twist	Jacketed	500' Reel

New York City Approved

Part Number	Cable Type	AWG/# Cond.	Twisted Parallel/Zip	Jacketed Overall Shield	Package Type
WG-55021004	LL5	16/1 Pr.	Twist	Jacketed	1000' Reel
WG-55031004	LL5	16/2 Pr.	Twist	Jacketed	1000' Reel
WG-55041004	LL5	14/1 Pr.	Twist	Jacketed	1000' Reel
WG-55061004	LL5	14/2 Pr.	Twist	Jacketed	1000' Reel
WG-55521004	LL5	16/1 Pr.	Twist		1000' Reel
WG-55531004	LL5	16/2 Pr.	Twist		1000' Reel
WG-55541004	LL5	14/1 Pr.	Twist		1000' Reel
WG-55555004	LL5	14/2 Pr.	Twist		500' Reel

FPLP Solid Multi-Conductor, Jacketed, Shielded

Part Number	Cable Type	AWG/# Cond.	Twisted Parallel/Zip	Jacketed Overall Shield	Package Type
WG-46025504	FPLP	18/2	Twist	JKT/OAS	500' Box
WG-46035004	FPLP	18/4	Twist	JKT/OAS	500' Reel
WG-46065004	FPLP	16/2	Twist	JKT/OAS	500' Reel
WG-46085004	FPLP	14/2	Twist	JKT/OAS	500' Reel

FPLP Solid Multi-Conductor, Jacketed, Un-Shielded

Part Number	Cable Type	AWG/# Cond.	Twisted Parallel/Zip	Jacketed Overall Shield	Package Type
WG-45065504	FPLP	18/2	Twist	Jacketed	500' Box
WG-45075504	FPLP	18/4	Twist	Jacketed	500' Box
WG-45085004	FPLP	18/6	Twist	Jacketed	500' Reel
WG-45115504	FPLP	16/2	Twist	Jacketed	500' Box
WG-45125004	FPLP	16/4	Twist	Jacketed	500' Reel
WG-45135004	FPLP	14/2	Twist	Jacketed	500' Reel
WG-45155004	FPLP	12/2	Twist	Jacketed	500' Reel



Article 760

The scope of this article covers the installation of wiring and equipment of fire alarm systems including all circuits controlled and powered by the fire alarm system including fire detection and alarm notification, guard's tour, sprinkler waterflow, and sprinkler supervisory systems; circuits controlled and powered by the fire alarm system include circuits for the control of building systems safety functions, elevator capture, elevator shutdown, door release, smoke doors and damper control, fire doors and damper control and fan shutdown, but only where these circuits are powered by and controlled by the fire alarm system.

Fire Power Limited Cable: **Type FPL, FPLR, FPLP**

NEC DEFINITIONS FOR ARTICLE 760

Fire Alarm Circuit: The portion of the wiring system between the load side of the overcurrent device or the power-limited supply and the connected equipment of all circuits powered and controlled by the fire alarm system. Fire alarm circuits are classified as either nonpower limited or power limited.

Non-Power-Limited: A fire alarm circuit powered by a source that complies with NEC Sections 760-21 and 760-23.

Power Limited (PLFA): A fire alarm circuit powered by a source that complies with NEC Section 760-41.