


Product  

# Specifications

## Fiber Optic Fusion Splice Sleeves

### KEY FEATURES

- Stainless steel strength members provides rigidity at splice
- Pre-shrunk, heat-bonded
- Constructed with a polyolefin copolymer inner tube & polyolefin outer tube

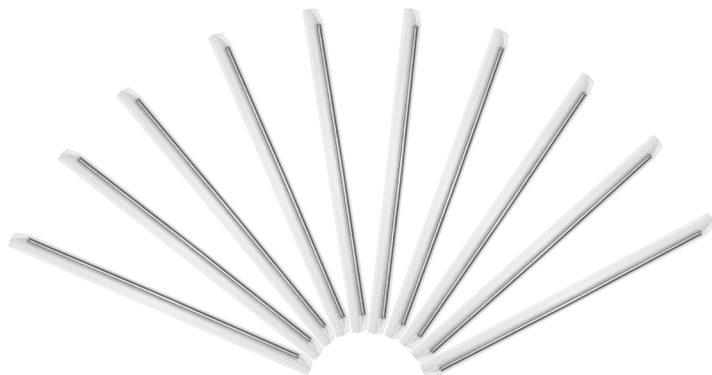


### ORDERING INFORMATION

PART NO.	DESCRIPTION
OFFSS-15-40	Fusion Splice Sleeves, 1.5 x 40 mm, 250 µm (Pack of 100)
OFFSS-30-40	Fusion Splice Sleeves, 3 x 40 mm, 250–900 µm (Pack of 100)
OFFSS-30-60	Fusion Splice Sleeves, 3.0 x 60 mm, 250–900 µm (Pack of 100)
OFFSS-09-40	Fusion Splice Sleeves, 4 x 40 mm, 250–900 µm (Pack of 100)
OFFSS-09-60	Fusion Splice Sleeves, 4 x 60 mm, 250–900 µm (Pack of 100)

### SPECIFICATIONS

MODEL	FIBER BUFFER	STRENGTH MEMBER	SIZE	LENGTH	SHRINK TEMPERATURE	HEATING TIME
OFFSS-15-40	250 µm	Stainless steel	1.5 mm (0.06 in)	40 mm	120 °C (248 °F)	50 s
OFFSS-09-40	250–900 µm		3.0 mm (0.12 in)	40 mm		90 s
OFFSS-09-60				60 mm		
OFFSS-30-40				40 mm		
OFFSS-30-60				60 mm		

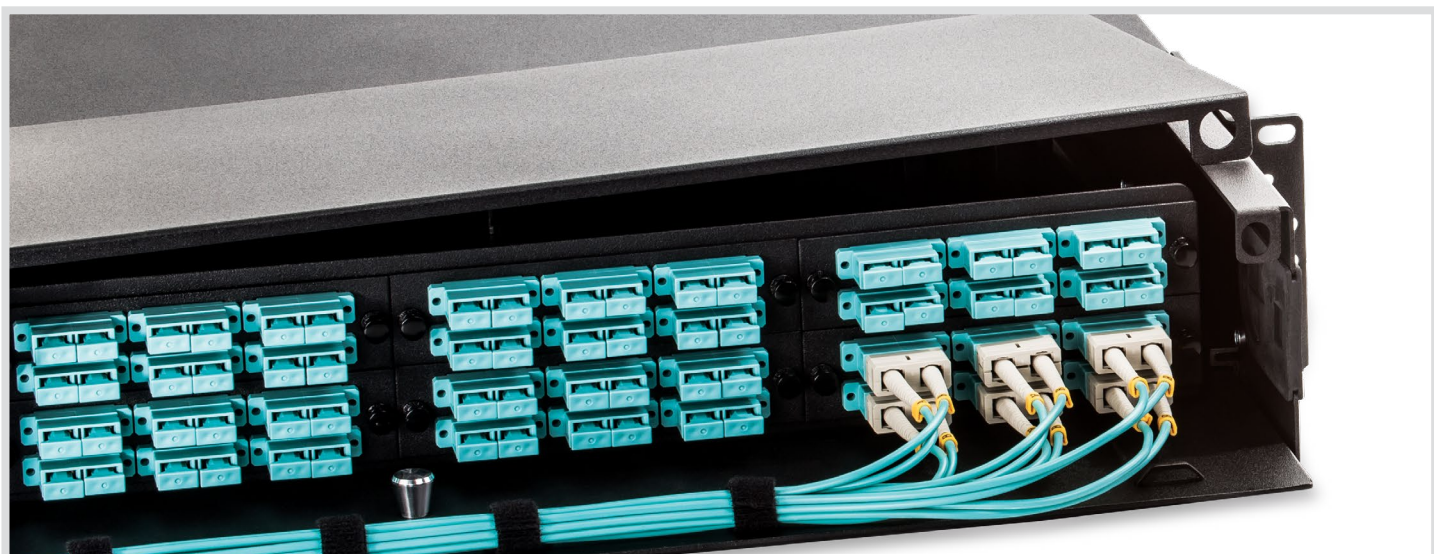

\*Need more customization, contact tech support for a consult.