




# WIRE TERMINATION

WWW.IDEALIND.COM • 1-800-435-0705 CUSTOMER ASSISTANCE

## Vinyl Insulated Male Disconnect Dimensions

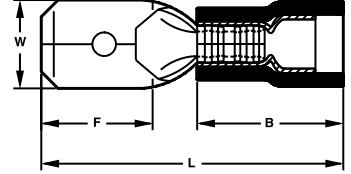

Wire Range (AWG)	Wire Range (mm <sup>2</sup> )	Tab Size (in.)	Tab Size (mm)	Max. Wire Ins. Dia. (in.)	Max Wire Ins. Dia. (mm)	Dimensions (in.)				Dimensions (mm)				Cat. No
						L	B	W	F	L	B	W	F	
22-18	0.5 - 1.0	.250 x .032	6.35 x 0.8	.150	3.8	.858	.413	.250	.303	21.8	10.5	6.35	7.7	<b>83-9971</b>
16-14	1.5 - 2.5	.250 x .032	6.35 x 0.8	.185	4.7	.858	.413	.250	.303	21.8	10.5	6.35	7.7	<b>83-9981</b>
12-10	4.0 - 6.0	.250 x .032	6.35 x 0.8	.244	6.2	.945	.512	.250	.303	24.0	13.0	6.35	7.7	<b>83-9991</b>

75°C/300 Volts max.

