

## SPECIFICATION SHEET



## DisplayPort HDBaseT over Cat5 Extender

- Supports resolutions up to 2560 x 1600
- Resolutions supported at distances up to:
  - 2560 x 1600—231ft (70m)
  - 1920 x 1080—330ft (100m)
- Supports Phantom Power—single power supply at either the transmitter or receiver
- HDCP & 3D Video Compliant
- TAA compliant

# Specifications: DisplayPort HDBaseT over Cat5 Extender

## Electrical Characteristics:


Max Resolutions Supported:	WQXGA (2560 x 1600 @ 60Hz) Full HD (1920 x 1080p @ 60Hz)
Features Supported:	HDBaseT, 3D, HDCP, EDID
Distance Supported:	2560 x 1600 @ 70m 1920 x 1080 @ 100m

## Power Adapter

Input Voltage:	100 ~240V, @ 50~60Hz
Input Current:	0.6A
Output Voltage:	18V
Output Current:	1.0A
Cable Length:	59" (1520 ± 100mm)
Pin DIA:	OD=4.7mm, ID=1.7mm
Center Pin Polarity:	Positive

## Physical Characteristics:

Operating Temperature:	0°C ~ 50° C
Storage Temperature:	-20°C ~ 70°C
Humidity:	0~80% RH
Dimensions (HxWxD):	23 x 108 x 86mm
Enclosure:	Metal
Approvals:	CE

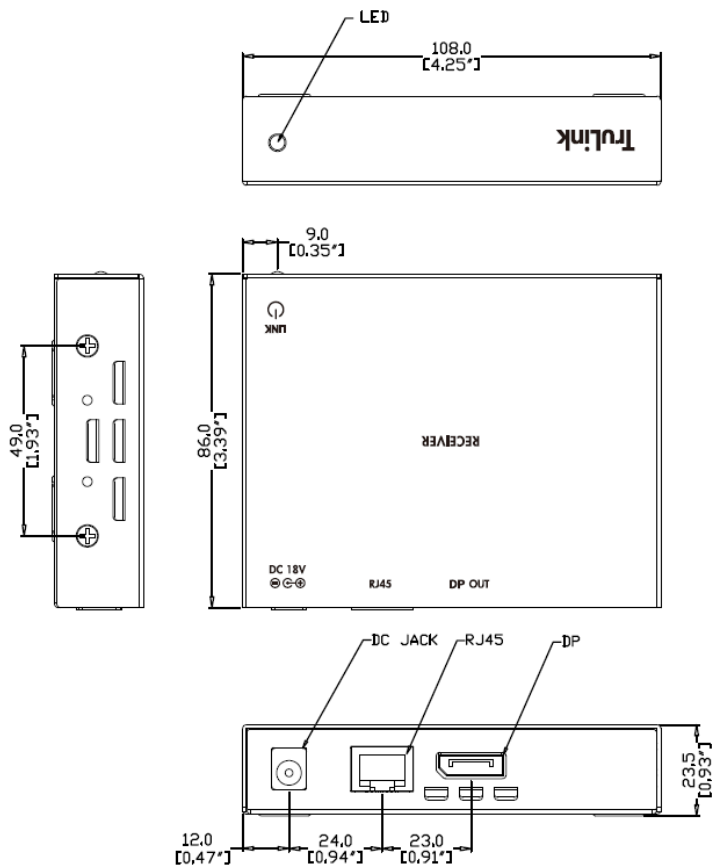

# Specifications: DisplayPort HDBaseT over Cat5 Extender

Part Number	Description	Weight (lbs)
29299	DisplayPort HDBaseT™ over Cat5 Extender Receiver	
29302	DisplayPort HDBaseT™ over Cat5 Extender Transmitter	
29303	DisplayPort HDBaseT™ over Cat5 Extender	
29304	DisplayPort to HDMI HDBaseT™ over Cat5 Extender	

©2014 Legrand All Rights Reserved SpecSheet MSPEC\_29299\_29302-4\_R0



CABLES TO GO

Cables To Go  
3555 Kettering Blvd.  
Moraine, OH 45439  
Phone: 800.CABL.911  
www.c2g.com

Follow Us

