


Product data sheet

Characteristics

BR1500G

APC Back-UPS Pro, 1500VA/865W, Tower, 120V, 10x NEMA 5-15R outlets, AVR, LCD, User Replaceable Battery

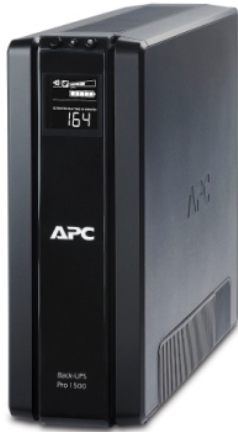

Overview

Lead time	Usually in Stock
-----------	------------------

Main

Main Input Voltage	120 V
Main Output Voltage	120 V
Kw Rating	865 W
Rated power in VA	1500 VA
Product or Component Type	Uninterruptible power supply (UPS)
Input Connection Type	NEMA
Output connection type	5 NEMA 5-15R 5 NEMA 5-15R surge
Cable length	6 ft (1.83 m)
Battery Type	Lead-Acid battery

Batteries & Runtime

Included Battery Modules	1
Battery Slots Empty	0
Typical recharge time	8 h
RBC Quantity	1
Battery Voltage	24 V
Battery Capacity	9.0 Ah
Battery Charge Power (Watts)	23 W rated
Battery Life	3...5 year(s)
Battery graph comments	This graph is based on actual measured runtime data. All measurements were taken with new, fully charged batteries and a balanced resistive load (PF = 1.0). Actual runtimes may vary from the values of this graph. Actual runtimes are dependent on several variables including battery age, battery charge level, environmental conditions and characteristics of the connected load.
Extendable Run Time	0

General

Provided equipment	User Manual USB cable
Number of power module free slots	0
Number of power module filled slots	0
Redundant	No

Physical

Height	11.85 in (30.1 cm)
Width	4.41 in (11.2 cm)
Depth	15.04 in (38.2 cm)
Net Weight	26.68 lb(US) (12.1 kg)
Mounting preference	No preference
Mounting Mode	Not rack-mountable
Two post mountable	0
USB compatible	Yes

Input

Input Frequency	50/60 Hz +/- 3 Hz auto-sensing
-----------------	--------------------------------

Output

Max Configurable Power (Watts)	865 W
Output Frequency (sync to mains)	50/60 Hz +/- 3 Hz sync to mains
Topology	Line Interactive
Waveform Type	Stepped approximation to a sine wave
Maximum configurable power in VA	1500 VA
Transfer Time	8ms typical : 12ms maximum

Conformance

Product Certifications	NOM[RETURN]TÜV[RETURN]ENERGY STAR V2.0 (USA)
Equipment protection policy	Lifetime : \$150000

Environmental

Ambient Air Temperature for Operation	32...104 °F (0...40 °C)
Relative Humidity	0...95 %
Operating altitude	0...30000 ft
Ambient Air Temperature for Storage	5...113 °F (-15...45 °C)
Storage Relative Humidity	0...95 %
Storage altitude	0...50000 ft (0.00...15240.00 m)
Acoustic level	45 dBA

Communications & Management

Control panel	Multi-function LCD status and control console
Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm

Surge Protection and Filtering

Surge energy rating	354 J
Filtering	Full time multi-pole noise filtering :5% of IEEE surge let-through : zero clamping response time: in
Let Through Voltage Rating	300 V






Ordering and shipping details

Category	11309 - APC RESALE PRODUCTS
GTIN	731304268772
Returnability	No
Country of origin	PH

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.24 in (38.7 cm)
Package 1 Width	19.21 in (48.8 cm)
Package 1 Length	9.37 in (23.8 cm)
Package 1 Weight	29.43 lb(US) (13.35 kg)
SCC14	10731304268779

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
ENERGY STAR®	 ENERGY STAR UPS V2.0 (USA)
RECh Regulation	 RECh Declaration
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
Optimized Energy Efficiency	Energy efficient product
Take-back	Take-back program available

Contractual warranty

Warranty	3 years repair or replace
----------	---------------------------