
PS4-11-15WT

RAB

Type:

Date:

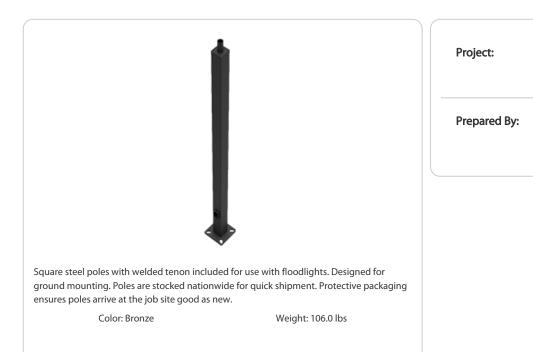

Technical Specifications

Compliance	Color:	Shaft Size:
CSA Listed:	Bronze powder coating	4"
Suitable for wet locations	Tenon:	Hand Hole Dimensions:
Construction	Welded 2 3/8" tenon included	3" x 5"
Shaft:	Height:	Bolt Circle:
46,000 p.s.i. minimum yield.	15 FT	8 1/2"
Hand Holes:	Gauge:	Base Dimension:
Reinforced with grounding lug and removable cover	11	8"
Base Plates:	Wall Thickness:	
Slotted base plates 36,000 p.s.i.	1/8"	
Shipping Protection:		
All poles are shipped in individual corrugated cartons to prevent finish damage		

Technical Specifications (continued)

Construction

Weight:

134 lbs

Anchor Bolt:

Galvanized anchor bolts and galvanized hardware and anchor bolt template. All bolts have a 3" hook.

Anchor Bolt Templates:

WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available <u>online</u>.

Pre-Shipped Anchor Bolts:

Bolts can be pre-shipped upon request for additional freight charge

Max EPA's/Max Weights:

70MPH 17.4 ft./450 lb. 80MPH 12.5 ft./440 lb. 90MPH 9.0 ft./440 lb. 100MPH 6.6 ft./440 lb. 110MPH 4.8 ft./435 lb. 120MPH 3.4 ft./435 lb. 130MPH 2.3 ft./435 lb. 140MPH 1.4 ft./430 lb. 150MPH 0.8 ft./420 lb


Other

Terms of Sale:

Pole Terms of Sale is available online.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.



Features

Designed for ground mounting

Heavy duty TGIC polyester coating

Reinforced hand holes with grounding lug and removable cover for easy wiring access

Pole caps, base covers & bolts are sold separately

Custom manufactured for each application