




**PASS & SEYMOUR®**  
 Tamper-Resistant PlugTail™ Devices  
 Hospital Grade 15 & 20A, 125V

**PTTR26262HG, PTTR26362HG**

**PlugTail™. The fastest, most consistent and reliable wiring devices – ever.**

Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each extra heavy-duty receptacle. The connector simply snaps into the back of the device — no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required.

A sturdy mechanical shutter system helps prevent children from sticking objects into the receptacle. The toughest and safest hospital grade tamper-resistant receptacle available.

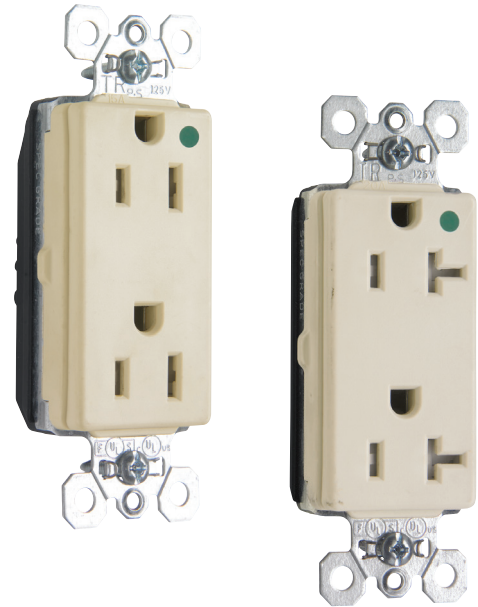

**FEATURES & BENEFITS**

**Auto-ground clip** assures positive ground.

**Built-in connector** features large brass terminal blades to ensure consistent, reliable electrical connections.

**Large brass contacts** snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

**.036 inch thick, brass, triple-wipe power contacts** for lasting retention.

**Dual mechanical shutter system** to help prevent insertion of foreign objects.

**Plated steel wrap strap design** for maximum durability and corrosion resistance.

**Ultrasonically welded polycarbonate connector housing** secures terminations and conductors in a UL Listed, finger safe housing.

**Pre-stripped connector leads** fasten to conductors, easier than standard pigtails.



PTTR26262HG

**No exposed terminals** create a finger safe application before, during, and after installation.

**FIELD USES/VERTICAL MARKETS**

■ Health Care

■ Education

■ Institutional



# PASS & SEYMOUR®

## Tamper-Resistant PlugTail™ Devices Hospital Grade 15 & 20A, 125V

### ORDERING INFORMATION

Catalog Number	Rating		Color	NEMA Config. No.
	A.	V.		
<b>Hospital Grade Receptacles</b>				
PTTR26262HGI	15	125	Ivory	5-15R
PTTR26262HGW	15	125	White	5-15R
PTTR26262HG	15	125	Brown	5-15R
PTTR26262HGBK	15	125	Black	5-15R
PTTR26262HGRED	15	125	Red	5-15R
PTTR26262HGLA	15	125	Light Almond	5-15R
PTTR26362HGI	20	125	Ivory	5-20R
PTTR26362HGW	20	125	White	5-20R
PTTR26362HG	20	125	Brown	5-20R
PTTR26362HGBK	20	125	Black	5-20R
PTTR26362HGRED	20	125	Red	5-20R
PTTR26362HGLA	20	125	Light Almond	5-20R

Catalog Number	Wire Type	Wire Length
<b>PlugTail Connectors – Right Angle</b>		
PTRA6SOL	Solid	6"
PTRA6STR	Stranded	6"
PTRA6SOLB25	Solid	25"
PTRA6STRB25	Stranded	25"
<b>PlugTail Connectors – Right Angle with WAGO Connectors</b>		
PTRA6SOLBP	Solid	6"
PTRA6STRBP	Stranded	6"
<b>PlugTail Connectors – Right Angle with Ground Screw</b>		
PTRA6SOLG	Solid	6"
PTRA6STRG	Stranded	6"



NEMA  
5-15R



NEMA  
5-20R

For more information on these and other P&S products refer to our Catalog or visit our web site.

Tamper-Resistant PlugTail™ Devices  
Hospital Grade 15 & 20A, 125V


**TECHNICAL SPECIFICATIONS**

**3rd Party Compliance**

cULus Listed, File Number E140596, Standard UL498.  
Federal Specification WC596.  
Conforms to NEMA WD-1 and WD-6, Hospital Grade.

**Performance**

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30° C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C to, minimum -40°C without impact

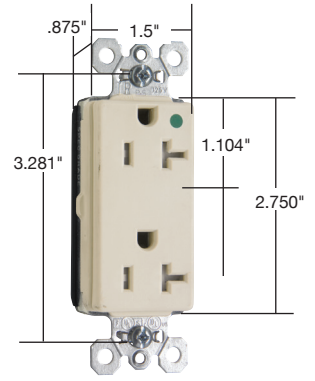


**Dimensions for 15 & 20 Amp**

**PlugTail Receptacle Materials**

Face	Nylon	Line Contacts	.036 688 Brass
Back Body	PVC	Auto Ground Clip	Steel
Assembly Drive Screw	Zinc-Plated Steel	Mounting Strap	.042 Zinc-Plated Steel
Tamper Shutter	Thermoplastic	Mounting Screws	Tri-Drive Steel

**PlugTail Connector Materials**

Housing	Polycarbonate	Contacts	.030 Brass
---------	---------------	----------	------------

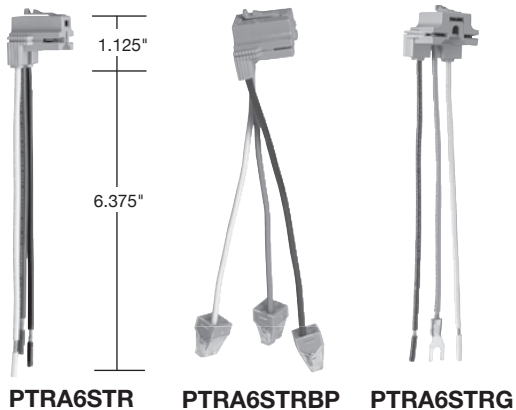

**Warranty**

1 Year  
C.O.O. Mexico

For more information on these and other P&S products refer to our Catalog or visit our web site.

## ALSO AVAILABLE...

- Hospital Grade Devices
- Ground Continuity Monitoring (GCM)
- Turnlok® Locking Devices
- IEC 309 Industrial Products
- SPD & Isolated Ground Devices
- Straight Blade Plugs & Connectors
- Weatherproof Boxes & Covers
- Flexcor® Wire Mesh Grips



### Electrical Wiring Systems

P.O. Box 4822  
Syracuse, NY 13221-4822  
Phone: 1.800.776.4035  
[www.legrand.us/passandseymour](http://www.legrand.us/passandseymour)

570 Applewood Crescent  
Vaughan, Ontario L4K 4B4  
Phone: 905.738.9195  
[www.legrand.ca](http://www.legrand.ca)