

NEW
more on
reverse

Indoor IN BOX™ Recessed Electrical Box


For flush-to-the-wall mounting of plasma or LCD TVs



Arlington's recessed non-metallic IN BOX™ for indoor use allows plasma and LCD TVs to mount flush against the wall. Great for furniture or countertop items like coffee makers or microwave ovens too!


It's available in one- or two-gang styles – in black and white – for power or low voltage applications in new construction or old work.

Using the supplied separator with the two-gang style allows you to install one power and one low-voltage device in the box.

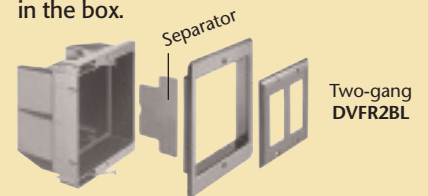

Plugs stay inside the box – without extending past the wall

- For new work; positioning tabs for 1/2" wall thickness assure proper installation on stud
- Horizontal or vertical mounting
- Textured, paintable trim plate
- Accepts single-gang wiring devices
- UL Listed. CSA with grounding lug



Arlington

1 Stauffer Industrial Park
Scranton, PA 18517


800/233.4717

Fax 570/562.0646

www.aifittings.com

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Description Indoor IN BOX™ | Color | Unit Pkg | Std Pkg |
|----------------|---------------------------|----------------------------|-------|----------|---------|
| DVFR1W | 14330 | Single gang | White | 1 | 4 |
| DVFR1BL | 14329 | 21.0 cu. in. | Black | 1 | 4 |
| DVFR2W | 14331 | Two gang | White | 1 | 4 |
| DVFR2BL | 14335 | 37.0 cu. in. | Black | 1 | 4 |

Includes recessed box with trim plate, (one each) duplex and decorator face plates (two-gang supplied with (1) decorator plate only), NM cable connector, (2) #6 x 1/2" and (2) #8 x 3" installation screws.

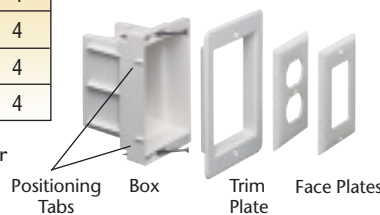

One-gang DVFR1W
Kit components (screws not shown)

Patented/Other patents pending

Indoor IN BOX™ Recessed Electrical Box

Mount TVs flush against wall – Plugs stay in the box

Old Work

- 1 Cut hole next to stud (3-3/8" x 6" for single-gang, 5-1/4" x 6" for two-gang).
- 2 Install NM cable connector (supplied). Pull wire. Mount box to stud with (2) #8 x 3" screws (supplied) through the angled holes in the outer edge of the box. Use positioning tabs (see detail below) to allow for drywall thickness.
- 3 Wire in receptacle. (See below for two-gang combo installation).
- 4 Attach paintable trim plate with (2) #6 x 1/2" screws (supplied).




New Construction

(single-gang shown)




Arlington


1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com



Thread (2) #8 x 3" screws (supplied) through the angled holes in the outer edge of the box. Mount box to stud, using positioning tabs to allow for finished wall (drywall) thickness.

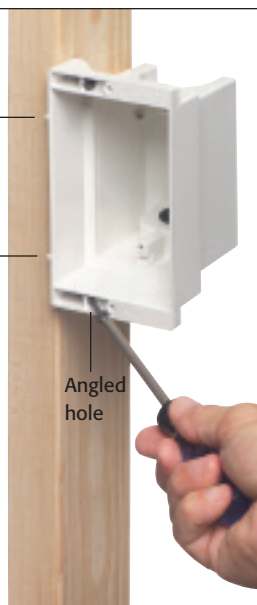

Install NM cable connector (supplied). Pull wires. After wall installation is complete, wire in receptacle. Add trim plate. (See steps 3 and 4 above.)

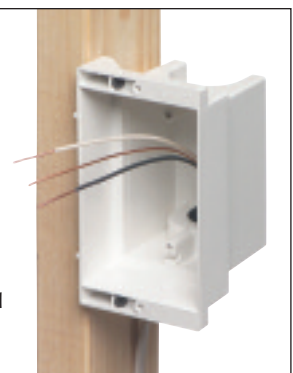

Distributed by