

PS5262, PS5362

Solid brass straps provide enhanced ground conductivity.

With brass straps and Auto-Ground, these rugged receptacles are ideal for any installation in which ground path through the strap is especially critical. They also provide all the durability and ease-of-installation features of our other Heavy-Duty Receptacles – including triple-wipe brass power contacts, impact-resistant construction, and screw-pressure-plate back wiring.



FEATURES & BENEFITS

Strap tabs wrap around face to prevent strap from separating from face and back body.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

Tri-drive brass terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.

Heavy-duty brass strap for superior conductivity.

Auto-ground clip assures positive ground.

.032 inch thick, brass, triple-wipe power contacts for lasting retention.

Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.



PS5362W

FIELD USES/VERTICAL MARKETS

■ Health Care

■ Education

■ Institutional



PASS & SEYMOUR®

Straight Blade Receptacles Heavy-Duty 15 & 20A, 125V

ORDERING INFORMATION

Catalog Number	Rating A. V.	Color	NEMA Config. No.
Duplex Receptacles Back & Side Wire			
PS5262I	15 125	Ivory	5-15R
PS5262W	15 125	White	5-15R
PS5262	15 125	Brown	5-15R
PS5262GRY	15 125	Gray	5-15R
PS5262BK	15 125	Black	5-15R
PS5262RED	15 125	Red	5-15R
PS5262LA	15 125	Light Almond	5-15R
PS5362I	20 125	Ivory	5-20R
PS5362W	20 125	White	5-20R
PS5362	20 125	Brown	5-20R
PS5362GRY	20 125	Gray	5-20R
PS5362BK	20 125	Black	5-20R
PS5362RED	20 125	Red	5-20R
PS5362LA	20 125	Light Almond	5-20R



NEMA
5-15R



NEMA
5-20R

For more information on these and other P&S products refer to our Catalog or visit our web site.

PASS & SEYMOUR®

Straight Blade Receptacles Heavy-Duty 15 & 20A, 125V



TECHNICAL INFORMATION

3rd Party Compliance

UL Listed, File Number E140596, Standard UL498.
Federal Specification WC596.
CSA Certified File Number LR16063, Standard CSA-C22.2 No. 42 General Use Receptacles.
Conforms to NEMA WD-1 and WD-6.

Performance

Electrical


Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

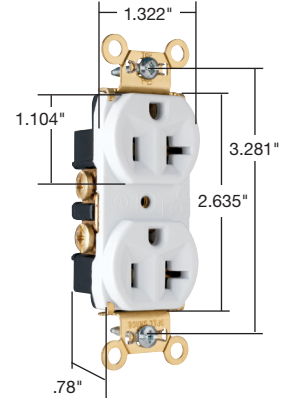

Dimensions for
15 & 20 Amp

Materials

Face	Nylon	Terminal Screws	#8 Tri-Drive Brass
Back Body	PVC		(Neutral = Nickel-Plated Steel)
Line Contacts	.032 688 Brass	Ground Screw	#8 Hex Tri-Drive Brass
Mounting Strap	.043 260 Brass	Assembly Drive Screw	Zinc-Plated Steel
Ground Contacts	.040 688 Brass	Auto-Ground Clip	Stainless Steel
Pressure Plate	.080 Steel	Mounting Screws	Tri-Drive Steel

Warranty

1 Year
C.O.O. Mexico

For more information on these and other P&S products refer to our Catalog or visit our web site.

ALSO AVAILABLE...

- Hospital Grade Devices
- PlugTail™ Devices
- SPD & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips



Electrical Wiring Systems

P.O. Box 4822
Syracuse, NY 13221-4822
Phone: 1.800.776.4035
www.legrand.us/passandseymour

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
Phone: 905.738.9195
www.legrand.ca