

ST-ST 62.5/125 μ m OM1 MM Duplex Fiber Optic Jumper




Package Includes

- A. ST-ST 62.5/125 μ m MM Duplex Fiber Jumper, 1 pc.
- B. Test Results Label, 1 pc.

Features and Benefits

- Made from OFNR riser rated cables, exceeding industry requirements
- Used with ICC fiber optic products
- Available in 1, 2, 3, 5, 7, and 10 meters
- Dust Cap included
- Test results included

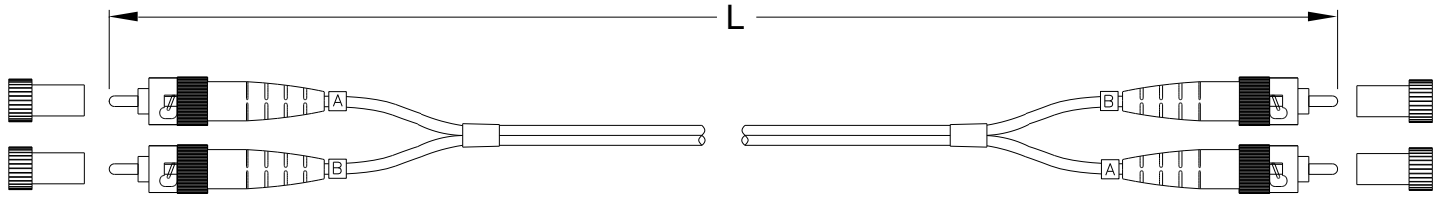

NOTE: UNLESS OTHERWISE SPECIFIED

1. Cable:

- A. Color: Orange
- B. Fiber Counts: 2 Fiber Zipcord
- C. Fiber Type: Multimode 62.5/125µm
- D. Attenuation: 2.9/0.6 dB/km @ 850/1300 nm
- E. Bandwidth: 220 MHz.km EMB @ 850 nm
- F. Cable Data:
 - Cable diameter: .079 in (2.0mm)
 - Weight: 12 lbs./kft
 - Bend radius: 1.2" MIN
 - Loading: 135 lbs. MAX
 - Impact cycle: 1500

ITEM NUMBER	L (LENGTH)
ICFOJ7C301	1 METER ± 10 CM
ICFOJ7C302	2 METER ± 10 CM
ICFOJ7C303	3 METER ± 10 CM
ICFOJ7C305	5 METER ± 10 CM
ICFOJ7C307	7 METER ± 10 CM
ICFOJ7C310	10 METER ± 10 CM

2. ST Connector:

- A. Ferrule: Zirconia
- B. Insertion Loss: 0.2 dB Typical, 0.3 dB MAX
- C. Reflection: N/A

3. Compliance:

- A. ANSI/TIA-568-C.3

4. Length: XX: 01, 02, 03, 05, 07, 10