



PRODUCT SPEC SHEET  
OE-32MON720P

## HIGH BRIGHTNESS LED SEMI COMMERCIAL MONITOR

16/7/365 Operating Capability



This professional-grade widescreen LED 32" color monitor offers HDMI, USB, VGA and AV inputs. Boasting 16.7 million colors and HD resolution, this monitor will make your video come to life.

### FEATURES

- 32" Diagonal Viewing Size
- 1366x768 HD Resolution
- 400 Nits Brightness
- Ideal for 16/7/365 Applications
- HDMI, USB, VGA, AV Inputs
- Includes HDMI Cable and Power Cable
- 30-Month Warranty
- Part #: OE-32MON720P
- UPC: 840049301245
- Length: 28.8"
- Width: 7.7"
- Height: 18.7"
- Weight: 14.9 lbs.
- UL Listing

FOR MORE INFORMATION, CONTACT YOUR ADI SALES PERSON.



## Moniteur semi-commercial à DEL très lumineuses

Capacité de fonctionnement 16/7/365



Ce moniteur couleur de 32 po à DEL de qualité professionnelle est doté d'entrées HDMI, USB, VGA et AV. Avec ses 16,7 millions de couleurs et sa résolution HD, ce moniteur vous permettra de visionner des vidéos de qualité inégalée.

### CARACTÉRISTIQUES

- Dimensions d'affichage diagonales de 32 po
- Résolution HD 1366x768 p
- Luminosité 400 nits
- Ideal for 16/7/365 Applications
- Entrées HDMI, USB, VGA, AV
- Comprend des câbles HDMI et d'alimentation
- Garantie de 30 mois
- N° de pièce : 0E-32MON720P
- UPC : 840049301245
- Longueur : 28,8 po
- Largeur : 7,7 po
- Hauteur : 18,7 po
- Poids : 14,9 lb
- Homologué UL



## HIGH BRIGHTNESS LED SEMI COMMERCIAL MONITOR

16/7/365 Operating Capability



### DLED

Size	32" diagonal
Panel	HD
Display Scale	16:9
Backlight	DLED
Maximum Resolution	1366x768
Best Working Resolution	1366x768@60Hz
Pixel Pitch	0.02" x 0.02" (0.510mm x 0.510mm)
Active Area	27.4" x 15.4" (697.9mm x 392.3mm)
Viewing Angle	H: 178°, V: 178° (CR>10)
Center Luminance of White	Typ.: 400cd/m <sup>2</sup> (NITS)
Contrast Ratio	Typ.: 1100 : 1
Response Time	Typ.: 9ms (GTG)
Display Color	16.7 Million
Color Gamut	Typ.: 72% NTSC

### STRUCTURE SIZE

Model	Plastic construction
Size W x H x D (without base)	28.8" x 3.2" x 17.1" (732 x 80.9 x 434mm)
Size W x H x D (with base)	28.8" x 7.7" x 18.7" (732 x 195.6 x 474.6mm)
Size W x H x D Packing size (with base)	31.6" x 5.7" x 22.2" (805 x 145 x 565mm)
Weight (with base)	Net weight 9.9 lbs (4.5 Kg) Gross weight: 14.9 lbs (6.8 Kg)
VESA	7.9" x 3.9" (200mm x 100mm)

### INTERFACE CONFIGURATION (ALL MODELS)

Input Interface	VGA	1
	AUDIO IN	1
	VIDEO (IN/LIN/RIN)	1
	USB	2
	AUDIO OUT	1
	COAXIAL OUT	1
	HDMI	3

FOR MORE INFORMATION, CONTACT YOUR ADI SALES PERSON.

## HIGH BRIGHTNESS LED SEMI COMMERCIAL MONITOR

16/7/365 Operating Capability



### FUNCTION PARAMETER (ALL MODELS)

System	Menu language	English/French/Spanish/Italian Netherlands/Polish/Czech/Danish
	Sleep time setting	Yes
	Video format support	MJPEG, MPEG-1, MPEG-2, MPEG-4, H.264, FLV
	Audio format support	MP3, WAV
	Picture format support	JPG/JPEG, BMP, PNG
	Text format support	TEXT
Picture	Picture mode	User/Dynamic/Standard
	Color temperature	User/Cool/Medium/Warm
	Comb filtering	3D
Sound	Sound mode	Standard/Music/Movie/ Sports/User
	Mute	Yes
	Stereo sound	Yes

### POWER MGT (ALL MODELS)

Size	32"
Power input	100V-240V AC 60/50Hz
Working consumption	≤75W
Standby consumption	≤0.5W (auto wake up off model)
Audio power	10Wx2

### ACCESSORY (ALL MODELS)

Power Cable	1PCS
HDMI Cable	1PCS
IR Remote Control	1PCS
AAA Batteries	1PCS
Screws for Mounting Monitor	1PCS
Screws for Installing Monitor Stand	1PCS
Base of Stands	1PCS
User's Manual	1PCS

### BEZEL SIZE/MM

Model	Left	Right	Top	Bottom
OE-32MON720P		0.6" (15.1mm)		0.9" (22.6mm)

### SAFETY & CERTIFICATION (ALL MODELS)


Safety (class I)	Withstand voltage strength	2.5KV DC/60s
	Leakage current	≤3.5mA (264V AC/60s)
	Earthing protective resistance	≤100mΩ (25A DC/20s)
Authentication		CE/FCC/ROHS/HDMI/UL/WEEE/REACH
Remote control area		≥8m straight line ≥7m horizontal 330° and vertical 315°
Environment	Working condition	Temperature: 32°F-104°F(0°C-40°C) Humidity: 10%-90% Atmosphere: 86KPa-104KPa
	Storage condition manual	Temperature: -4°F-122°F (-20°C-50°C) Humidity: 5%-95% Atmosphere: 86KPa-104KPa

FOR MORE INFORMATION, CONTACT YOUR ADI SALES PERSON.

## HIGH BRIGHTNESS LED SEMI COMMERCIAL MONITOR

16/7/365 Operating Capability

### MOUNTING ON THE WALL

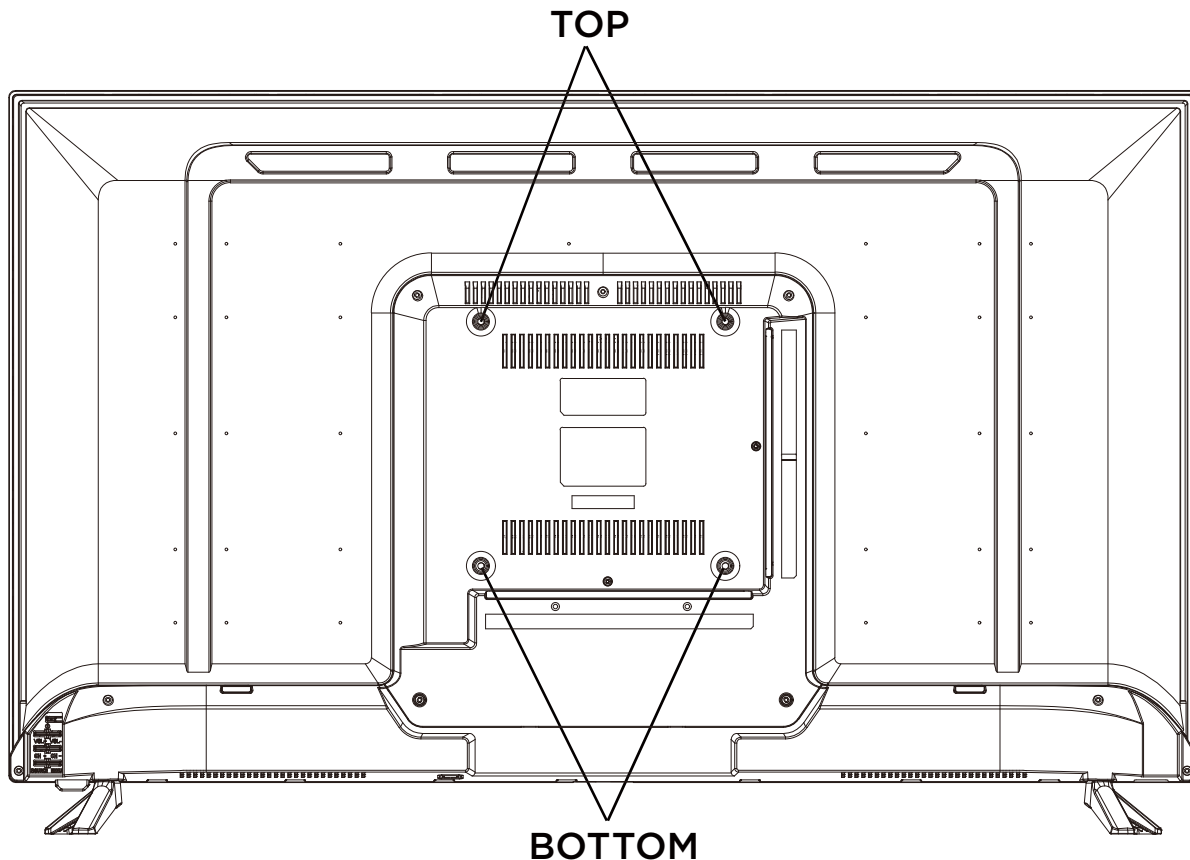

### VESA MOUNTING

Model	Mounting Dimension	TOP	BOTTOM
OE-32MON720P	7.9" x 3.9" (200mm x 100mm)	HM6.0 x 14mm	HM6.0 x 14mm

\* HARDWARE INCLUDED IN MONITOR BOX \*

FOR MORE INFORMATION, CONTACT YOUR ADI SALES PERSON.

## HIGH BRIGHTNESS LED SEMI COMMERCIAL MONITOR




16/7/365 Operating Capability



### Connecting power supply


### HDMI input connection

Connect to devices with HDMI output interface DVR/NVR

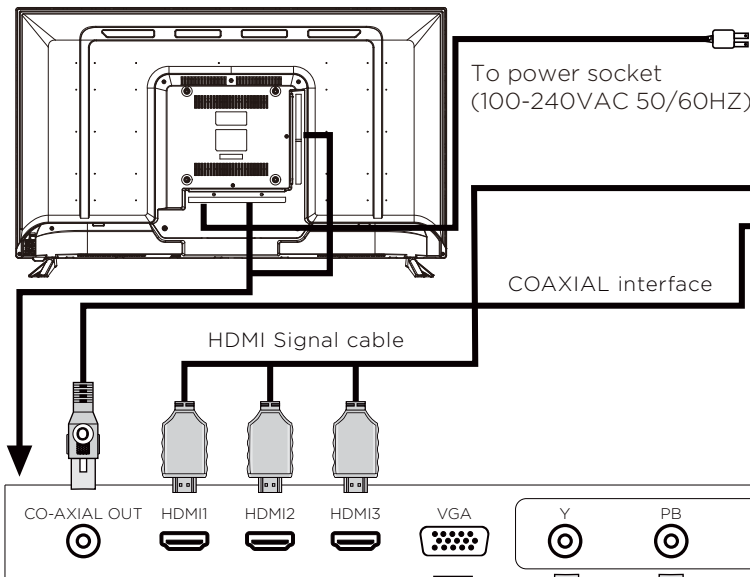

Connect to devices with COAXIAL interface

### COAXIAL input connection



### Component input connection


Connect to devices with VGA output interface

### Y/PB/PR connection

Connect to devices with Y/PB/PR output



### VIDEO connection

Connect to devices with VIDEO output



VGA input connection

AUDIO Out input connection



Coaxial Cable

### Coaxial-out connection

Connect to audio devices with coaxial interface

