



HIGH BRIGHTNESS LED SEMI COMMERCIAL MONITOR

16/7/365 Operating Capability



This professional-grade widescreen LED 43" color monitor offers HDMI, USB, VGA and AV inputs. Boasting 16.7 million colors and FHD resolution, this monitor will make your video come to life.

FEATURES

- 43" Diagonal Viewing Size
- 1920x1080 Full HD Resolution
- 500 Nits Brightness
- Ideal for 16/7/365 Applications
- HDMI, USB, VGA, AV Inputs
- Includes HDMI Cable and Power Cable
- 30-Month Warranty
- Part #: OE-43MON1080
- UPC: 840049303409
- Length: 38.2"
- Width: 8.3"
- Height: 23.9"
- Weight: 25.1 lbs.
- UL Listing

FOR MORE INFORMATION, CONTACT YOUR ADI SALES PERSON.



Moniteur semi-commercial à DEL très lumineuses

Capacité de fonctionnement 16/7/365



Ce moniteur couleur de 43 po à DEL de qualité professionnelle est doté d'entrées HDMI, USB, VGA et AV. Avec ses 16,7 millions de couleurs et sa résolution FHD, ce moniteur vous permettra de visionner des vidéos de qualité inégalée.

CARACTÉRISTIQUES

- Dimensions d'affichage diagonales de 43 po
- Résolution Full HD 1920x1080 p
- Luminosité 500 nits
- Ideal for 16/7/365 Applications
- Entrées HDMI, USB, VGA, AV
- Comprend des câbles HDMI et d'alimentation
- Garantie de 30 mois
- N° de pièce : OE-43MON1080
- UPC : 840049303409
- Longueur : 38,2 po
- Largeur : 8,3 po
- Hauteur : 23,9 po
- Poids : 25,1 lb
- Homologué UL



HIGH BRIGHTNESS LED SEMI COMMERCIAL MONITOR

16/7/365 Operating Capability



DLED

Size	43" diagonal
Panel	FHD
Display Scale	16:9
Backlight	DLED
Maximum Resolution	1920x1080
Best Working Resolution	1920x1080@60Hz
Pixel Pitch	0.02" x 0.02" (0.4902mm x 0.4902mm)
Active Area	37" x 20.8" (941.2mm x 529.4mm)
Viewing Angle	H: 178°, V: 178° (CR>10)
Center Luminance of White	Typ.: 500cd/m ² (NITS)
Contrast Ratio	Typ.: 1200:1
Response Time	Typ.: 8ms (GTG)
Display Color	16.7 Million
Color Gamut	Typ.: 72% NTSC

STRUCTURE SIZE

Model	Plastic construction
Size W x H x D (without base)	38.2" x 3.7" x 22.3" (972.5 x 94.2 x 566mm)
Size W x H x D (with base)	38.2" x 8.3" x 23.9" (972.5 x 211.3 x 608.2mm)
Size W x H x D Packing size (with base)	41.3" x 26.7" x 6.2" (1050 x 680 x 160mm)
Weight (with base)	Net weight 16.4 lbs (7.45 Kg) Gross weight 25.1 lbs (11.4 Kg)
VESA	7.9" x 7.9" (200mm x 200mm)

INTERFACE CONFIGURATION (ALL MODELS)

Input Interface	COAXIAL OUT	1
	HDMI	2
	VGA	1
	AUDIO IN	1
	Y/PB/PR	1
	VIDEO (IN/LIN/RIN)	1
	USB	1
	AUDIO OUT	1

FOR MORE INFORMATION, CONTACT YOUR ADI SALES PERSON.

HIGH BRIGHTNESS LED SEMI COMMERCIAL MONITOR

16/7/365 Operating Capability



FUNCTION PARAMETER (ALL MODELS)

System	Menu language	English/French/Spanish/Italian Netherlands/Polish/Czech/Danish
	Sleep time setting	Yes
	Video format support	MJPEG, MPEG-1, MPEG-2, MPEG-4, H.264, FLV
	Audio format support	MP3, WAV
	Picture format support	JPG/JPEG, BMP, PNG
	Text format support	TEXT
Picture	Picture mode	User/Dynamic/Standard
	Color temperature	User/Cool/Medium/Warm
	Comb filtering	3D
Sound	Sound mode	Standard/Music/Movie/ Sports/User
	Mute	Yes
	Stereo sound	Yes

POWER MGT (ALL MODELS)

Size	43"
Power input	100V-240V AC 60/50Hz
Working consumption	≤110W
Standby consumption	≤0.5W (auto wake up off model)
Audio power	10Wx2

ACCESSORY (ALL MODELS)

Power Cable	1PCS
HDMI Cable	1PCS
IR Remote Control	1PCS
AAA Batteries	1PCS
Screws for Mounting Monitor	1PCS
Screws for Installing Monitor Stand	1PCS
Base of Stands	1PCS
User's Manual	1PCS

BEZEL SIZE/MM

Model	Left	Right	Top	Bottom
OE-43MON1080		0.58" (14.9mm)		0.8" (20mm)

SAFETY & CERTIFICATION (ALL MODELS)

Safety (class I)	Withstand voltage strength	2.5KV DC/60s
	Leakage current	≤3.5mA (264V AC/60s)
	Earthing protective resistance	≤100mΩ (25A DC/20s)
Authentication		CE/FCC/ROHS/HDMI/UL/WEEE/REACH
Remote control area		≥8m straight line ≥7m horizontal 330° and vertical 315°
Environment	Working condition	Temperature: 32°F-104°F (0°C-40°C) Humidity: 10%-90% Atmosphere: 86KPa-104KPa
	Storage condition manual	Temperature: -4°F-122°F (-20°C-50°C) Humidity: 5%-95% Atmosphere: 86KPa-104KPa


FOR MORE INFORMATION, CONTACT YOUR ADI SALES PERSON.

HIGH BRIGHTNESS LED SEMI COMMERCIAL MONITOR

16/7/365 Operating Capability



MOUNTING ON THE WALL

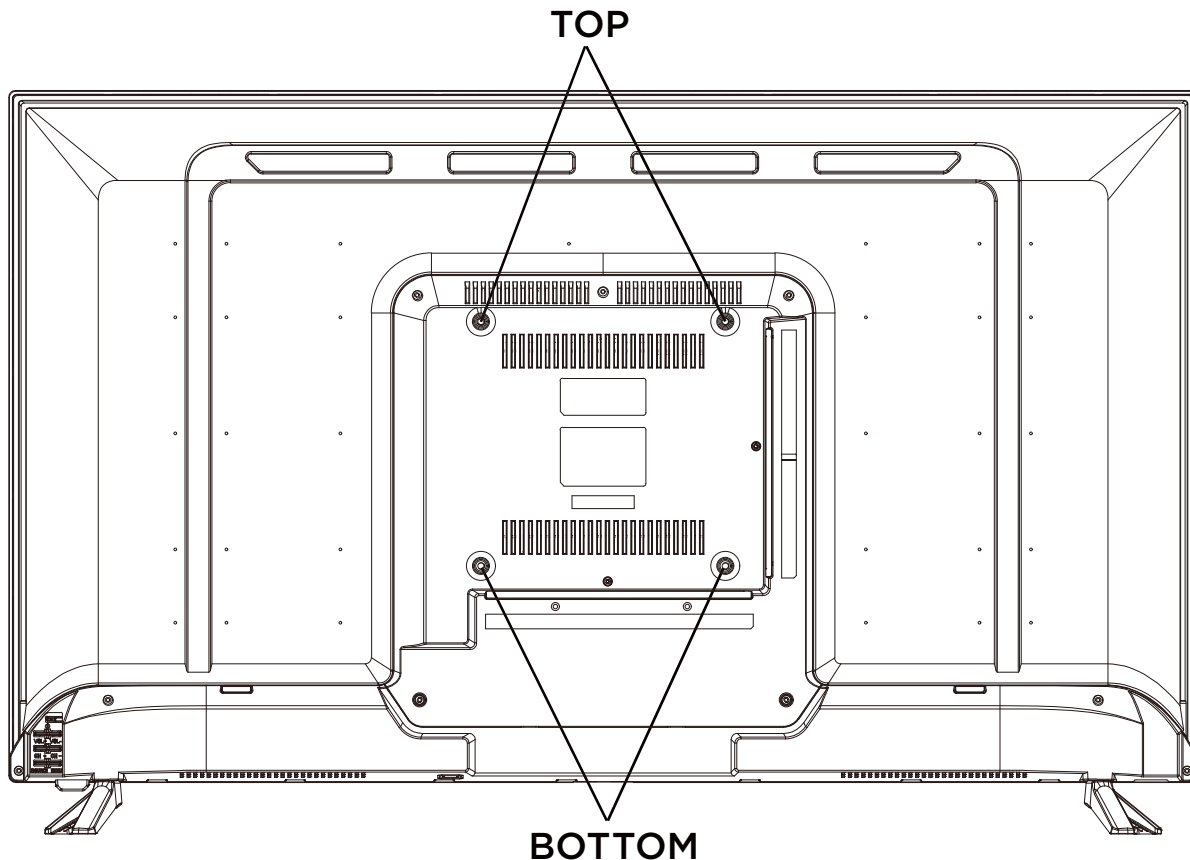

VESA MOUNTING

Model	Mounting Dimension	TOP	BOTTOM
OE-43MON1080	7.9" x 7.9" (200mm x 200mm)	HM6.0 x 14mm	HM6.0 x 14mm

* HARDWARE INCLUDED IN MONITOR BOX *


FOR MORE INFORMATION, CONTACT YOUR ADI SALES PERSON.

HIGH BRIGHTNESS LED SEMI COMMERCIAL MONITOR

16/7/365 Operating Capability





Connecting power supply

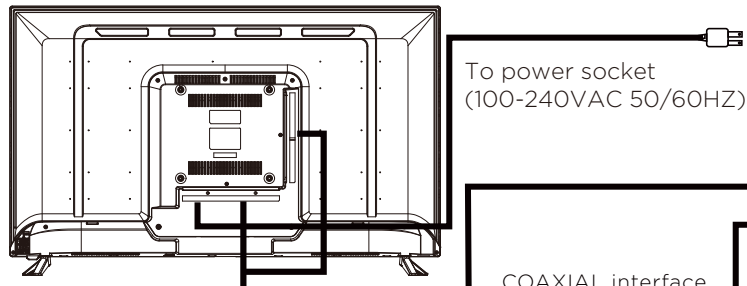


HDMI input connection

Connect to devices with HDMI output interface DVR/NVR




Connect to devices with COAXIAL interface

COAXIAL input connection

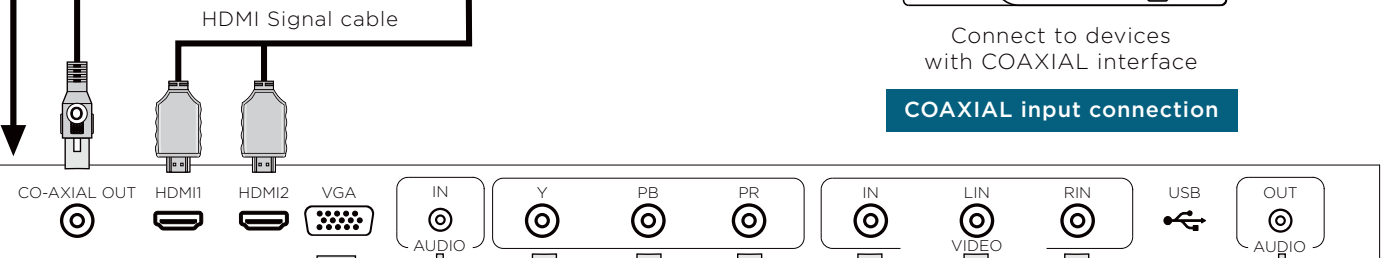

Component input connection

Connect to devices with VGA output interface




VGA input connection

AUDIO Out input connection


Y/PB/PR connection

Connect to devices with Y/PB/PR output



VIDEO connection

Connect to devices with VIDEO output



Coaxial Cable

Coaxial-out connection

Connect to audio devices with coaxial interface

