

eFlowNADV Series

Power Supply/Chargers with Multi-Output Access Power Controllers



Altronix eFlowNADV series distribute and switch power to access control systems and accessories. They convert a 220VAC (working range 198VAC - 256VAC), 50/60Hz input into eight (8) independently controlled 12VDC or 24VDC PTC protected outputs. Outputs are activated by an open collector sink or normally open (NO) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. Units will route power to a variety of access control hardware devices including: Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the eight (8) outputs.



eFlow6NA8DV

Key Features

- Eight (8) independently controlled Fail-Safe and/or Fail-Secure power outputs
- Eight (8) auxiliary power outputs (unswitched)
- Output PTCs are rated @ 2.5A
- Filtered and electronically regulated outputs
- Supervision:
 - AC Fail.
 - Battery Fail and Battery Presence
 - Low power shutdown
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the eight (8) outputs
- Alarm output relay indicates that FACP input is triggered
- Fire Alarm disconnect input options:
 - a) Normally open (NO) or normally closed (NC) dry contact input
 - b) Polarity reversal input from FACP signaling circuit
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- CE European Conformity
- Lifetime Warranty

eFlowNADV Series Power Supply Configuration Reference Chart

Altronix Model Number	220VAC 50/60 Hz Input Current (A)	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating	Maximum Supply Current for Main and Aux. Outputs (A)		PTC Protected Power-Limited Outputs (auto-resettable)	Current per ACM8CB output (A)	ACM8CB Board Input Fuse Rating	ACM8CB Board Output PTC Rating
				12VDC	24VDC				
eFlow4NA8DV	2.1A	5A/250V	7.5A/32V	3.3A	3.6A	8	2.5A	10A/250V	2.5A
eFlow6NA8DV	2.1A	5A/250V	10A/32V	5.3A	5.6A	8	2.5A	10A/250V	2.5A
eFlow102NA8DV	2.1A	5A/250V	15A/32V	9.3A	—	8	2.5A	10A/250V	2.5A
eFlow104NA8DV	2.7A	6.3A/250V	15A/32V	—	9.6A	8	2.5A	10A/250V	2.5A

Lifetime Warranty

Specifications

Input

Voltage 220VAC (working range 198VAC - 256VAC), 50/60Hz
 Fusing Varies, see Reference Chart

Outputs

Voltage 12VDC or 24VDC, see Reference Chart
 Current Varies, depending on the model
 Protection PTC 2.5A
 Auxiliary 2.5A (unswitched)
 Other Overvoltage protection
 Filtered and regulated outputs

Battery Charging

Capacity 12AH/12VDC (1 or 2 within enclosure)
 40AH/65AH (requires separate enclosure)
 Type Sealed lead acid or gel type
 Fuse Rating Varies, see Reference Chart
 Failover Upon AC loss, instantaneous
 Batteries are sold separately

Fire Alarm Disconnect

Supervised Latching or non-latching, individually selectable for any or all of the eight (8) outputs
 EOL 10K Resistor

Supervision

AC Failure Form "C" contacts
 Battery Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

Indicators (LED)

Input 220VAC is present
 DC Output Powered
 Relays Individual LEDs indicate outputs are triggered (relays energized)
 FACP Indicates FACP disconnect is triggered

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure: 15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)
 Shipping: 16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.5mm)

Product Weight / Shipping (approx.)

Model	Product Weight	Shipping Weight
eFlow4NA8DV	8.65 lb. (3.92 kg)	9.95 lb. (4.51 kg)
eFlow6NA8DV	8.6 lb. (3.9 kg)	9.9 lb. (4.49 kg)
eFlow102NA8DV	8.65 lb. (3.92 kg)	9.95 lb. (4.51 kg)
eFlow104NA8DV	8.9 lb. (4.04 kg)	10.2 lb. (4.63 kg)

Temperature


Operating: 0°C to 49°C (32°F to 120°F)
 Storage: -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr. (12VDC/24VDC, approx.):

Model	12VDC	24VDC
eFlow4NA8DV	25	50
eFlow6NA8DV	37	74
eFlow102NA8DV	61	N/A
eFlow104NA8DV	N/A	123

Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email




Lifetime Warranty

Dimensions and Drawing

Dimensions (H x W x D approximate)

15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

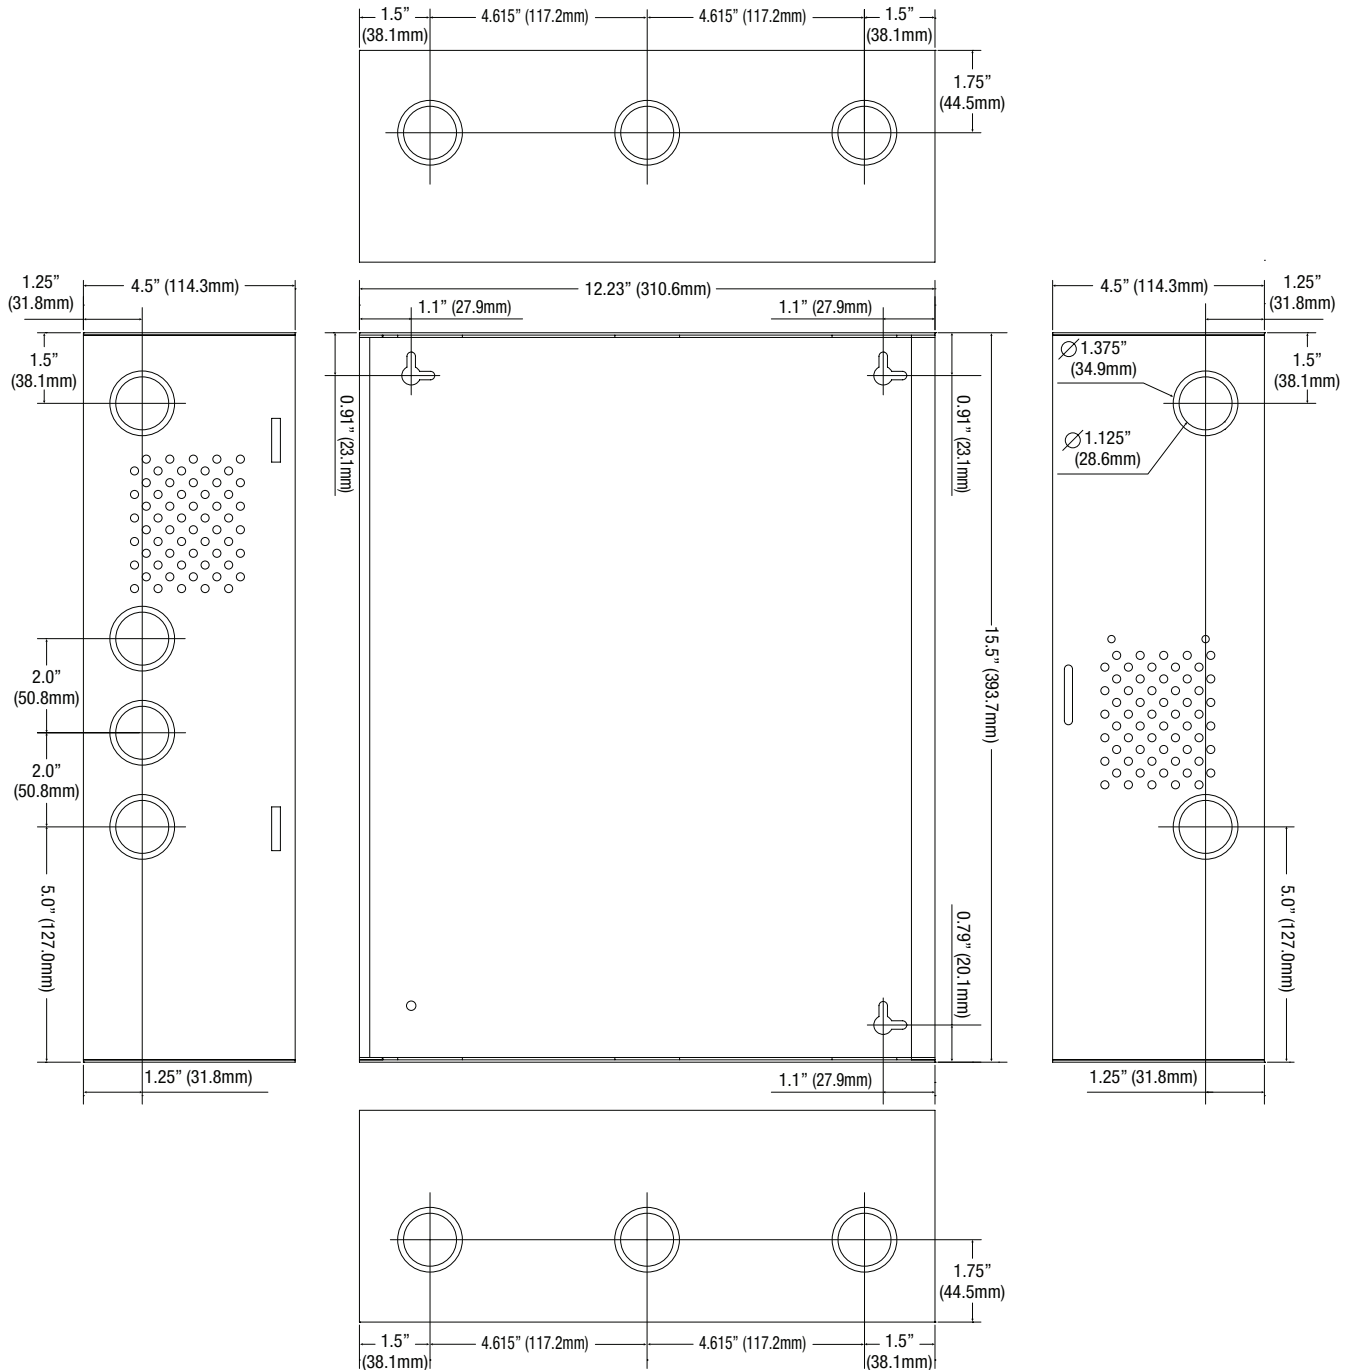

Lifetime Warranty