CEILING MOUNT PASSIVE INFRARED MOTION SENSOR (360°)



The Ceiling Mount Passive Infrared Motion Sensor is designed to be mounted in smallto medium-sized rooms between 8' and 12' high. Optimal performance is achieved when the detector is mounted on the ceiling in the center of the area requiring protection. While a single ceiling mount sensor is ideal for sensing motion in rooms up to 30' x 30', multiple detectors are recommended when protecting larger areas like classrooms, meeting rooms, public lobbies and storage areas.



Product Specifications

PART #: 0E-PIRCM **UPC:** 811914024095

Coverage Pattern Diameter: Up to 36' (11m)

Look-Down Capability: 360°

Mounting Height: 8' to 12' (2.4-3.7m)

Power: 17mA @ 12VDC

Dimensions: @3.5" x 1" (@8.89 x 2.54cm)

Operating Temperature: 32°F to 122°F (0° to 50°C)

Relative Humidity: Up to 95% (max), non-condensing



Approval listing UL639 Intrusion Detection Unit For more information, contact your ADI salesperson or visit adiglobal.com/adiexclusivebrands

FEATURES

Ideal protection for rooms up to 30' x 30' (9m)

Twist-off cover for easy removal

Tampered front cover


Ceiling mount helps prevent accidental damage or vandalism

Compact, discreet size


5-Year Warranty

WALL MOUNT PASSIVE INFRARED MOTION SENSOR (360°)

Top View

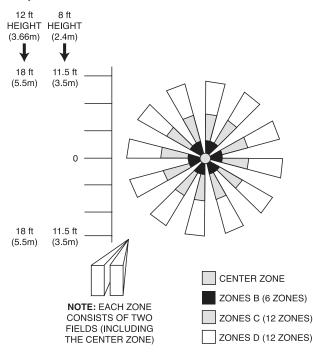

Side View

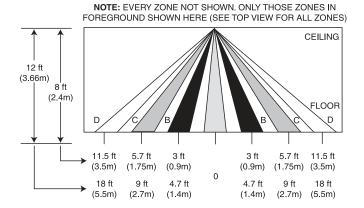

0E-PIRCM

For more information contact your ADI salesperson or visit adiglobal.com/adiexclusivebrands

