# WALL MOUNT PASSIVE INFRARED MOTION SENSOR



Ideal for all residential applications, the ADI PRO Wall Mount Passive Infrared Motion Sensor delivers exceptional value and performance while reducing false alarms. Installations are quick and easy—saving you time and money. The motion detector features selectable pet immunity for animals weighing up to 40 pounds, an always-enabled LED, 35' x 40' range and a style that blends with any decor.



**Sealed Optics:** Sealed optical chamber prevents drafts and insects from affecting the detector

**Uniform Sensitivity Optics:** Fresnel lens provides a consistent level of detection – delivering optimal performance no matter the distance

**Superior Detection and False Alarm Immunity:** Provides superior protection against false alarms without sacrificing catch performance

**Pet-friendly Selectivity:** Enable pet immunity to distinguish between signals caused by humans while ignoring pets up to 40 lbs.

**Flexible Mounting:** Mounts on walls or in corners, at heights from 7' to 9' (2.1m–2.7m)

5-Year Warranty



## **Product Specifications**

**PART #:** 0E-PIRWM **UPC:** 811914024101

**Range:** 35' x 40' (10.6m x 12.2m)

**Mounting Height:** 7' to 9' (2.1m-2.7m)

**Power:** 9.0 - 15VDC; 7mA typical, 12mA maximum; AC Ripple: 3V peak-to-peak at nominal 12VDC

**Alarm Relay:** Energized Form A; 90mA, 15 VDC, 22 Ohms resistance maximum Alarm Relay Duration: 3 seconds

**Dimensions (H x W x D):** 3.39" x 2.24"x 1.71" (8.6cm x 5.7cm x 4.35cm)

**Net Weight:** 2.15oz / 61g

Pet Immunity: ≤ 40lbs. / 18kg





For more information, contact your ADI salesperson or visit adiglobal.com/adiexclusivebrands

## WALL MOUNT PASSIVE INFRARED MOTION SENSOR


## **ADDITIONAL SPECIFICATIONS**

**RFI Immunity:** 20V/m 10-1000MHz, 15V/m 1000-2700MHz

**Operating Temperature:** 14°F to 131°F (-10°C to 55°C)

Relative Humidity: 5% to 93% non-condensing

### **Detection Pattern**

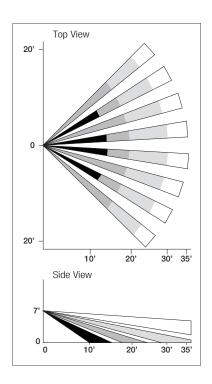

Pet Immune Lens Coverage Pattern

### **Approval Listings**

- FCC PART 15, CLASS B VERIFIED
- IC ICES-003, CLASS B VERIFIED
- ETL LISTED TO UL 639
- CETL LISTED TO ULC \$306

