AV BEYOND THE BOX

Kramer Connect

Cables, Adapters, Connectors, Table Boxes, Inserts, Wall Plates, AV Tools, and More

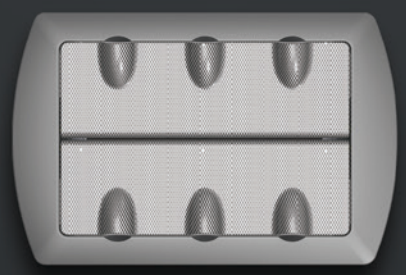

KramerAV.com

Cables & Adapters

Cable Assemblies

HDMI™

C-HMU
Ultra High–Speed HDMI Cable with Ethernet

C-HMU-3	0,9 m	8K@60 Hz
C-HMU-6	1,8 m	8K@60 Hz
C-HMU-9	2.7 m	8K@60 Hz

C-HM/HM
High–Speed HDMI Cable

C-HM/HM-3	0,9 m	4K@60 Hz (4:4:4)
C-HM/HM-6	1,8 m	4K@60 Hz (4:4:4)
C-HM/HM-10	3,0 m	4K@60 Hz (4:4:4)
C-HM/HM-15	4,6 m	4K@60 Hz (4:4:4)
C-HM/HM-25	7,6 m	1080p@60 Hz 36 bit
C-HM/HM-35	10,6 m	1080p@60 Hz 36 bit
C-HM/HM-50	15,2 m	1080p@60 Hz

C-HM/HM/ETH
High–Speed HDMI Cable with Ethernet

C-HM/HM/ETH-3	0,9 m	4K@60 Hz (4:4:4)
C-HM/HM/ETH-6	1,8 m	4K@60 Hz (4:4:4)
C-HM/HM/ETH-10	3,0 m	4K@60 Hz (4:4:4)
C-HM/HM/ETH-15	4,6 m	4K@60 Hz (4:4:4)
C-HM/HM/ETH-25	7,6 m	4K@60 Hz (4:2:0)
C-HM/HM/ETH-35	10,6 m	4K@60 Hz (4:2:0)
C-HM/HM/ETH-50	15,2 m	1080p@60 Hz

HDMI

CLS-HM/HM/ETH
High–Speed HDMI Cable with Ethernet — Low Smoke & Halogen Free

CLS–HM/HM/ETH–3	0.9 m	4K@60Hz (4:4:4)
CLS–HM/HM/ETH–6	1.8 m	4K@60Hz (4:4:4)
CLS–HM/HM/ETH–10	3.0 m	4K@60Hz (4:4:4)
CLS–HM/HM/ETH–15	4.6 m	4K@60Hz (4:4:4)
CLS–HM/HM/ETH–25	7.6 m	4K@60Hz (4:2:0)
CLS–HM/HM/ETH–35	10.7 m	4K@60Hz (4:2:0)
CLS–HM/HM/ETH–50	15.2 m	1080p@60Hz

CP-HM/HM/ETH
Only in N. America

High–Speed HDMI Cable with Ethernet — Plenum Rated

CP–HM/HM/ETH–15	4.6 m	4K@60Hz (4:4:4)
CP–HM/HM/ETH–25	7.6 m	4K@60Hz (4:2:0)
CP–HM/HM/ETH–35	10.7 m	4K@60Hz (4:2:0)
CP–HM/HM/ETH–40	12.0 m	4K@60Hz (4:2:0)
CP–HM/HM/ETH–45	13.7 m	4K@60Hz (4:2:0)
CP–HM/HM/ETH–50	15.2 m	1080p@60Hz 12-bit

C-HM/HM/PRO
Premium / High–Speed HDMI Cable with Ethernet

C-HM/HM/PRO-3	0,9 m	4K@60 Hz (4:4:4)
C-HM/HM/PRO-6	1,8 m	4K@60 Hz (4:4:4)
C-HM/HM/PRO-10	3,0 m	4K@60 Hz (4:4:4)
C-HM/HM/PRO-15	4,6 m	4K@60 Hz (4:4:4)
C-HM/HM/PRO-20	6,1 m	4K@60 Hz (4:4:4)
C-HM/HM/PRO-25	7,6 m	4K@60 Hz (4:2:0)
C-HM/HM/PRO-35	10,6 m	4K@60 Hz (4:2:0)
C-HM/HM/PRO-40	12 m	4K@60 Hz (4:2:0)
C-HM/HM/PRO-50	15,2 m	1080p@60 Hz 36 bit
C-HM/HM/PRO-65	19,5 m	1080p@60 Hz

HDMI

C-MHM/MHM
Flexible High–Speed HDMI Cable with Ethernet

C-MHM/MHM-1	0,3 m	4K@60 Hz (4:4:4)
C-MHM/MHM-2	0,6 m	4K@60 Hz (4:4:4)
C-MHM/MHM-3	0,9 m	4K@60 Hz (4:4:4)
C-MHM/MHM-6	1,8 m	4K@60 Hz (4:4:4)
C-MHM/MHM-10	3,0 m	4K@60 Hz (4:4:4)
C-MHM/MHM-15	4,6 m	4K@60 Hz (4:4:4)
C-MHM/MHM-25	7,6 m	4K@60 Hz (4:2:0)
C-MHM/MHM-35	10.70m	4K@60Hz (4:2:0)
C-MHM/MHM(W)-1	0.30m	4K@60Hz (4:4:4)
C-MHM/MHM(W)-2	0.60m	4K@60Hz (4:4:4)
C-MHM/MHM(W)-3	0.90m	4K@60Hz (4:4:4)
C-MHM/MHM(W)-6	1.80m	4K@60Hz (4:4:4)
C-MHM/MHM(W)-10	3.00m	4K@60Hz (4:4:4)
C-MHM/MHM(W)-15	4.60m	4K@60Hz (4:4:4)
C-MHM/MHM(W)-25	7.60m	4K@60Hz (4:2:0)
C-MHM/MHM(W)-35	10.70m	4K@60Hz (4:2:0)

C-MHMA/MHMA
Flexible High–Speed HDMI Cable with Ethernet & 3.5mm Stereo Audio

C–MHMA/MHMA–3	0.9 m	4K@60Hz (4:4:4)
C–MHMA/MHMA–6	1.8 m	4K@60Hz (4:4:4)
C–MHMA/MHMA–10	3.0 m	4K@60Hz (4:4:4)
C–MHMA/MHMA–15	4.6 m	4K@60Hz (4:4:4)
C–MHMA/MHMA–25	7.6 m	4K@60Hz (4:2:0)

C-HM/HM/PICO
Ultra–Slim Flexible High–Speed HDMI Cable with Ethernet

C-HM/HM/PICO/BK-1	0,3 m	4K@60 Hz (4:4:4)
C-HM/HM/PICO/BK-2	0,6 m	4K@60 Hz (4:4:4)
C-HM/HM/PICO/BK-3	0,9 m	4K@60 Hz (4:4:4)
C-HM/HM/PICO/BK-6	1,8 m	4K@60 Hz (4:4:4)
C-HM/HM/PICO/BK-10	3,0 m	4K@60 Hz (4:2:0)
C-HM/HM/PICO/WH-3	0,9 m	4K@60 Hz (4:4:4)
C-HM/HM/PICO/WH-6	1,8 m	4K@60 Hz (4:4:4)
C-HM/HM/PICO/WH-10	3,0 m	4K@60 Hz (4:2:0)
Adapter Cable HDMI-HDMI		
ADC-HM/HF/PICO	0,3 m	4K@60H Hz (4:4:4)
C-HM/HM/PICO/BK-5	1,5 m	4K@60H Hz (4:4:4)

Available Colors — Black, green, yellow, orange, red and pink.

HDMI

C-HM/HM/FLAT/ETH
Flat High–Speed HDMI Cable with Ethernet

C-HM/HM/FLAT/ETH-3	0,9 m	4K@60 Hz (4:4:4)
C-HM/HM/FLAT/ETH-6	1,8 m	4K@60 Hz (4:4:4)
C-HM/HM/FLAT/ETH-10	3,0 m	4K@60 Hz (4:4:4)
C-HM/HM/FLAT/ETH-15	4,6 m	4K@60 Hz (4:2:0)
C-HM/HM/FLAT/ETH-25	7,6 m	4K@60 Hz (4:2:0)
C-HM/HM/FLAT/ETH-35	10,6 m	4K@60 Hz (4:2:0)
C-HM/HM/FLAT/ETH-50	15,2 m	1080p@60Hz 12-Bit
C-HM/HM/FLAT/ETH-75	22,9 m	1080p@60 Hz*

C-HM/EEP
High–Speed HDMI Cable with Ethernet with Enhanced EMI Protection

C–HM/EEP	3 0.90m	4K@60Hz (4:4:4)
C–HM/EEP	6 1.80m	4K@60Hz (4:4:4)
C–HM/EEP	10 3.00m	4K@60Hz (4:4:4)

C-HM/RA
High-Speed HDMI Right Angle Cable with Ethernet

C-HM/RA-3	0.9 m	4K@60Hz (4:4:4)
C-HM/RA-6	1.8 m	4K@60Hz (4:4:4)
C-HM/RA-10	3 m	4K@60Hz (4:4:4)
C-HM/RA-15	4.6 m	4K@60Hz (4:4:4)

Cable Assemblies

HDMI

C-HM/RA-2
High–Speed HDMI with Ethernet to Micro HDMI Cable

C-HM/RA2-3	0.9 m	4K@60Hz (4:4:4)
C-HM/RA2-6	1.8 m	4K@60Hz (4:4:4)

C-HM/HM/A-C
High–Speed HDMI with Ethernet to Mini HDMI Cable

C-HM/HM/A-C-3	0,9 m	4K@60 Hz (4:4:4)
C-HM/HM/A-C-6	1,8 m	4K@60 Hz (4:2:0)
C-HM/HM/A-C-10	3,0 m	4K@60 Hz (4:2:0)

C-HM/HM/A-D
High–Speed HDMI with Ethernet to Micro HDMI Cable

C-HM/HM/A-D-3	0,9 m	4K@60 Hz (4:4:4)
C-HM/HM/A-D-6	1,8 m	4K@60 Hz (4:2:0)
C-HM/HM/A-D-10	3,0 m	4K@60 Hz (4:2:0)

HDMI

CA-HM
Active High Speed HDMI Cable with Ethernet

CA-HM-15	4,6 m	4K/60 Hz (4:4:4)
CA-HM-25	7,6 m	4K/60 Hz (4:4:4)
CA-HM-35	10,6 m	4K/60 Hz (4:4:4)
CA-HM-50	15,2 m	4K/60 Hz (4:4:4)
CA-HM-66	20 m	4K/60 Hz (4:4:4)
CA-HM-82	25 m	4K/60 Hz (4:2:0)
CA-HM-98	30 m	4K/60 Hz (4:2:0)

CLS-AOCH/60F
Active Optical 4K HDMI Cable — Low Smoke & Halogen Free

CLS-AOCH-33	10 m	4K@60 Hz (4:4:4)
CLS-AOCH-50	15,2 m	4K@60 Hz (4:4:4)
CLS-AOCH-66	20 m	4K@60 Hz (4:4:4)
CLS-AOCH-98	30 m	4K@60 Hz (4:4:4)
CLS-AOCH-131	40 m	4K@60 Hz (4:4:4)
CLS-AOCH-164	50 m	4K@60 Hz (4:4:4)
CLS-AOCH-197	60 m	4K@60 Hz (4:4:4)
CLS-AOCH-230	70 m	4K@60 Hz (4:4:4)
CLS-AOCH-262	80 m	4K@60 Hz (4:4:4)
CLS-AOCH-295	90 m	4K@60 Hz (4:4:4)

CP-AOCH/60F
Only in N. America

Active Optical 4K HDMI Cable — Plenum Rated

CP–AOCH–33	10 m	4K@60Hz (4:4:4)
CP–AOCH–50	15,2 m	4K@60Hz (4:4:4)
CP–AOCH–66	20 m	4K@60Hz (4:4:4)
CP–AOCH–98	30 m	4K@60Hz (4:4:4)
CP–AOCH–131	40 m	4K@60Hz (4:4:4)
CP–AOCH–164	50 m	4K@60Hz (4:4:4)
CP–AOCH–197	60 m	4K@60Hz (4:4:4)
CP–AOCH–230	70 m	4K@60Hz (4:4:4)
CP–AOCH–262	80 m	4K@60Hz (4:4:4)
CP–AOCH–295	90 m	4K@60Hz (4:4:4)

HDMI

CLS-AOCH/UF
Ultra High–Speed HDMI Optic Hybrid Cable — Low Smoke & Halogen Free

CLS-AOCH/UF-33	10 m	8K@60 Hz
CLS-AOCH/UF-50	15,2 m	8K@60 Hz
CLS-AOCH/UF-66	20 m	8K@60 Hz
CLS-AOCH/UF98	30 m	8K@60 Hz

CP-AOCH/UF
Only in N. America

Ultra High–Speed HDMI Optic Hybrid Cable — Plenum Rated

CP–AOCH/UF–33	10 m	8K@60Hz (4:2:0)
CP–AOCH/UF–50	15,2 m	8K@60Hz (4:2:0)
CP–AOCH/UF–66	20 m	8K@60Hz (4:2:0)
CP–AOCH/UF–98	30 m	8K@60Hz (4:2:0)

CLS-AOCH/60
Active Optical 4K Pluggable HDMI Cable — Low Smoke & Halogen Free

CLS-AOCH/60-33	10 m	4K@60 Hz (4:4:4)
CLS-AOCH/60-50	15,2 m	4K@60 Hz (4:4:4)
CLS-AOCH/60-66	20 m	4K@60 Hz (4:4:4)
CLS-AOCH/60-98	30 m	4K@60 Hz (4:4:4)
CLS-AOCH/60-131	40 m	4K@60 Hz (4:4:4)
CLS-AOCH/60-164	50 m	4K@60 Hz (4:4:4)
CLS-AOCH/60-197	60 m	4K@60 Hz (4:4:4)
CLS-AOCH/60-230	70 m	4K@60 Hz (4:4:4)
CLS-AOCH/60-262	80 m	4K@60 Hz (4:4:4)
CLS-AOCH/60-295	90 m	4K@60 Hz (4:4:4)
CLS-AOCH/60-328	100 m	4K@60 Hz (4:4:4)

HDMI

CP-AOCH/60
Only in N. America

Active Optical 4K Pluggable HDMI Cable — Plenum Rated

CP–AOCH/60–33	10 m	4K@60Hz (4:4:4)
CP–AOCH/60–50	15,2 m	4K@60Hz (4:4:4)
CP–AOCH/60–66	20 m	4K@60Hz (4:4:4)
CP–AOCH/60–98	30 m	4K@60Hz (4:4:4)
CP–AOCH/60–131	40 m	4K@60Hz (4:4:4)
CP–AOCH/60–164	50 m	4K@60Hz (4:4:4)
CP–AOCH/60–197	60 m	4K@60Hz (4:4:4)
CP–AOCH/60–230	70 m	4K@60Hz (4:4:4)
CP–AOCH/60–262	80 m	4K@60Hz (4:4:4)
CP–AOCH/60–295	90 m	4K@60Hz (4:4:4)
CP–AOCH/60–328	100 m	4K@60Hz (4:4:4)

CRS-FIBERH-S1
Only in N. America

Secured Unidirectional HDMI over Pure Fiber Cable

CRS–FIBERH–S1–6	1,8 m	4K@60Hz (4:2:0)
CRS–FIBERH–S1–10	3,0 m	4K@60Hz (4:2:0)
CRS–FIBERH–S1–15	4,6 m	4K@60Hz (4:2:0)
CRS–FIBERH–S1–23	7 m	4K@60Hz (4:2:0)
CRS–FIBERH–S1–33	10 m	4K@60Hz (4:2:0)
CRS–FIBERH–S1–50	15,2 m	4K@60Hz (4:2:0)
CRS–FIBERH–S1–66	20 m	4K@60Hz (4:2:0)
CRS–FIBERH–S1–98	30 m	4K@60Hz (4:2:0)
CRS–FIBERH–S1–131	40 m	4K@60Hz (4:2:0)
CRS–FIBERH–S1–6164	50 m	4K@60Hz (4:2:0)

AD-AOCH/XL/TR
HDMI Adapter Set
for AOCH/XL Cable

AD-AOCH/XL/TR	Up to 4K@60 Hz (4:4:4)

AD-AOCD/XL/TR
DVI Tx&Rx Adapter Set for AOCH/XL
and AOCH/60 Cables

AD-AOCD/XL/TR	DVI

Supported Resolutions — AD–AOCD/XL/TR:
up to 1080p and UXGA (1600X1200 @60Hz)
& WUXGA (1920X1200 @60Hz)

Cable Assemblies

HDMI

AD-AOCH/RA/RX
HDMI Rx R/A Adapter for AOCH/XL and AOCH/60 Cables

AD-AOCH/RA/RX	HDMI

Supported Resolutions: — Up to 4K@60Hz (4:2:0).

CRS-PLUGNVIEW-H
Active Optical Armored 4K HDMI Cable

CRS–PlugNView–H–33	10.00 m	4K@60 (4:4:4)
CRS–PlugNView–H–50	15.20 m	4K@60 (4:4:4)
CRS–PlugNView–H–66	20.00 m	4K@60 (4:4:4)
CRS–PlugNView–H–98	30.00 m	4K@60 (4:4:4)
CRS–PlugNView–H–131	40.00 m	4K@60 (4:4:4)
CRS–PlugNView–H–164	50.00 m	4K@60 (4:4:4)
CRS–PlugNView–H–197	60.00 m	4K@60 (4:4:4)
CRS–PlugNView–H–230	70.00 m	4K@60 (4:4:4)
CRS–PlugNView–H–262	80.00 m	4K@60 (4:4:4)
CRS–PlugNView–H–328	1000.00 m	4K@60 (4:4:4)

CRS-PLUGNVIEW-DP

CRS–PlugNView–DP–33	10,0 m	8K@60Hz
CRS–PlugNView–DP–50	15.20 m	8K@60Hz
CRS–PlugNView–DP–66	20,0 m	8K@60Hz
CRS–PlugNView–DP–98	30,0 m	8K@60Hz
CRS–PlugNView–DP–131	40,0 m	8K@60Hz
CRS–PlugNView–DP–164	50,0 m	8K@60Hz
CRS–PlugNView–DP–197	60,0 m	8K@60Hz
CRS–PlugNView–DP–230	70,0 m	8K@60Hz
CRS–PlugNView–DP–262	80,0 m	8K@60Hz
CRS–PlugNView–DP–295	90,0 m	8K@60Hz
CRS–PlugNView–DP–328	100,0 m	8K@60Hz

HDMI

C-HM/DM
HDMI to DVI Cable

C-HM/DM-3	0,9 m	4K@60 Hz (4:4:4)
C-HM/DM-6	1,8 m	4K@60 Hz (4:4:4)
C-HM/DM-10	3,0 m	4K@60 Hz (4:2:0)
C-HM/DM-15	4,6 m	4K@60 Hz (4:2:0)
C-HM/DM-25	7,6 m	1080p@60 Hz 36 bit
C-HM/DM-35	10,6 m	1080p@60 Hz 36 bit
C-HM/DM-50	15,2 m	1080p@60 Hz

CP-HM/DM
Available in U.S. only

HDMI to DVI Cable — Plenum Rated

CP–HM/DM–25	7.6 m
CP–HM/DM–35	10.7 m
CP–HM/DM–50	15.2 m
CP–HM/DM–65	19.5 m

KVM

C-KVM
KVM Cable

C–KVM/1–6KVM	1.8 m
C–KVM/2–6KVM	1.8 m
C–KVM/3–6KVM	1.8 m

Fiber Optic

C-4LC/4LC
4 LC Fiber Optic Cable



C-4LC/4LC-33	10 m
C-4LC/4LC-66	20 m
C-4LC/4LC-99	30 m
C-4LC/4LC-164	50 m
C-4LC/4LC-200	60 m
C-4LC/4LC-328	100 m
C-4LC/4LC-656	200 m
C-4LC/4LC-984	300 m
C-4LC/4LC-1640	500 m
C-2LC/2LC-33	10 m
C-2LC/2LC-66	20 m
C-2LC/2LC-99	30 m

Fiber Optic

CLS-2LC/OM3
2 LC MM OM3 Fiber Optic Cable — Low Smoke & Halogen Free

CLS–2LC/OM3–33	10.00 m
CLS–2LC/OM3–66	20.00 m
CLS–2LC/OM3–98	30.00 m
CLS–2LC/OM3–164	50.00 m
CLS–2LC/OM3–246	75.00 m
CLS–2LC/OM3–328	100.00 m
CLS–2LC/OM3–558	170.00 m
CLS–2LC/OM3–656	200.00 m

C-SC/SC/OM4
OM4 Multi–Mode Fiber Optic Cable

C-SC/SC/OM4-33	10 m
C-SC/SC/OM4-66	20 m
C-SC/SC/OM4-98	30 m
C-SC/SC/OM4-164	50 m
C-SC/SC/OM4-246	75 m
C-SC/SC/OM4-328	100 m
C-SC/SC/OM4-558	170 m
C-SC/SC/OM4-656	200 m
C-SC/SC/OM4-820	250 m

610R/T
DVI Rx/Tx Extender over Ultra–Reach MM Fiber

Supported Resolutions — 1920x1200@60, Max. Data Rate — 4.95Gbps (1.65Gbps per graphic channel)

602R/T
Detachable DVI Optical Transmitter & Receiver

Max. Resolution — Up to WUXGA (1920x1200) @60Hz, 1080p.

Fiber Optic

614R/T
Single-Fiber Detachable DVI Optical Transmitter & Receiver

612R/T
4K60 4:4:4 DP Transmitter/Receiver over Extended–Reach MM Fiber Optic

Supported Resolutions — 4K@60(4:4:4)

617R/T
4K HDR HDMI Transmitter/Receiver over Extended–Reach MM Fiber Optic

Supported Resolutions — 4K@60(4:4:4)

613R/T
3G SDI Rx/Tx Extender over Ultra–Reach SM Fiber

Max. Resolution — Up to WUXGA @60Hz (1.65Gbps)
Max. Data Rate — Up to 3Gbps

Cable Assemblies

U/FTP CAT6

C-UNIKAT
CAT6A U/FTP Video & LAN Cable Assembly

C-UNIKat-2	0,6 m
C-UNIKat-3	0,9 m
C-UNIKat-6	1,8 m
C-UNIKat-10	3,0 m
C-UNIKat-15	4,6 m
C-UNIKat-25	7,6 m
C-UNIKat-35	10,6 m
C-UNIKat-50	15,2 m
C-UNIKat-75	22,9 m
C-UNIKat-100	30,5 m
C-UNIKat-125	38,1 m
C-UNIKat-150	45,7 m
C-UNIKat-164	50,0 m
C-UNIKat-200	60,0 m
C-UNIKat-230	70,0 m
C-UNIKat-328	100,0 m

PC6A-LS508
CAT6 UTP 250MHz CM 4x2x24AWG Patch Cord

PC6A-LS508-0.15M	0.15 m
PC6A-LS508-0.3M	0.3 m
PC6A-LS508-0.5M	0.5 m
PC6A-LS508-1M	1.0 m
PC6A-LS508-2M	2.0 m
PC6A-LS508-3M	3.0 m
PC6A-LS508-4M	4.0 m
PC6A-LS508-5M	5.0 m
PC6A-LS508-7M	20.0 m
PC6A-LS508-10M	10.0 m
PC6A-LS508-15M	15.0 m
PC6A-LS508-30M	30 m

PC6-1
CAT6 UTP 250MHz CM 4x2x24AWG Patch Cord

PC6–108–0.5	0.15 m
PC6–108–1	0.30 m
PC6–108–3	0.90 m
PC6–108–5	1.50 m
PC6–108–7	2.00 m
PC6–108–10	3.00 m
PC6–108–15	4.60 m

DisplayPort

C-DPU
8K DisplayPort Cable

C-DPU-3	0,9 m	8K@60 Hz
C-DPU-6	1,8 m	8K@60 Hz
C-DPU-10	3,0 m	8K@60 Hz

DisplayPort

C-DP
4K DisplayPort Cable

C-DP-3	0,9 m	4K@60 Hz (4:4:4)
C-DP-6	1,8 m	4K@60 Hz (4:4:4)
C-DP-10	3,0 m	4K@60 Hz (4:4:4)
C-DP-15	4,6 m	4K@60 Hz (4:4:4)
C-DP-25	7,6 m	4K@60 Hz (4:4:4)
C-DP-35	10,6 m	4K@60 Hz (4:2:0)
C-DP-50	15,2 m	1080p@60

CLS-AOCDP/UF
Active Optical DisplayPort Cable-Low Somke Halogen Free

CLS–AOCDP/UF–33	10.0 m	8K@60 Hz (4:4:4)
CLS–AOCDP/UF–50	15.2 m	8K@60 Hz (4:4:4)
CLS–AOCDP/UF–66	20.0 m	8K@60 Hz (4:4:4)
CLS–AOCDP/UF–98	30.0 m	8K@60 Hz (4:4:4)
CLS–AOCDP/UF–131	40.0 m	8K@60 Hz (4:4:4)
CLS–AOCDP/UF–164	50.0 m	8K@60 Hz (4:4:4)
CLS–AOCDP/UF–197	60.0 m	8K@60 Hz (4:4:4)
CLS–AOCDP/UF–230	70.0 m	8K@60 Hz (4:4:4)
CLS–AOCDP/UF–262	80.0 m	8K@60 Hz (4:4:4)
CLS–AOCDP/UF–295	90.0 m	8K@60 Hz (4:4:4)
CLS–AOCDP/UF–328	100.0 m	8K@60 Hz (4:4:4)

CP-AOCDP/UF
Active Optical DisplayPort Cable-Plenum rated

CP–AOCDP/UF–33	10 m	8K@60 Hz (4:4:4)
CP–AOCDP/UF–50	15m	8K@60 Hz (4:4:4)
CP–AOCDP/UF–66	20 m	8K@60 Hz (4:4:4)
CP–AOCDP/UF–98	30 m	8K@60 Hz (4:4:4)
CP–AOCDP/UF–131	40 m	8K@60 Hz (4:4:4)
CP–AOCDP/UF–164	50 m	8K@60 Hz (4:4:4)
CP–AOCDP/UF–197	60 m	8K@60 Hz (4:4:4)
CP–AOCDP/UF–230	70 m	8K@60 Hz (4:4:4)
CP–AOCDP/UF–262	80m	8K@60 Hz (4:4:4)
CP–AOCDP/UF–295	90m	8K@60 Hz (4:4:4)
CP–AOCDP/UF–328	100 m	8K@60 Hz (4:4:4)

C-MDPM/MDPM
Flexible DisplayPort Cable

C-MDPM/MDPM-1	0,3 m	4K@60 Hz (4:4:4)
C-MDPM/MDPM-2	0,6 m	4K@60 Hz (4:4:4)
C-MDPM/MDPM-3	0,9 m	4K@60 Hz (4:4:4)
C-MDPM/MDPM-6	1,8 m	4K@60 Hz (4:4:4)
C-MDPM/MDPM-10	3,0 m	4K@60 Hz (4:4:4)
C-MDPM/MDPM-15	4,6 m	4K@60 Hz (4:2:0)
C-MDPM/MDPM-25	7,6 m	1080p@60Hz 12-bit

DisplayPort

C-MDP/DPM
Mini DisplayPort to DisplayPort Cable

C-MDP/DPM-3	0,9 m	4K@60 Hz (4:4:4)
C-MDP/DPM-6	1,8 m	4K@60 Hz (4:4:4)

C-DPM/HM
DisplayPort to HDMI Cable

C-DPM/HM-3	0,9 m	1080p@60
C-DPM/HM-6	1,8 m	1080p@60
C-DPM/HM-10	3,0 m	1080p@60
C-DPM/HM-15	4,6 m	1080p@60

C-DPM/HM/UHD
DisplayPort (M) to HDMI (M) 4K Active Cable

C-DPM/HM/UHD-3	0,9 m	4K@60 Hz (4:4:4)
C-DPM/HM/UHD-6	1,8 m	4K@60 Hz (4:4:4)
C-DPM/HM/UHD-10	3,0 m	4K@60 Hz (4:4:4)

C-MDP/HM
Mini DisplayPort to HDMI Cable

C-MDP/HM-3	0,9 m	1080p@60
C-MDP/HM-6	1,8 m	1080p@60
C-MDP/HM-15	4,6 m	1080p@60
C-MDP/HM-25	7,6 m	1080p@60

IR

C-MDP/HM/UHD
Mini DisplayPort (M) to HDMI (M) 4K Active Cable

C-MDP/HM/UHD-3	0,9 m	4K@60 Hz (4:4:4)
C-MDP/HM/UHD-6	1,8 m	4K@60 Hz (4:4:4)
C-MDP/HM/UHD-10	3,0 m	4K@60 Hz (4:4:4)

C-A35M/IRE

C-A35M/IRE-10 (Single)	3,0 m
C-A35M/2IRE-10 (Dual)	3,0 m

C-A35M/A35F
3.5mm IR or Mono Audio Extension Cable

C-A35M/A35F-50	15,2 m
C-A35M/A35F-65	20,0 m

C-A35M/IRRW
3.5mm Male to Wide–Hz–Range IR Receiver Cable

C-A35M/IRRW	0.90 m

Cable Assemblies

USB 2.0

C-USB/AA
USB 2.0 A (M) to A (M) Cable

C-USB/AA-3	0,9 m
C-USB/AA-6	1,8 m
C-USB/AA-10	3,0 m
C-USB/AA-15	4,6 m

C-USB/AAE
USB 2.0 A (M) to A (F) Extension Cable

C-USB/AAE-1	0,3 m
C-USB/AAE-3	0,9 m
C-USB/AAE-6	1,8 m
C-USB/AAE-10	3,0 m
C-USB/AAE-15	4,6 m

C-USB/AB
USB 2.0 A (M) to B (M) Cable

C-USB/AB-3	0,9 m
C-USB/AB-6	1,8 m
C-USB/AB-10	3,0 m
C-USB/AB-15	4,6 m

C-USB/MINI5
USB 2.0 A (M) to Mini–B 4–pin (M) Cable

C-USB/Mini5-3	0,9 m
C-USB/Mini5-6	1,8 m
C-USB/Mini5-10	3,0 m
C-USB/Mini5-15	4,6 m

USB 2.0

C-USB/MICROB
USB 2.0 A (M) to Micro–B (M) Cable

C-USB/MicroB-3	0,9 m
C-USB/MicroB-6	1,8 m
C-USB/MicroB-10	3,0 m
C-USB/MicroB-15	4,6 m

CA-UAM/UAF
USB Active Extender Cable

CA-UAM/UAF-15	4,6 m
CA-UAM/UAF-25	7,6 m
CA-UAM/UAF-35	10,7 m
CA-UAM/UAF-50	15,2 m
CA-UAM/UAF-65	19,5 m

CPA-UAM/UAF
USB Active Extender Cable — Plenum Rated

CPA–UAM/UAF–25	7.6 m
CPA–UAM/UAF–35	10.7 m
CPA–UAM/UAF–50	15.2 m
CPA–UAM/UAF–65	19.5 m

C-UA/LTN
Apple Certified Lightning to USB Sync & Charge Cable

C-UA/LTN/BK-3	0,9 m
C-UA/LTN/BK-6	1,8 m
C-UA/LTN/WH-3	0,9 m
C-UA/LTN/WH-6	1,8 m

USB 3.0

CA-USB3/AAE
Apple Certified Lightning to USB Sync & Charge Cable

CA-USB3/AAE-15	4.6m
CA-USB3/AAE-25	7.6m
CA-USB3/AAE-35	10.6m
CA-USB3/AAE-50	15.2m

C-USB3/AA
USB 3.0 A (M) to A (M) Cable

C-USB3/AA-3	0,9 m
C-USB3/AA-6	1,8 m

C-USB3/AAE
USB 3.0 A (M) to A (F) Extension Cable

C-USB3/AAE-3	0,9 m
C-USB3/AAE-6	1,8 m
C-USB3/AAE-10	3 m

C-USB3/AB
USB 3.0 A (M) to B (M) Cable

C-USB3/AB-3	0,9 m
C-USB3/AB-6	1,8 m

USB 3.0

CLS-AOCU31/CC
USB 3.1 GEN–2 Optical USB–C (M) to USB–C (M) Cable

CLS–AOCU31/CC–10	USB 3.1 GEN–2 Optical USB–C Cable	3.00m
CLS–AOCU31/CC–15	USB 3.1 GEN–2 Optical USB–C Cable	4.60m
CLS–AOCU31/CC–25	USB 3.1 GEN–2 Optical USB–C Cable	7.60m
CLS–AOCU31/CC–35	USB 3.1 GEN–2 Optical USB–C Cable	10.70m
CLS–AOCU31/CC–50	USB 3.1 GEN–2 Optical USB–C Cable	15.20m

USB 3.1

C-USB3/MICROB
USB 3.0 A (M) to Micro–B (M) Cable

C-USB3/MicroB-3	0,9 m
C-USB3/MicroB-6	1,8 m

C-USB31/CC
USB 3.1 GEN–2 Cable USB–C (M) to USB–C (M) — 3ft

C-USB31/CA
USB 3.1 GEN–2 Cables USB–C (M) to USB–A (M) — 3ft

Cable Assemblies

USB 3.1

C-USB31/CB
USB 3.1 GEN–2 Cables USB–C (M) to USB–B (M) — 3ft

C-USB31/CMICROB
USB 3.1 GEN–2 Cables USB–C (M) to USB–MicroB (M) — 3ft

RS-232

C-D9M/D9F
RS–232 Control Cable

C-D9M/D9F-3	0,9 m
C-D9M/D9F-6	1,8 m
C-D9M/D9F-10	3,0 m
C-D9M/D9F-15	4,6 m
C-D9M/D9F-25	7,6 m
C-D9M/D9F-35	10,6 m
C-D9M/D9F-50	15,2 m

C-D9F/OPEN
RS–232 to Open End Control Cable

C-D9F/OPEN-3	0,9 m
C-D9F/OPEN-6	1,8 m
C-D9F/OPEN-10	3,0 m
C-D9F/OPEN-15	4,6 m
C-D9F/OPEN-25	7,6 m
C-D9F/OPEN-35	10,6 m
C-D9F/OPEN-50	15,2 m

DVI

C-DM/DM
DVI Dual Link Copper Cable

C-DM/DM-1.5	0,5 m	2560x1600
C-DM/DM-3	0,9 m	2560x1600
C-DM/DM-6	1,8 m	2560x1600
C-DM/DM-10	3,0 m	2560x1600
C-DM/DM-15	4,6 m	2560x1600
C-DM/DM-25	7,6 m	2560x1600
C-DM/DM-33	10 m	1920x1200
C-DM/DM-40	12 m	1920x1200
C-DM/DM-50	15.5 m	1920x1200
C-DM/DM-65	19.5 m	800x600

C-DM/DM/XL
DVI Single Link Copper Cable

C-DM/DM/XL-3	0,9 m	4K@30 Hz/1920x1200
C-DM/DM/XL-6	1,8 m	4K@30 Hz/1920x1200
C-DM/DM/XL-10	3,0 m	4K@30 Hz/1920x1200
C-DM/DM/XL-15	4,6 m	4K@30 Hz/1920x1200
C-DM/DM/XL-25	7,6 m	1080p@60 Hz 36 bit/1920x1200
C-DM/DM/XL-35	10,6 m	1080p@60 Hz 36 bit/1920x1200
C-DM/DM/XL-50	15,2 m	1080p@60 Hz 36 bit/1920x1200
C-DM/DM/XL-65	19,5 m	1080p@60 Hz 36 bit/1920x1200

C-MDM/MDM
Flexible DVI Single Link Copper Cable

C-MDM/MDM-3	0,9 m	1920x1200
C-MDM/MDM-6	1,8 m	1920x1200
C-MDM/MDM-10	3,0 m	1920x1200
C-MDM/MDM-15	4,6 m	1920x1200
C-MDM/MDM-25	7,6 m	1920x1200

C-DMA/5BM
DVI–A to 5 BNC Breakout Cable

C-DMA/5BM-3	0,9 m
C-DMA/5BM-6	1,8 m
C-DMA/5BM-10	3,0 m
C-DMA/5BM-15	4,6 m

DVI

C-MDMA/MGMA
15–pin HD to DVI & 3.5mm Stereo Audio Cable

C-MDMA/MGMA-3	0,9 m
C-MDMA/MGMA-6	1,8 m
C-MDMA/MGMA-10	3,0 m
C-MDMA/MGMA-15	4,6 m
C-MDMA/MGMA-25	7,6 m
C-MDMA/MGMA-35	10,6 m

Audio

C-XLQM/XLQF
XLR Quad Cable

C-XLQM/XLQF-1	0,3 m
C-XLQM/XLQF-1.5	0,5 m
C-XLQM/XLQF-3	0,9 m
C-XLQM/XLQF-6	1,8 m
C-XLQM/XLQF-10	3,0 m
C-XLQM/XLQF-15	4,6 m
C-XLQM/XLQF-25	7,6 m
C-XLQM/XLQF-35	10,6 m
C-XLQM/XLQF-50	15,2 m
C-XLQM/XLQF-75	22,9 m
C-XLQM/XLQF-100	30,5 m
C-XLQM/XLQF-125	38,1 m
C-XLQM/XLQF-150	45,7 m

C-A63M/XLM
6.3mm Male to 3–pin XLR Male Cable

C-A63M/XLM-10	3,0 m
C-A63M/XLM-15	4,6 m
C-A63M/XLM-25	7,6 m

C-A35M/A35M
3.5mm Stereo Audio Cable

C-A35M/A35M-3	0,9 m
C-A35M/A35M-6	1,8 m
C-A35M/A35M-10	3,0 m
C-A35M/A35M-15	4,6 m
C-A35M/A35M-25	7,6 m
C-A35M/A35M-35	10,6 m
C-A35M/A35M-50	15,2 m
C-A35M/A35M-65	19,5 m
C-A35M/A35M-75	22,9 m
C-A35M/A35M-100	30,5 m

Audio

C-AS35M/AS35F
3.5mm IR or Stereo Audio Extension Cable

C-AS35M/AS35F-50	15,2 m

C-A35M/2RAM
3.5mm to 2 RCA Breakout Cable

C-A35M/2RAM-3	0,9 m
C-A35M/2RAM-6	1,8 m
C-A35M/2RAM-10	3,0 m
C-A35M/2RAM-15	4,6 m
C-A35M/2RAM-25	7,6 m
C-A35M/2RAM-35	10,6 m
C-A35M/2RAM-50	15,2 m

C-A35F/2RAM
3.5mm to 2 RCA Breakout Cable

C-A35F/2RAM-1	0,3 m

C-2RAM/2RAM
RCA Stereo Audio Cable

C-2RAM/2RAM-1	0,3 m
C-2RAM/2RAM-2	0,6 m
C-2RAM/2RAM-3	0,9 m
C-2RAM/2RAM-6	1,8 m
C-2RAM/2RAM-10	3,0 m
C-2RAM/2RAM-15	4,6 m
C-2RAM/2RAM-25	7,6 m
C-2RAM/2RAM-35	10,6 m
C-2RAM/2RAM-50	15,2 m

Cable Assemblies

VGA

C-GM/GM
15–pin HD to 15–pin HD Cables

C-GM/GM-1	0,3 m
C-GM/GM-3	0,9 m
C-GM/GM-6	1,8 m
C-GM/GM-10	3,0 m
C-GM/GM-15	4,6 m
C-GM/GM-25	7,6 m
C-GM/GM-35	10,6 m
C-GM/GM-50	15,2 m
C-GM/GM-75	22,9 m
C-GM/GM-100	30,5 m
C-GM/GM-125	38,1 m
C-GM/GM-150	45,7 m

CP-GM/GM/XL
Only in N. America

15–pin HD Cable with a 45° Side–Angled Connector — Plenum Rated

CP–GM/GM/XL–3	0.9 m
CP–GM/GM/XL–6	1.8 m
CP–GM/GM/XL–10	3.0 m
CP–GM/GM/XL–15	4.6 m
CP–GM/GM/XL–25	7.6 m
CP–GM/GM/XL–35	10.7 m
CP–GM/GM/XL–50	15.2 m
CP–GM/GM/XL–75	22.9 m
CP–GM/GM/XL–100	30.5 m
CP–GM/GM/XL–125	38.1 m
CP–GM/GM/XL–150	45.7 m

C-MGM/MGM
15–pin HD Micro Cable

C-MGM/MGM-1	0,3 m
C-MGM/MGM-2	0,6 m
C-MGM/MGM-3	0,9 m
C-MGM/MGM-6	1,8 m
C-MGM/MGM-10	3,0 m
C-MGM/MGM-15	4,6 m
C-MGM/MGM-25	7,6 m
C-MGM/MGM-35	10,7 m

C-GM/GF
15–pin HD to 15–pin HD Cables

C-GM/GF-3	0,9 m
C-GM/GF-6	1,8 m
C-GM/GF-10	3,0 m
C-GM/GF-15	4,6 m
C-GM/GF-25	7,6 m
C-GM/GF-35	10,6 m
C-GM/GF-50	15,2 m
C-GM/GF-75	22,9 m
C-GM/GF-100	30,5 m

VGA

C-GMA/GMA
15–pin HD & 3.5mm Stereo Audio Cable

C-GMA/GMA-3	0,9 m
C-GMA/GMA-6	1,8 m
C-GMA/GMA-10	3,0 m
C-GMA/GMA-15	4,6 m
C-GMA/GMA-25	7,6 m
C-GMA/GMA-35	10,6 m
C-GMA/GMA-50	15,2 m
C-GMA/GMA-75	22,9 m

CP-GMA/GMA/XL
Only in N. America

15–pin HD & 3.5mm Audio Cable with a 45° Side–Angled Connector — Plenum Rated

CP–GMA/GMA/XL–3	0.9 m
CP–GMA/GMA/XL–6	1.8 m
CP–GMA/GMA/XL–10	3.0 m
CP–GMA/GMA/XL–15	4.6 m
CP–GMA/GMA/XL–25	7.6 m
CP–GMA/GMA/XL–35	10.7 m
CP–GMA/GMA/XL–50	15.2 m
CP–GMA/GMA/XL–75	22.9 m
CP–GMA/GMA/XL–100	30.5 m
CP–GMA/GMA/XL–125	38.1 m
CP–GMA/GMA/XL–150	45.7 m

C-MGMA/MGMA
15–pin HD & 3.5mm Stereo Audio Micro Cable

C-MGMA/MGMA-3	0,9 m
C-MGMA/MGMA-6	1,8 m
C-MGMA/MGMA-10	3,0 m
C-MGMA/MGMA-15	4,6 m
C-MGMA/MGMA-25	7,6 m

CP-MH1/MH1/XL
Only in N. America

15–pin HD, 3.5mm Stereo Audio & 3 RCA Hydra™ Multi–Head Cable — Plenum Rated

CP–MH1/MH1/XL–6	1.8 m
CP–MH1/MH1/XL–10	3.0 m
CP–MH1/MH1/XL–15	4.6 m
CP–MH1/MH1/XL–25	7.6 m
CP–MH1/MH1/XL–35	10.7 m
CP–MH1/MH1/XL–50	15.2 m
CP–MH1/MH1/XL–75	22.9 m
CP–MH1/MH1/XL–100	30.5 m
CP–MH1/MH1/XL–125	38.1 m
CP–MH1/MH1/XL–150	45.7 m

VGA

C-GM/XL
15–pin HD to Open End Installation Cable with EDID

C-GM/XL-15 (with EDID)	4,6 m
C-GM/XL-25 (with EDID)	7,6 m
C-GM/XL-35 (with EDID)	10,6 m
C-GM/XL-50 (with EDID)	15,2 m
C-GM/XL-75 (with EDID)	22,9 m

C-GM/5BM
15–pin HD to 5 BNC Breakout Cable

C-GM/5BM-1	0,3 m
C-GM/5BM-3	0,9 m
C-GM/5BM-6	1,8 m
C-GM/5BM-10	3,0 m
C-GM/5BM-15	4,6 m
C-GM/5BM-25	7,6 m
C-GM/5BM-50	15,2 m
C-GM/5BM-75	22,9 m
C-GM/5BM-100	30,5 m

C-GF/5BM
15–pin HD to 5 BNC Breakout Cable

C-GF/5BM-1	0,3 m
C-GF/5BM-3	0,9 m
C-GF/5BM-6	1,8 m
C-GF/5BM-10	3,0 m
C-GF/5BM-15	4,6 m
C-GF/5BM-25	7,6 m

C-GM/5BF
15–pin HD to 5 BNC Breakout Cable

C–GM/5BF–0.5	0.15m
C–GM/5BF–1	0.30m
C–GM/5BF–3	0.90m
C–GM/5BF–6	1.80m
C–GM/5BF–10	3.00m
C–GM/5BF–15	4.60m
C–GM/5BF–25	7.60m

RCA

C-RVM/RVM
RCA Composite Video Cable

C-RVM/RVM-3	0,9 m
C-RVM/RVM-10	3,0 m
C-RVM/RVM-15	4,6 m
C-RVM/RVM-25	7,6 m
C-RVM/RVM-35	10,6 m
C-RVM/RVM-75	22,9 m
C-RVM/RVM-100	30,5 m

BNC

C-BM/BM
BNC Coax Video Cable

C-BM/BM-1.5	0,5 m
C-BM/BM-3	0,9 m
C-BM/BM-6	1,8 m
C-BM/BM-10	3,0 m
C-BM/BM-15	4,6 m
C-BM/BM-25	7,6 m
C-BM/BM-35	10,6 m
C-BM/BM-50	15,2 m
C-BM/BM-75	22,9 m
C-BM/BM-100	30,5 m
C-BM/BM-150	45,7 m

C-MBM/MBM
BNC Mini Coax Video Cable

C-MBM/MBM-1	0,3 m
C-MBM/MBM-2	0,6 m
C-MBM/MBM-3	0,9 m
C-MBM/MBM-6	1,8 m
C-MBM/MBM-10	3,0 m
C-MBM/MBM-15	4,6 m
C-MBM/MBM-25	7,6 m

C-5BM/5BM
5 BNC RGBHV Mini Coax Cable

C-5BM/5BM-3	0,9 m
C-5BM/5BM-6	1,8 m
C-5BM/5BM-10	3,0 m
C-5BM/5BM-15	4,6 m
C-5BM/5BM-20	6,0 m
C-5BM/5BM-25	7,6 m
C-5BM/5BM-35	10,6 m
C-5BM/5BM-50	15,2 m
C-5BM/5BM-65	19,8 m
C-5BM/5BM-75	22,9 m
C-5BM/5BM-100	30,5 m

Adapters

Analog Adpaters

AD-BF/RM
BNC (F) to RCA (M) Adapter

AD-BM/RF
BNC (M) to RCA (F) Adapter

AD-BF/BF
BNC (F/F) Gender Changer

AD-BM/75
BNC (M) 75Ω Terminator Adapter

AD-BM/2BFY
BNC (M) to 2 BNC (F)

AD-BM/2BFT
BNC (M) to 2 BNC (F)

AD-RF/RF
RCA (F/F) Gender Changer

AD-GF/GF
15–pin HD (F/F) Gender Changer

AD-GM/GM
15–pin HD (M/M) Gender Changer

AD-GM/GF/RA
15–pin HD (M) to 15–pin HD (F) Right–Angled Adapter

AD-D9M/D9M
9–pin D (M/M) Gender Changer

AD-D9F/D9F
9–pin D (F/F) Gender Changer

AD-A35M/2RF
3.5mm (M) to 2 RCA (F) Adapter

Digital Adapters

AD-DM/HF
DVI–D (M) to HDMI (F) Adapter

AD-DF/HM
DVI–I (F) to HDMI (M) Adapter

AD-DM/GF
DVI (M) to 15–pin HD (F) Adapter

AD-HF/HF
HDMI (F/F) Gender Changer

AD-HF/HF/RA
HDMI (F) to HDMI (F) Right–Angled Gender Changer

AD-HF/HF/RA-FLAT
HDMI (F) to HDMI (F) Right–Angled Flat Gender Changer

AD-HF/HM/RA
HDMI (F) to HDMI (M) Right–Angled Adapter

AD-DF/DM/RA
DVI–I (F) to DVI–I (M) Right–Angled Adapter

AD-DF/DF/RA
DVI–I (F) to DVI–I (F) Right–Angled Gender Changer

AD-DF/DF/RA-FLAT
DVI–I (F) to DVI–I (F) Flat Right–Angled Gender Changer

ADC-DM/HF
DVI–D (M) to HDMI (F) Adapter Cable

ADC-DF/HM
DVI–I (F) to HDMI (M) Adapter Cable

AD-RING

AD-RING-1
Included adapters: DisplayPort (M) to HDMI (F); Mini DisplayPort (M) to HDMI (F)
1080p/1920x1200

AD-RING-2
Included adapters: DisplayPort (M) to HDMI (F); Mini DisplayPort (M) to HDMI (F); Mini HDMI type–C (M) to HDMI (F); Micro HDMI type–D (M) to HDMI (F)
1080p/1920x1200

AD-RING-3
Included adapters: DisplayPort (M) to HDMI (F); Mini DisplayPort (M) to HDMI (F); Mini HDMI type–C (M) to HDMI (F)
1080p/1920x1200

AD-RING-4
Included adapters: Mini DisplayPort (M) to HDMI (F); USB Type–C (M) to HDMI (F)
4K@60Hz (4:2:0)

AD-RING-5
Included adapters: Mini DisplayPort (M) to HDMI (F); USB Type–C (M) to HDMI (F); DisplayPort (M) to HDMI (F); Mini HDMI type–C (M) to HDMI (F)
4K@60Hz (4:2:0)

AD-RING-6
Included adapters: Mini DisplayPort (M) to HDMI (F); DisplayPort (M) to HDMI (F); USB type–C (M) to HDMI (F)
4K@60Hz (4:2:0)

AD-RING-7
Included adapters: USB type–C (M) to HDMI (F); Mini DisplayPort (M) to HDMI (F), DisplayPort (M) to HDMI (F)
USB-C - 4K60 (4:2:0) / MDP - 4K60 (4:4:4) / DP - 1080p

AD-RING-8
Included adapters: USB type–C (M) to HDMI (F); Mini DisplayPort (M) to HDMI (F)
USB-C - 4K60 (4:2:0) / MDP - 1080p/1920x1200

AD-RING-9
Included adapters: Display Port (M) to HDMI (F); Mini DisplayPort (M) to HDMI (F); USB type-C (M) to HDMI (F)
4K@60Hz (4:2:0)

TL-RING
Adapter Ring Tool Set

K-SPIDER
Active Multi-Format Input (M) to HDMI Output (M) Adapter Cable 4K@60Hz

Adapter Cables

ADC-DPM/DF
DisplayPort (M) to DVI–I (F) Adapter Cable

AD-DPM/HF
DisplayPort (M) to HDMI (F) Adapter Cable

ADC-DPM/HF
DisplayPort (M) to HDMI (F) Adapter Cable

ADC-DPM/GF
DisplayPort (M) to 15–pin HD (F) Adapter Cable

ADC-MDP/DF
Mini DisplayPort (M) to DVI–D (F) Adapter Cable

ADC-MDP/HF
Mini DisplayPort (M) to HDMI (F) Adapter Cable

ADC-MDP/GF
Mini DisplayPort (M) to 15–pin HD (F) Adapter Cable

ADC-HM/DPF
4K HDMI (M) to DisplayPort(F) Adapter Cable

ADC-MDP/M1
Mini DisplayPort to DVI, HDMI or VGA Adapter Cable

ADC-MDP/M2
Mini DisplayPort to DVI, HDMI or DisplayPort Adapter Cable

ADC-DPM/HF/UHD
DisplayPort (M) to HDMI (F) 4K Active Adapter Cable

ADC-MDP/HF/UHD
Mini DisplayPort (M) to HDMI (F) 4K Active Adapter Cable

ADC-HM/GF
HDMI (M) to 15–pin HD (F) Adapter Cable

ADC-GM/HF
15–pin HD (M) to HDMI (F) with USB Audio/Power Adapter Cable

ADC-DPM/MDPF
DisplayPort (M) to Mini DisplayPort (F) Adapter Cable

ADC-MDP/DPF
Mini DisplayPort (M) to DisplayPort (F) Adapter Cable

Adapter Cables

ADC-U31C/DPF
USB 3.1 Type–C to DisplayPort Adapter Cable

ADC-U31C/GF
USB 3.1 Type–C to VGA Adapter Cable

ADC-U31C/HF
USB 3.1 Type–C to HDMI Adapter Cable

ADC-U31C/M1
USB 3.1 Type–C to VGA & USB 3.0 & PD Adapter Cable

ADC-U31C/M2
USB 3.1 Type–C to HDMI & USB 3.0 & PD Adapter Cable

ADC-USB31/CAE
USB 3.1 C(M) to A(F) Adapter Cable

AD-USB31/CAE
USB 3.1 C(M) to A(F) Adapter

AD-USB3/AC
USB 3.0 Type–C (F) to Type–A (M) Adapter

AD-UCF/UCF
USB 3.1 Type–C (F) to Type–C (F) Adapter

C-USBC/DPM-6
USB Type–C (M) to DisplayPort (M) Cable

C-USBC/GM-6
USB Type–C (M) to 15–pin HD (M)

C-USBC/HM
USB Type–C (M) to HDMI (M) Cable

C-USBC/HM-6	1,8 m
C-USBC/HM10	3,0 m
C-USBC/HM-15	4,6 m

ADC-HM/HF/PICO
Ultra-Slim High-Speed HDMI Flexible Adapter Cable with Ethernet

KDOCK-1
USB-C Hub Multiport Adapter
4K@30 HDMI output
USB 3.0
USB-C charging pass-through

KDOCK-2
USB-C Hub Multiport Adapter with Ethernet port
4K@30 HDMI output
USB 3.0 data and charging port
Ethernet port
USB-C data port and charging pass-through

KDOCK-3
4K@30 HDMI output
4K@30 DisplayPort output
USB 3.0 data and charging port
Ethernet port
USB-C data port and charging pass–through

KDOCK-4
4K@30 HDMI output
4K@30 DisplayPort output
VGA output
USB 3.0 data and charging ports
Ethernet port
USB-C charging pass-through
SD and MicroSD ports

Adapters & Accessories

RG-6

CC-BNC-6
CON–COMP–BNC/M/RG–6;
BNC Compression Connector for
RG–6 Coax Cable; 25 pieces

CC-RCA-6
CON–COMP–RCA/M/RG–6;
RCA Compression Connector for RG–6
Coax Cable; 25 pieces

CC-F6
CON–COMP–F/M/RG–6; "F"
Compression Connector for RG–6 Coax
Cable; 25 pieces

RG-59

CC-BNC-59
CON–COMP–BNC/M/RG–59; BNC
Compression Connector for RG–59
Coax Cable; 25 pieces

CC-F59
CON–COMP–F/M/RG–59; "F"
Compression Connector for RG–59
Coax Cable; 25 pieces

RG-179

CC-BNC-179
CON–COMP–BNC/M/RG–179(26–28#);
BNC Compression Connector for 26–28
AWG Coax Cable; 50 pieces

CC-RCA-179
CON–COMP–RCA/M/RG–179(26–28#);
RCA Compression Connector for 26–28
AWG Coax Cable; 25 pieces

CC-BNC-22
CON–COMP–BNC/M/22#; BNC
Compression Connector for 22 AWG
Cable; 25 pieces

RG-6

CCR-BNC-6
BNC (M) PLUG CRIMP FOR RG–6

RG-59

CCR-BNC-59
BNC (M) PLUG CRIMP FOR RG–59

RG-179

CC-BNCM-179
BNC (M) PLUG CRIMP FOR MINI COAX

CC-BNCF-179
BNC (F) PLUG CRIMP FOR MINI COAX

RJ-45

CON-RJ45-3
K–LAN Crimp Style RJ–45 Connectors
for Category Cables

CABLE BOOT
Connector Boot for RJ–45

CB-BLACK
CB-LBLUE
CB-GRAY
CB-GREEN
CB-PURPLE

CON-FIELD
Field Assembly Shielded RJ–45
Connectors for CAT Cable
Fixed connector

CON-FIELD-360
Field Assembly Shielded RJ–45
Connectors for CAT Cable
With variable cable entry, 8 positions
possible

CON-KS6A-1
CAT6A STP 180 Toolfree Keystone Jack

PATCH-PANEL-24
24 Port FTP Blank Patch Panel

Adapters & Accessories

VGA

CON-HD15/H
15–pin HD Hoods for 10mm Cable

CON-HD15/BM
15–pin HD Male Solder Type Connector Body

CON-HD15/BF
15–pin HD Female Solder Type Connector Body

CON-HD15/G
50 Grommet Set to Adapt Hood to 9/8/7/6/5mm Cables

COLOR RINGS
Color Rings for Compression Connectors

CRC-Red
CRC-Green
CRC-Blue
CRC-Yellow
CRC-White
CRC-Black

Tools

TL-WS
Cable & Wire Stripper Tool

TL-B/CRIMP
Crimping Tool for Kramer Coax Bulk Cables

TL-STRIP
Coax Stripper

TL-STRIP/C
Cable Stripper — Extra Blade Cartridge

Bulk cables

CAT5E

BCLS-11GY
CAT 5E U/UTP 24AWG 350MHz Bulk Cable — Low Smoke & Halogen Free

BCLS–11GY–3	CAT 5E U/UTP LSZH Cable - Grey	305 m

CAT6

BCLS-21GR
CAT 6 U/UTP 23AWG 600MHz Bulk Cable — Low Smoke & Halogen Free

BCLS–21GR–3	CAT 6 U/UTP LSZH Cable - Green	305 m

BCLS-23GR
CAT 6 F/UTP 23AWG 400MHz Bulk Cable — Low Smoke & Halogen Free

BCLS–23GR–5	CAT 6 F/UTP LSZH Cable - Green	500 m

CAT6A

BCLS-31YL
CAT 6A U/UTP 23AWG 650MHz Bulk Cable — Low Smoke & Halogen Free

BCLS–31YL–5	CAT 6A U/UTP LSZH Cable - Yellow	305 m

BCLS-33OR
CAT 6A F/UTP LSZH Bulk Cable

BCLS–33OR–5	CAT 6A F/UTP LSZH Bulk Cable - Orange	500 m

BC-UNIKAT/LSHF
CAT6A U/FTP Video & LAN Bulk Cable — Low Smoke & Halogen Free

BC–UNIKAT/LSHF–100M	23 AWG U/FTP CAT6A Bulk Cable Optimized for Kramer's DGKat, HDBaseT and LAN applications (Blue)	100 m
BC–UNIKAT/LSHF–305M	23 AWG U/FTP CAT6A Bulk Cable Optimized for Kramer's DGKat, HDBaseT and LAN applications (Blue)	305 m
BC–UNIKAT/LSHF–500M	23 AWG U/FTP CAT6A Bulk Cable Optimized for Kramer's DGKat, HDBaseT and LAN applications (Blue)	500 m
BC–UNIKAT/LSHF/BK–305M	23 AWG U/FTP CAT6A Bulk Cable Optimized for Kramer's DGKat, HDBaseT and LAN applications (Black)	305 m

CAT6A

BC-UNIKAT/B2CA
CAT6A U/FTP Video & LAN Bulk Cable — Low Smoke & Halogen Free

BC–UNIKAT/B2ca–305M	23 AWG U/FTP CAT6A Bulk Cable Optimized for Kramer's DGKat, HDBaseT and LAN applications (Black jacket and Reaction to fire, in accordance with Regulation (EU) No 305/2011, B2ca–s1,d1,a1)	305 m

BC6A-LS203
CAT6A U/FTP 650MHz 4x2x23AWG Bulk Cable — Low Smoke & Halogen Free

BC6A–LS203–D305M	CAT6A U/FTP 650MHz 23AWG Bulk Cable — Low Smoke & Halogen Free	305 m
BC6A–LS203–D500M	CAT6A U/FTP 650MHz 23AWG Bulk Cable — Low Smoke & Halogen Free	500 m

BC6A-LSD203
CAT6A Dual U/FTP 650MHz 2x4x2x23AWG Bulk Cable — Low Smoke & Halogen Free

BC6A–LSD203–D500M	CAT6A Dual U/FTP 650MHz 23AWG Bulk Cable - Low Smoke & Halogen Free	500 m

CAT6A

BC6A-LS403
CAT6A F/FTP 650MHz 4x2x23AWG Bulk Cable — Low Smoke & Halogen Free

BC6A–LS403–D305M	CAT6A F/FTP 650MHz 23AWG Bulk Cable - Low Smoke & Halogen Free	305 m
BC6A–LS403–D500M	CAT6A F/FTP 650MHz 23AWG Bulk Cable - Low Smoke & Halogen Free	500 m

BC6A-LSD403
CAT6A Dual F/FTP 650MHz 2x4x2x23AWG Bulk Cable — Low Smoke & Halogen Free

BC6A–LSD403–D500M	CAT6A Dual F/FTP 650MHz 23AWG Bulk Cable — Low Smoke & Halogen Free	500 m

CAT7

BCLS-45RD-5
CAT 7 S/FTP 23AWG 750MHz Bulk Cable — Low Smoke & Halogen Free

Bulk cables

CAT7A

BC-DGKAT7A23
Four–Pair S/FTP Data Bulk Cable (23AWG)

BC–DGKat7a23–100M	23 AWG STP Bulk Cable Optimized for Kramer DVI & HDMI Products	100 m
BC–DGKat7a23–305M	23 AWG STP Bulk Cable Optimized for Kramer DVI & HDMI Products	305 m

Speaker

BC-2S12/LSHF
Speaker Bulk Cable — Low Smoke & Halogen Free

BC–2S12/LSHF–300M	Speaker Cable 12AWG — Low Smoke & Halogen Free	300 m

BC-2S14/LSHF
Speaker Bulk Cable — Low Smoke & Halogen Free

BC–2S14/LSHF–300M	Speaker Cable 14AWG — Low Smoke & Halogen Free	300 m

Speaker

BC-2S
Speaker Bulk Cable

BC–2S–300M	1 Pair: 16 AWG Speaker Bulk Cable	300 m

BC-2S/18
Speaker Bulk Cable

BC–2S/18-100M	1 Pair: 18 AWG Speaker Bulk Cable	100 m

BC-4S14/LSHF
Speaker Bulk Cable — Low Smoke & Halogen Free

BC–4S14/LSHF	4 Conductor Speaker Bulk Cable — Low Smoke & Halogen Free	300 m

Audio / Control

BC-1T
Mono Audio/Control Bulk Cable

BC–1T–300M	1 Shielded Pair: 20 AWG Audio or Control Bulk Cable	300 m

BC-2T
Stereo Audio/Control Bulk Cable

BC–2T–300M	2 Shielded Pair: 20 AWG Audio or Control Bulk Cable	300 m

COAX

BC-1X
1 Coax RG–6 Super High–Resolution Bulk Cable

BC–1X–100M	1 Coax: RG–6 Bulk Cable	100 m
BC–1X–300M	1 Coax: RG–6 Bulk Cable	300 m

COAX

BC-RG63G
1 Coax RG–6 Broadcast Quality Optimized for 3G HD–SDI Bulk Cable

BC–RG63G–152M	1 Coax: Broadcast Quality RG–6 Bulk Cable	152.4 m
BC–RG63G–305M	1 Coax: Broadcast Quality RG–6 Bulk Cable	305 m

BC-5X
5 Mini Coax High–Resolution Bulk Cable

BC–1X–100M	1 Coax: RG–6 Bulk Cable	100 m
BC–1X–300M	1 Coax: RG–6 Bulk Cable	300 m

BC-3X2T7S
14 Conductor Presentation/VGA Bulk Cable

BC–2S12/LSHF–300M	Speaker Cable 12AWG — Low Smoke & Halogen Free	300 m
BC–2S14/LSHF–300M	Speaker Cable 14AWG — Low Smoke & Halogen Free	300 m

Table Boxes

TBUS-1-KWC

TBUS with Wireless Charging Spot

Table Boxes

RTBUS-4C

Round Table Mount 4 Cable Pass-Through

Available Colors:

- Elegant in-table solution
- Easy to install
- Maximum diameter of 8mm and minimum strain relief width of 9mm

Power socket and power cord are purchased separately (see page 24-25)

RTBUS-11

Only in N. America

Round Table Mount Multi–Connection Solution — Pneumatic Lid

Available Colors:

- Elegant in–table solution
- Easy to install
- Pop–up Lid

Power socket and power cord are purchased separately (see page 24-25)

RTBUS-21XL

Round Table Mount Multi–Connection Solution — Pneumatic Lid — 110mm Cut–Out

Available Colors:

- Elegant in–table solution
- Easy to install
- Pop–up lid
- Inputs — 15–pin HD, 3.5mm, HDMI, Ethernet.

Power socket and power cord are purchased separately (see page 24-25)

Table Boxes

RTBUS-24

Round Table Connection Bus — 2 US Power Sockets, 2 USB Chargers & 1 HDMI Connector

Available Colors:

- Elegant, compact, in–table solution
- Easy to install
- Pop–up Lid
- UL certified
- For Use with 110V AC Power Only

Power socket and power cord are purchased separately (see page 24-25)

RTBUS-25XL

Round Table Mount Multi–Connection Solution — Pneumatic Lid — 110mm Cut–Out

Available Colors:

- Elegant in–table solution
- Easy to install
- Pop–up lid
- Inputs — 15–pin HD, USB, 3.5mm, HDMI, Ethernet.

Power socket and power cord are purchased separately (see page 24-25)

RTBUS-27XL

Round Table Connection Bus for Power Socket and Cable Pass–Throughs

Available Colors:

- Elegant in–table solution
- Easy to install
- Pop–up lid
- 2x cable pass through.

Power socket and power cord are purchased separately (see page 24-25)

Table Boxes

TBUS-201XL

Pop–Up Table Mount Multi–Connection Solution

Available Colors:

- Elegant in–table compact solution
- Avoids the tabletop cable clutter
- Easy to install
- Flexible to configure and customize
- Inputs — 15–pin HD, 3.5mm, HDMI, Ethernet.

Power socket and power cord are purchased separately (see page 24-25)

TBUS-202XL

Dual Pop–Up Table Mount Multi–Connection Solution

Available Colors:

- Elegant in–table solution
- Avoids the tabletop "cable jungle"
- Easy to install
- Flexible to configure and customize
- Inputs — 15–pin HD, 3.5mm, HDMI, Ethernet PER CONNECTING SURFACE.

Power socket and power cord are purchased separately (see page 24-25)

TBUS-203XL

Pop–Up Table Mount Multi–Connection Solution

Available Colors:

- 5 insert slots
- 1 AC power slot
- Pneumatic lift

Power socket and power cord are purchased separately (see page 24-25)
See page 27 for available frames

TBUS-204

Pop–up Table Connection Bus — 2 US Power Sockets & 2 USB Chargers

Available Colors:

- Elegant, compact, in–table solution
- Easy to install
- Pop–up Lid
- UL certified
- For Use with 110V AC Power Only

Power socket and power cord are purchased separately (see page 24-25)
See page 27 for available frames

Table Boxes

TBUS-20XL(WAVES)

Table Mount Modular Multi–Connection Solution – Unique Design

- Innovative Carbon look finish
- Unique lid shape with cables tunnels (waves)
- Lid open to both sides
- Lid wings can be fixed at any angle
- Easy and fast to install (electric screw driver from the top side of the table)
- Modular solution for power, connectors and cable retractors

Available Colors:

Frames, power sockets, and power cords are purchased separately (see pages 24-25)

TBUS-1AXL

Table Mount Modular Multi–Connection Solution — Tilt–Up Lid

- Cover — Manually opens & closes.
- Inner Frame — 6 different "TIAF" inner frame options are available that can accommodate a combination of up to 4 power sockets, 6 cable pass–through or connector inserts, 1 long insert and up to 3 Kramer TOOLS.
- Power Sockets — 8 different "TS" single and 8 dual power socket options are available to accommodate the power requirements worldwide.
- Power Cord — 8 different "C–AC" single power cords (and 3 "Y" power cords) for each power socket.
- Optional Accessories — TBUS Brackets, K–Able Box Cable Reels, Step–In Modules and Controllers are available.
- UL and CE Qualified.
- Connector Depth — Adjustable.

Available Colors:

Frames, power sockets, and power cords are purchased separately (see pages 24-25)

TBUS-1N

Table Mount Modular Multi–Connection Solution — Retractable Lid

- Modular Design — Tailors to your requirements.
- Cover — Black sand–blast or silver sand–blast anodized aluminum lid with a special opening for cable pass–through. (Note, other customized colors can be ordered).
- Height Adjustment — Use screw holes to set the inner frame (ordered separately) to the desired height.
- Power Sockets — Single or dual power socket openings are suitable for any of the following power sockets: USA, UK, Switzerland, Germany (the Europlug), Belgium–France, Italy, Australia, Israel, Brazil, South Africa or "Universal" for use anywhere.
- Cutout Dimensions — 195 +2mm x 173 +2mm (7.68 +0.08in x 6.82 +0.08in).

Available Colors:

Frames, power sockets, and power cords are purchased separately (see pages 24-25)

TBUS-1-KWC

TBUS with Wireless Charging Spot

- Integrated Wireless Charging Spot — For mobile phones integrated in the TBUS.
- Flush Surface
- Power Supply — Requires a supply voltage of 12V DC at 2.0A.
- Current Input — 1A, IEEE 802.15.4 based RF channels.
- Power Output — 6 to 15W.
- Regulatory Compliance — PMA type 3 compliant
  EMC Emission — EN5502/CISPR22
  Safety — EN60950–1, EN60950–1, UL60950–1, IEC 60950–1, RoHS, REACH
- Qi Standard Compliant
- Cutout Dimensions — 152+2mm x 191+2mm (6+0.08in x 7.5+0.08in).

Available Colors:

Frames, power sockets, and power cords are purchased separately (see pages 24-25)

Frame for TBUS-20XL(WAVES)



T20F-64
Inner Panel for TBUS–20XL–WAVES

Frames for TBUS 1AXL, TBUS-1N and TBUS-1-KWC

T1AF-16
1 Single Power Socket Slot, 6 Insert Slots (Includes 4 Blank & 2 Cable Pass–Through Inserts)

T1AF-26
1 Double Power Socket Slot, 6 Insert Slots (Includes 4 Blank & 2 Cable Pass–Through Inserts)

T1AF-44
2 Double Power Sockets Slots, 4 Insert Slots (Includes 2 Blank & 2 Cable Pass–through Inserts)

Table Boxes

TBUS-10XL

Table Mount Modular Multi–Connection Solution — Manually Retracting Lid

Shown complete with frame and socket

- Cover — Manually opens & closes.
- Inner Frames — T10F–22M can accommodate a combination of up to 2 power sockets, 2 inserts, 1 opening for a Kramer MegaTOOL SID–X1N; T10F–33 contains 3 power sockets and 3 inserts.
- Power Sockets — 11 different "TS" single and 10 dual power socket options are available to accommodate the power requirements worldwide.
- Power Cord — 8 different "C–AC" single power cords (and 3 "Y" power cords) for each power socket. UL and CE qualified.
- Connector Depth — Adjustable.
- Installation Requirement — Table cutout of 245mm x 154mm (9.65" x 6.07").
- Dimensions — Top plate: 171.6mm x 261mm (6.8" x 10.3") W, D.
- Weight — TBUS–10xl: 1.35kg (2.8lbs) approx.; table clamps: 0.25kg (0.6lbs) approx.
- Accessories — TBUS clamps (part of the TBUS enclosure), cut–out template, template screws, self–locking ties.
- Options — Inner frames, passive wall plates and interfaces, power socket kits, power cord, T–2INSERT kit, T–RC–8IR kit, T–RC–76 kit, T–RC–78 kit, Kramer K–Able Box (furniture–mounted cable extension).

Available Colors:

Frames, power sockets, and power cords are purchased separately (see pages 24-25)

Frames for TBUS-10XL

T10F-22M

2 Single Power Socket Slots
2 Insert Slots
1 Slot for a Kramer MegaTOOL

T10F-33

1 Dual & 1 Single Power Socket Slots
2 Blank Insert Slots
1 Cable Pass–Through

UTBUS-1XL

Under–the–Table Modular Multi–Connection Solution Enclosure

- Power Sockets — 8 different "TS" single power socket options are available to accommodate the power requirements worldwide.
- Power Cord — 8 different "C–AC" single power cords for each power socket.
- Insert Slots — 6.
- Installation Requirement — Requires 29.0cm x 13.7cm (11.42" x 5.4") of free space beneath the table.
- Weight — 0.6kg (1.32lbs) approx.

Frames, power sockets, and power cords are purchased separately (see pages 24-25)

UTBUS-2XL

Under–the–Table Modular Connection Bus

- Power Sockets — 10 different "TS" dual power socket options are available to accommodate the power requirements worldwide. (Purchased separately).
- Power Cord — 8 different "C–AC" single power cords for each power socket. (Purchased separately).
- Insert Slots — 6.
- Installation Requirement — Requires 34.0cm x 13.7cm (13.39" x 5.4") of free space beneath the table.
- Weight — 0.7kg (1.54lbs) approx.

Frames, power sockets, and power cords are purchased separately (see pages 24-25)

TBUS-3XL

Table Mount Modular Multi–Connection Solution — Tilt–Up Lid

Shown complete with frame and socket

- Inner Frame — 3 different "T3F" inner frame options are available that can accommodate a combination of up to 4 power sockets, 6 cable pass–through or connector inserts, 1 long insert and up to 3 Kramer TOOLS.
- Power Sockets — 8 different "TS" single power socket options are available to accommodate the power requirements worldwide.
- Power Cords — 8 different "C–AC" single power cords for each power socket.
- Optional Accessories — TBUS Brackets, K–Able Box Cable Reels, Step–In Modules and Controllers are available.
- Cover — Manually opens & closes.
- Connector Depth — Adjustable.
- Installation Requirement — Table cutout of 158mm x 123mm (6.23" x 4.85").
- Dimensions — Top plate: 17.6cm x 14.0cm (6.9" x 5.5") W, D; Enclosure: 13.6cm x 10.2cm x 13.0cm (5.4" x 4.0" x 5.1") W, D, H.
- Weight — 1.02kg (2.25lb) approx.; table clamps: 0.257kg (0.566lbs); template: 0.125kg (0.275lbs).

Available Colors:

Frames, power sockets, and power cords are purchased separately (see pages 24-25)

Frames for TBUS-3XL

T3F-1S
1 Single Power Socket Slot
1 Fixed 15–pin HD (PC)
1 Fixed USB–A
1 Fixed RJ–45 (Ethernet)
1 Fixed 3.5mm (Audio)

T3F-13
1 Single Power Socket Slot
3 Insert Slots (Includes
2 Blank & 1 Cable Pass–
Through Inserts)

T3F-1C
1 Single Power Socket slot
4 Fixed Cable Pass–Through



TBUS-5XL

Table Mount Modular Multi–Connection Solution — Manually Retracting Lid

Shown complete with frame and socket

- Inner Frame — 2 different "T5F" inner frame options are available that can accommodate a combination of up to 4 power sockets, 6 cable pass–through or connector inserts, 1 long insert and up to 3 Kramer TOOLS.
- Power Sockets — 8 different "TS" single power socket options are available to accommodate the power requirements worldwide.
- Power Cord — 8 different "C–AC" single power cords for each power socket.
- Optional Accessories — TBUS Brackets, K–Able Box Cable Reels, Step–In Modules and Controllers are available.
- Retractable Lid — Manually slides into unit.
- Connector Depth — Adjustable.
- Installation Requirement — Table cutout of 158mm x 123mm (6.23" x 4.85").
- Dimensions — Top plate: 17.6cm x 14.0.4cm (6.9" x 5.5") W, D; Enclosure: 15.4cm x 10.2cm x 13.0cm (6.1" x 4.0" x 5.1") W, D, H.
- Weight — 0.9kg (2.0lbs) approx.; table clamps: 0.25kg (0.55lbs) approx.

Available Colors:

Frames, power sockets, and power cords are purchased separately (see pages 24-25)

Frames for TBUS-5XL

T5F-1S
1 Power Socket Slot
1 Fixed 15–pin HD (PC)
1 Fixed USB–A
1 Fixed RJ–45 (Ethernet)
1 3.5mm (Audio)

T5F-13
1 Power Socket Slot
3 Insert Slots (Includes
2 Blank & 1 Cable Pass–
Through Inserts)

Table Boxes

TBUS-4XL

Table Mount Modular Multi–Connection Solution — Tilt–Up Lid

Shown complete with frame and socket

- Inner Frame — 2 different "T4F" inner frame options are available that can accommodate a combination of up to 4 power sockets, 6 cable pass–through or connector inserts, 1 long insert and up to 3 Kramer TOOLS.
- Power Sockets — 8 different "TS" single socket options are available to accommodate the power requirements worldwide.
- Power Cord — 8 different "C–AC" single power cords (and 3 "Y" power cords) for each power socket.
- Optional Accessories — TBUS Brackets, K–Able Box Cable Reels, Step–In Modules and Controllers are available.
- Cover — Manually opens & closes.
- Connector Depth — Adjustable.
- Installation Requirement — Table cutout of 225mm x 123mm (8.87" x 4.85").
- Dimensions — Top plate: 24.3cm x 14.0cm (9.6" x 5.5") W, D; Enclosure: 20.3cm x 10.2cm x 13.0cm (8.0" x 4.0" x 5.1") W, D, H.
- Weight — TBUS–4xl: 1.35kg (2.8lbs) approx.; table clamps: 0.25kg (0.6lbs).

Available Colors:

Frames, power sockets, and power cords are purchased separately (see pages 24-25)

Frames for TBUS-4XL

T4F-2S:
2 Single Power Sockets Slots
2 Fixed 15–pin HD (PC)
2 Fixed USB–A
2 Fixed RJ–45 (Ethernet)
2 Fixed3.5mm (Audio)

T4F-23
2 Single Power Sockets Slot
3 Insert Slots (Includes
2 Blank & 1 Cable Pass–
Through Inserts)

TBUS-6XL

Table Mount Modular Multi–Connection Solution — Manually Retracting Lid

Shown complete with frame and socket

- Inner Frame — 3 different "T3F" inner frame options are available that can accommodate a combination of up to 4 power sockets, 6 cable pass–through or connector inserts, 1 long insert and up to 3 Kramer TOOLS.
- Power Sockets — 8 different "TS" single power socket options are available to accommodate the power requirements worldwide.
- Power Cord — 8 different "C–AC" single power cords (and 3 "Y" power cords) for each power socket.
- Optional Accessories — TBUS Brackets, K–Able Box Cable Reels, Step–In Modules and Controllers are available.
- Retractable Lid — Manually slides into unit.
- Connector Depth — Adjustable.
- Installation Requirement — Table cutout of 225mm x 123mm (8.87" x 4.85").
- Dimensions — Top plate: 24.3cm x 14.0cm (9.6" x 5.5") W, D; Enclosure: 22.1cm x 10.2cm x 13.0cm (8.7" x 4.0" x 5.1") W, D, H.
- Weight — 1.35 kg (2.8 lbs) approx.; table clamps: 0.25 kg (0.6 lbs) approx.

Available Colors:

Frames, power sockets, and power cords are purchased separately (see pages 24-25)

Frames for TBUS-6XL

T6F-2S
2 Single Power Sockets Slots
2 Insert Slots
2 Fixed 15–pin HD (PC)
2 Fixed RJ–45 (Ethernet)
2 Fixed 3.5mm (Audio
2 Fixed USB–A

T6F-09
9 Insert Slots (Includes
6 Blank & 3 Cable Pass–
Through Inserts)

T6F-23
2 Single Power Socket Slots
3 Insert Slots (Includes
2 Blank & 1 Cable Pass–
Through Inserts)

K-POD302

Mounting Enclosure for Kramer 3-Gang Size Products

- Compatible with Kramer RC–74DL control keypad (sold seperately)
- Enhances room design
- Cost-effective and easy to install
- Ideal for boardrooms and conference rooms

MegaEdge US (US Version)

Portable Table Mount Power Station

- Power station with 120v AC output
- Power any mobile device or laptop
- Maximize active class learning freedom & flexibility
- Theft prevention
- All-in-one unit for power & charging

MegaEdge WW (Worldwide version)

Portable Table Mount Power Station

- Power station with 240v AC output
- Power any Mobile Device or Laptop
- Maximize Active Class Learning Freedom & Flexibility
- Theft Prevention
- All-in-One Unit for Power & Charging

Table Boxes

KRT-4
Cable Retractor

- Available for HDMI, VGA, Audio (3.5mm), LAN, USB, and DisplayPort connectors
- Extends cable up to 1.8m (5.9ft)
- Easy to install in a TBUS or as a stand–alone
- Compatible with many Kramer TBUS models

KRT–4–H	High–speed HDMI with Ethernet cable retractor with HDMI connector
KRT–4–DP	DisplayPort cable retractor with DisplayPort connector
KRT–4–VGA	VGA cable retractor with VGA connector
KRT–4–LAN	CAT 6 cable retractor with RJ–45 connector
KRT–4–A	Audio cable retractor with 3.5mm mini jack connector
KRT–4–USBC	USB type–C cable retractor with USB type–C connector
KRT–4–USB–3	USB 3.0 cable retractor with USB type–A connector
KRT–4–3H2	High–Speed HDMI 4K cable retractor with PT–3H2 signal extender

KRT-4-M1
Table Mounting Bracket for KRT-4

Single Power Socket

TS-1U
TBUS Power Socket - Universal

TS-1US
TBUS Power Socket - USA

TS-1GB
TBUS Power Socket - Great Britain



TS-1DE
TBUS Power Socket - Germany

TS-1FR
TBUS Power Socket - France

TS-1IT
TBUS Power Socket - Italy

TS-1CH
TBUS Power Socket - Switzerland

TS-1AU
TBUS Power Socket - Australia

TS-1IL
TBUS Power Socket Bracket for Legrand Mosaic Sockets

TS-1ZA
TBUS Power Socket Bracket - South Africa (socket purchased seperately by installer)

TS-BR
TBUS Power Socket - Brazil (contains 2 sockets in a single socket opening). Sockets purchased seperately by installer.

Dual Power Socket

TS-2U
TBUS Dual Power Socket - Universal

TS-2US
TBUS Dual Power Socket - USA

TS-2GB
TBUS Dual Power Socket - Great Britain

TS-2DE
TBUS Dual Power Socket - Germany

TS-2FR
TBUS Dual Power Socket - France

TS-2IT
TBUS Dual Power Socket - Italy

TS-2CH
TBUS Dual Power Socket - Switzerland

TS-2AU
TBUS Dual Power Socket - Australia

TS-2IL
TBUS Power Socket Bracket for 2 Legrand Mosaic Sockets

TS-2ZA
TBUS Power Socket Bracket - South Africa (sockets purchased seperately by installer)

Table Boxes

Power Sockets & Cables

TS-PEU
Universal Socket Power Extension for Modular TBUS

TS-2UC/U
TBUS Dual Socket Module with 1 Universal AC Power Socket and 2 USB Charging Ports

TS-201U
TBUS Power Socket Modules for all Kramer pop-up and round TBUS models.
Available AC models: Universal, Australia, Israel, Switzerland, 110V AC USA, South Africa, Germany, Italy, Brazil, France, Great Britain

TS-2UC/DE
TBUS Dual Socket Module with 1 DE (German/European) AC Power Socket and 2 USB Charging Ports

TS–2UC/US
TBUS Dual socket module with 2 US AC power sockets and 2 USB charging ports

T-2INSERT
TBUS Bracket to Install 2 Inserts in a Power Socket Opening

T-4INSERT
TBUS Bracket to Install Four Inserts in a Dual Power Socket Opening

T-TBLANK
TBUS Inner Frame Blank Plate for Kramer TOOLS

T-1GD
Mounting Bracket for Installing 1–Gang US–D Size Product Inside TBUS

KRAMER CABLE GUARD
Under the Table Cable Protector for TBUS

C-AC
TBUS AC Power Cord

C–AC/US	TBUS AC Power Cord — 6ft USA 110V AC	1.80m
C–AC/EU	TBUS AC Power Cord — Right–Angle Europe 6ft 220V AC	1.80m
C–AC/UK	TBUS AC Power Cord — UK 6ft 250V AC	1.80m
C–AC/JP	TBUS AC Power Cord — Japan 6ft 125V AC	1.80m
C–AC/IL	TBUS AC Power Cord — Israel 6ft 220V AC	1.80m
C–AC/IN	TBUS AC Power Cord — Right–Angle India 6ft 250V AC	1.80m
C–AC/CN	TBUS AC Power Cord — Right–Angle China 6ft 250V (10amp)	1.80m
C–AC/ZA	TBUS AC Power Cord — Right–Angle South Africa 6ft 250V (10amp)	1.80m
C–AC/AU	TBUS AC Power Cord — Australia 240V (10Amp)	1.80m

C-ACY
TBUS AC Power Cord Dual Outputs

Y-Type

C–ACY/US	TBUS AC Power Cord Dual Outputs — USA 6ft 110V AC	1.80m
C–ACY/EU	TBUS AC Power Cord Dual Outputs — Right–Angle Europe 6ft 220V AC	1.80m
C–ACY/UK	TBUS AC Power Cord Dual Outputs — UK 6ft 240V AC	1.80m

CT-200
Hook and Loop Cable Ties

Inserts

Audio



WA-1PN
Wall Plate Insert — 3.5mm Stereo Audio

WA-1XLF
Wall Plate Insert — XLR (F)

Special

W-2UC
Wall Plate Insert — Dual USB Charger

RC-10TB
Wall Plate Insert — 1–Button Contact Closure Switch

RC-20TB
Wall Plate Insert — 2–Button Contact Closure Switch



RC-21TB
Wall Plate Insert — 2–Button Contact Closure Switch

VGA

WX-2F
Wall Plate Insert — 15–pin HD (F/F)

WXA-2P
Wall Plate Insert — 15–pin HD & 3.5mm Stereo Audio

Data

W-45
Wall Plate Insert — RJ–45

W4545
Wall Plate Insert — Dual RJ–45

WA-45
Wall Plate Insert — 3.5mm Stereo Audio & RJ–45

WU-BA
Wall Plate Insert — USB (B/A)

Data

WU-AB
Wall Plate Insert — USB (A/B)

WU-AA
Wall Plate Insert — USB (A/A)

WU-2AA
2 x USB 2.0 (A/A) Wall Plate Insert

WU-CA
USB–C Single Wall–Plate Insert

Digital

W-H
HDM Wall Plate Insert

W-DP
Wall Plate Insert — DisplayPort

Blank

WCP
Wall Plate Insert — Cable Pass–Through

WCP-21
Wall Plate Insert — Two–Sized Cable Pass–Through

WCP-2
Wall Plate Insert — Dual Cable Pass–Through

W-BLANK
Wall Plate Insert — Blank Slot Cover Plate

W-2BLANK
Wall Plate Insert — Double Blank Slot Cover Plate

TS-1WUS
Dual Insert US Power Socket Module

Inserts

Frames

FRAME-1G/EUK
FRAME-1G/BG

Frame for Wall Plate Inserts — 1 Gang
2 Inserts

Available Colors

FRAME-1G/US

Frame for Wall Plate Inserts — 1 Gang
3 Inserts

Available Colors

FRAME-2G/EUK

Frame for Wall Plate Inserts — 2 Gang
4 Inserts

Available Colors

FRAME-1GP-80

Design Frame for 2 Wall Plate Inserts
— 1–Gang
EU–Size

Available Colors

FRAME-1GP-86

Design Frame for 2 Wall Plate Inserts
— 1–Gang
UK–Size

Available Colors

RK-WP6

19-inch rack adapter for mounting 6 single slot wall plate inserts into a 1U rack space

On-Wall Boxes

On-Wall Box (US-D)

DECORA® On–Wall Box

- Size — 1 gang — 75.1mm x 119.5mm x 48mm (2.96” x 4.71” x 1.89”); 2 gang — 121.3mm x 119.5mm x 48mm (4.78” x 4.71” x 1.89”).
- Availability — Available in white.

OWB–1G/D On–Wall Box, 1 Gang (US–D)
OWB–2G/D On–Wall Box, 2 Gang (US–D)

On-Wall Box (EU)

On–Wall Box European Size

- Size — 1 gang models — 80mm (W) x 80mm (H) (3.1” x 3.1”); 2 gang models — 148mm(W) x 80mm (H) (5.8” x 3.1”); for Depth see configurations.
- Color — Available in white.
- Included Hardware — Frame for 2/4/6 wall plate inserts. Inserts and blanks are not included.

OWB–1G/EU On–Wall Box, 1 Gang European, 40mm Depth
OWB–2G/EU On–Wall Box, 2 Gang European, 40mm Depth
OWB–1G/65 On–Wall Box, 1 Gang European, 65mm Depth
OWB–2G/65 On–Wall Box, 2 Gang European, 65mm Depth

On-Wall Box (Merten)

On–Wall Box Merten

- Dimensions — 148mm x 80mm x 40mm (5.8” x 3.1” x 1.5”).
- Size — 2 gang EU, available in polar white.
- Included Hardware — Housing (4 preformed cable entries, sealed with blanking caps) and M–Smart frame.
- Product Identical to MERTEN 512219 & 484219.

OWB–2G/M On–Wall Box, 2 Gang Merten

KramerAV.com

AV BEYOND THE BOX

© 2021 Kramer Electronics, Ltd. All rights reserved. Reproduction in whole or part without written permission is prohibited.

DECORA® is a registered trademark of Leviton Manufacturing Co., Inc. The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.