

16/2 STRANDED RISER SPEAKER CABLE, UNSHIELDED


ADI PRO

16 AWG 2 Stranded Conductors

Ratings CMR, CL3R, FT4
Approvals ETL Listed

Construction

Conductor 16 AWG Oxygen-Free Bare Copper, 26-Stranded
Conductor Count 2
Insulation PVC (0.011" nom.)
Insulation Colors Black, Red
Lay Length 3.69" nom.
Shielding N/A
Rip Cord Yes
Jacket PVC (0.016" nom.)
Overall Diameter 0.194" nom.

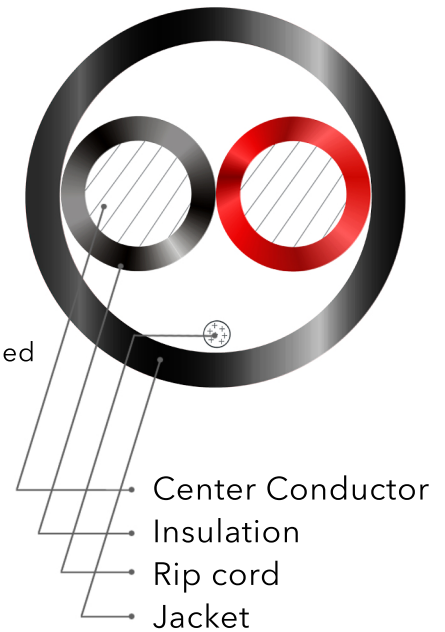

Print Legend ADI PRO P/N RN-500XXXX OXYGEN
FREE 2C16 3180662 (ETL)US CL3R
ROHS C(ETL)US CMR FT4
LOT # MMDDYY FOR AUDIO ONLY XXXXFT

Properties

Operating Voltage 300 Volts max.
DC Resistance 4.19Ohms/1000' at 20°C
Capacitance 22.5pF/ft. nom.
Temperature -20°C to 60°C
Flame Rating UL 1666 (Riser);
CSA C22.2 No. 2556 (FT4)
RoHS Compliant Yes
Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-5000101	WHITE	1000FT	EXPRESS BOX
RN-5000108	BLACK	1000FT	EXPRESS BOX
RN-5000501	WHITE	500FT	EXPRESS BOX
RN-5000503	GREEN	500FT	EXPRESS BOX
RN-5000502	BLUE	500FT	EXPRESS BOX



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands