

14/4 STRANDED RISER SPEAKER CABLE, UNSHIELDED

ADI PRO

14 AWG 4 Stranded Conductors


Ratings
Approvals

CMR, CL3R, FT4
ETL Listed

Construction

Conductor
Conductor Count
Insulation
Insulation Colors
Lay Length
Shielding
Rip Cord
Jacket
Overall Diameter

14 AWG Oxygen-Free Bare Copper, 41-Stranded
4
PVC (0.011" nom.)
Black, Red, White, Green
5.34" nom.
N/A
Yes
PVC (0.016" nom.)
0.260" nom.

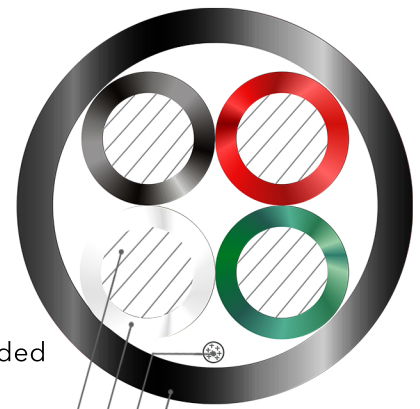

Center Conductor
Insulation
Rip cord
Jacket

Print Legend

ADIPRO P/N RN-500XXXX OXYGEN
FREE 4C14 3180662(ETL)US CL3R ROHS
C(ET CMR FT4 LOT # MMDDYY FOR AUDIO ONLY XXXXFT

Properties

Operating Voltage
DC Resistance
Capacitance
Temperature
Flame Rating

300 Volts max.
4.19Ohms/1000' at 20°C
22.5pF/ft. nom.
-20°C to 60°C
UL 1666 (Riser);
CSA C22.2 No. 2556 (FT4)

RoHS Compliant
Country of Origin

Yes
CHINA

PART#	COLOR	LENGTH	BOX
RN-5003501	WHITE	500FT	WOODEN REEL



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands