

16/4 65-STRANDED RISER SPEAKER CABLE, UNSHIELDED

ADI PRO

16 AWG 4 Oxygen-Free Bare Copper 65-Stranded Conductors

Ratings
Approvals

CMR, CL2R, FT4
ETL Listed

Construction


Conductor 16 AWG Oxygen-Free Bare Copper, 65-Stranded
Conductor Count 4
Insulation PVC (0.011" nom.)
Insulation Colors Red, Black, White, Green
Lay Length 4.46" nom.
Shielding N/A
Rip Cord Yes
Jacket PVC (0.016" nom.)
Overall Diameter 0.228" nom.

Print Legend

ADI PRO P/N RN-501XXXX OXYGEN
FREE 4C16 3180662(ETL)US CL2R 75C
ROHS C(ETL)US CMR FT4
LOT # MMDDYY FOR AUDIO ONLY XXXXFT

Properties

Operating Voltage 300 Volts max.
DC Resistance 4.19Ohms/1000'at 20°C
Capacitance 39.8pF/ft. nom.
Temperature -20°C to 60°C
Flame Rating UL 1666 (Riser);
CSA C22.2 No. 2556 (FT4)
RoHS Compliant Yes
Country of Origin CHINA

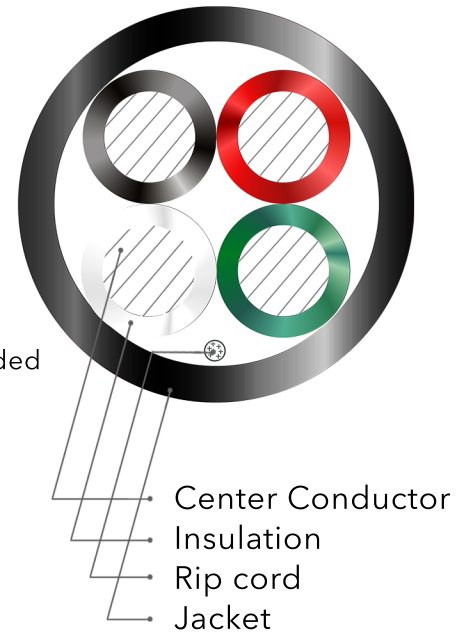

PART#	COLOR	LENGTH	BOX
RN-5010502	WHITE	500FT	EXPRESS BOX



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands