

14/2 STRANDED RISER SPEAKER CABLE, UNSHIELDED


ADI PRO

14 AWG 2 Stranded Conductors

Ratings CMR, CL3R, FT4
Approvals ETL Listed

Construction

Conductor 14 AWG Oxygen-Free Bare Copper, 41-Stranded
Conductor Count 2
Insulation PVC (0.011" nom.)
Insulation Colors Red, Black
Lay Length 4.42" nom.
Shielding N/A
Rip Cord Yes
Jacket PVC (0.016" nom.)
Overall Diameter 0.224" nom.

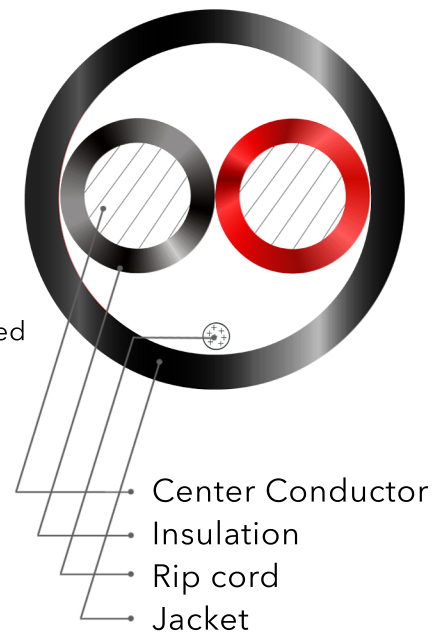

Print Legend ADIPRO P/N RN-501XXXX OXYGEN FREE
2C14 3180662(ETL)US CL3R ROHS C(ETL)US
CMR FT4 LOT # MMDDYY FOR AUDIO ONLY XXXXFT

Properties

Operating Voltage 300 Volts max.
DC Resistance 2.62Ohms/1000' at 20°C
Capacitance 24.6pF/ft. nom.
Temperature -20°C to 60°C
Flame Rating UL 1666 (Riser);
CSA C22.2 No. 2556 (FT4)
RoHS Compliant Yes
Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-5014501	WHITE	500FT	EXPRESS BOX



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands