

Maximal RDV Series

Rack Access Power Controllers (PTC)



Altronix Maximal RDV Rack Mount Access Power Controllers Series units distribute and switch power to access control systems and accessories. They convert a 220VAC 50/60Hz input into eight (8) or sixteen (16) independently controlled 12VDC and/or 24VDC PTC protected outputs. Outputs are activated by a normally open (NO) or normally closed (NC) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. Units will route power to a variety of access control hardware devices including: Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the outputs.



Maximal3RHDV

Key Features

- Eight (8) or Sixteen (16) independently controlled PTC protected 12VDC and/or 24VDC outputs
- Individually selectable Mag Lock/Strike (Fail-Safe, Fail-Secure) solid state PTC protected outputs
- Thermal and short circuit protection with auto reset
- Supervision:
 - AC Fail
 - Low Battery
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the outputs
- Fire Alarm disconnect input options:
 - a) Normally open (NO) or normally closed (NC) dry contact input
 - b) Polarity reversal input from FACP signaling circuit
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- Lifetime Warranty

Maximal RDV Power Supply Series Configuration Reference Chart

Altronix Model Number	2205VAC 50/60Hz Input Current	Power Supply Board Input Fuse Rating	Power Supply 1 (8 outputs)	Power Supply 2 (8 outputs)	Total Output Current	PTC Protected Auto-Resettable Outputs	Maximum Current Per ACM8CBBR-M Output
Maximal1RHDV	0.9A	5A/250V	12VDC @ 4A	N/A	4A	8	2.5A
			24VDC @ 3A	N/A	3A		
Maximal1RDV	0.9A	5A/250V	12VDC @ 4A	N/A	4A	16	2.5A
			24VDC @ 3A	N/A	3A		
Maximal3RHDV	0.9A	3.5A/250V	12VDC @ 6A	N/A	6A	8	2.5A
			24VDC @ 6A	N/A			
Maximal3RDV	0.9A	3.5A/250V	12VDC @ 6A	N/A	6A	16	2.5A
			24VDC @ 6A				
Maximal33RDV	1.9A	3.5A/250V	12VDC @ 6A	12VDC @ 6A	12A	16	2.5A
			24VDC @ 6A	24VDC @ 6A			
			12VDC @ 6A	24VDC @ 6A			

Lifetime Warranty

Maximal RDV Series

Rack Access Power Controllers (PTC)



Specifications

Input

Voltage 220VAC (working range 198VAC - 256VAC), 50/60Hz

Input Fuse Varies, See Reference Chart

Outputs

Voltage 12VDC and/or 24VDC see Reference Chart

Current Varies, see Reference Chart

Output PTCs 2.5A

Other Overvoltage protection
Filtered and regulated outputs

Battery Charging

Type Sealed lead acid or gel type

Failover Upon AC loss, instantaneous

Batteries are sold separately. Separate enclosure is required

Fire Alarm Disconnect

Supervised Latching or non-latching, individually selectable for any or all of the outputs.

Supervision

AC Failure Form "C" contacts

Battery Form "C" contacts

Indicators (LED)

Input Illuminated ON/Reset Switch

Output Individual Output Status LEDs located on the front panel

Physical and Environmental

2U rack mount chassis for use in standard EIA 19" rack.

Dimensions (H x W x D):

Enclosure:

3.26" x 19.125" x 8.5" (83mm x 486mm x 216mm)

Shipping:

20.25" x 12.5" x 7.25" (514.4mm x 317.5mm x 184.2mm)

Weight (approx.):

Model	Product Weight	Shipping Weight
Maximal1RHDV	10.7 lb. (4.85 kg)	12.7 lb. (5.76kg)
Maximal1RDV	10.7 lb. (4.85 kg)	12.7 lb. (5.76kg)
Maximal3RHDV	10.85 lb. (4.92 kg)	12.85 lb. (5.83 kg)
Maximal3RDV	10.85 lb. (4.92 kg)	12.85 lb. (5.83 kg)
Maximal33RDV	12.4 lb. (5.62 kg)	14.3 lb. (6.49 kg)

Temperature

Operating: 0°C to 49°C (32°F to 120°F)

Storage: - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity

85% +/- 5%

BTU/Hr. (approx.)

Model	12VDC	24VDC	12 and 24VDC
Maximal1RHDV	25	37	N/A
Maximal1RDV	25	37	N/A
Maximal3RHDV	37	74	N/A
Maximal3RDV	37	74	N/A
Maximal33RDV	74	141	106

Accessories (order separately)



RE2 – Rack Mount Battery Enclosure

- Accommodates up to four (4) 12VDC/7AH batteries




Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Dimensions and Drawing

Dimensions (H x W x D approximate)
3.26" x 19.125" x 8.5" (83mm x 486mm x 216mm)

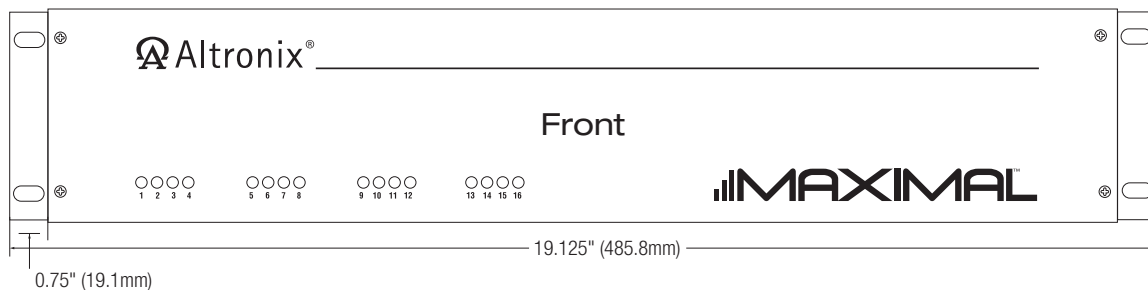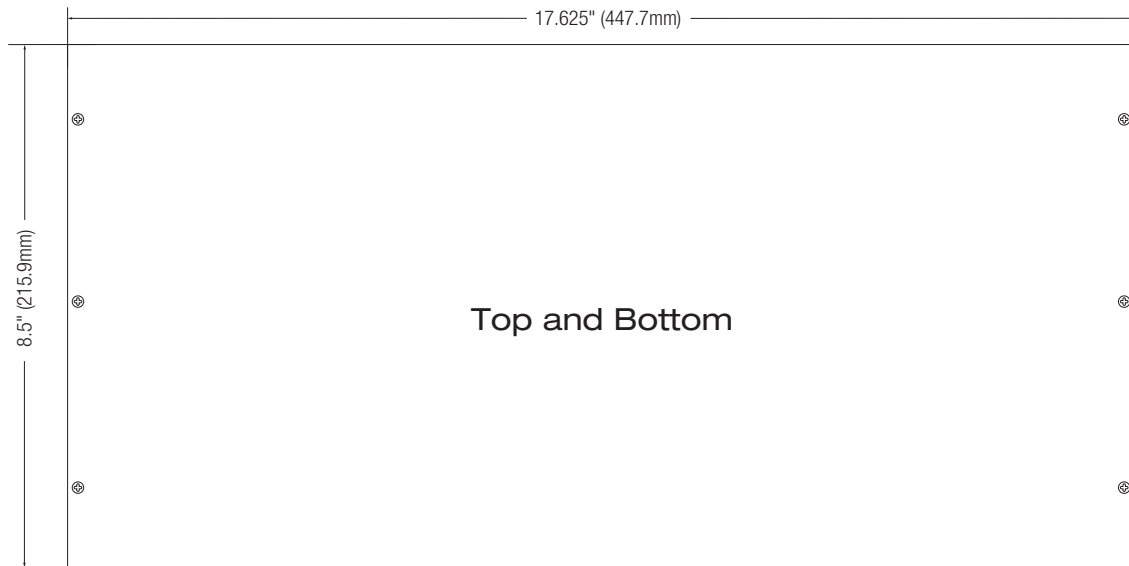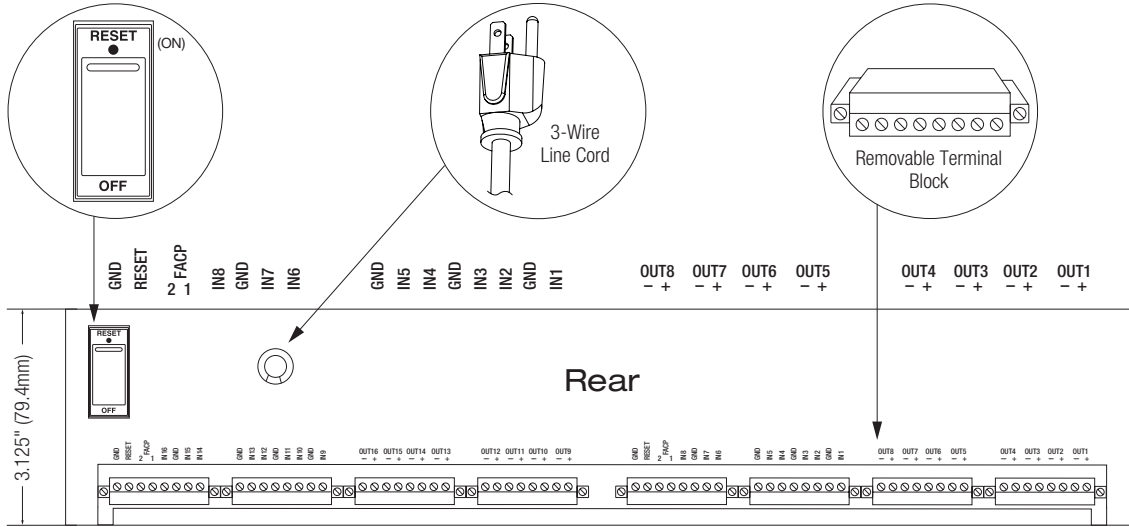

Lifetime Warranty