



**9PXXXC
Series
Multimode**

Single Fiber 3 Channel Bi-directional Transceiver: Digital 24 Bit Audio or Multi-Protocol Data or Contact Closure

FEATURES:

- 24Bit Digital Audio
- Diagnostics: Audio, Data, Contact, Power & Optical Presence
- Automatic Resettable Fuses on Power Lines

SPECIFICATIONS:

Audio:

I/O Level @ 600 Ohms 0 dBm
 Bandwidth 20 Hz to 20 KHz
 THD @ 1 KHz 0.1%
 SNR 80 dB
 Connector Terminal Block

Data :

Interface....
 485(2 or 4 Wire)
 RS422
 RS232
 Data Format Asynchronous, Serial
 Data Rate DC to 115 Kbs
 Connector..... Terminal Block

Contact Closure:

Input Switch Closure to Ground
 Output Dry Contact
 Response Time 2 mS
 Max Voltage 100 VDC or Peak AC
 Max Current..... 0.5 A
 Connector..... Terminal Block

Optical:

Wavelength.....1310/1550 nm
 Loss Budget (62/125µ)..... 15 dB
 Connector.....ST

Environmental

Operating Temp.....-40°C to +75°C
 Storage Temp.....-40°C to +85°C
 Humidity.....0% to 95% (non condensing)
 MTBF.....>100,000 hours

Power Supply:

Module – 12 VDC (AFI Part # PS-12D-2+)
 Rack Card – AFI SR 50/5

Size:

Module - 8 " x 4 " x 1 "
 Rack Card requires 1 rack slot – 6½" x1"x5"

Product Ordering Information:


MT-9PXXXC Module Transmitter
 MR-9PXXXC Module Receiver
 RT-9PXXXC Rack Card Transmitter
 RR-9PXXXC Rack Card Receiver
 Data X=5
 Audio X=8
 Contact X=9



The American Fibertek 9PXXXC Series transmits up to 3 channels of either high-quality, state of the art, 24bit digital audio and/or multi-protocol data and/or contact closure channel on one multimode optical fiber. Any combination of audio, data or contact is available up to 3 channels. This link is capable of providing an optical loss budget of 21dB utilizing 1310nm/1550nm wavelength lasers.

Designed to be completely transparent, this system requires no field adjustments at installation or additional maintenance thereafter. Diagnostic indicators provide a quick visual indication of system status.

Equipment may be ordered as stand alone modules or rack cards that are mounted in the American Fibertek Card Cages: SR-50/5 or SR50H/5 (redundant power supply option).

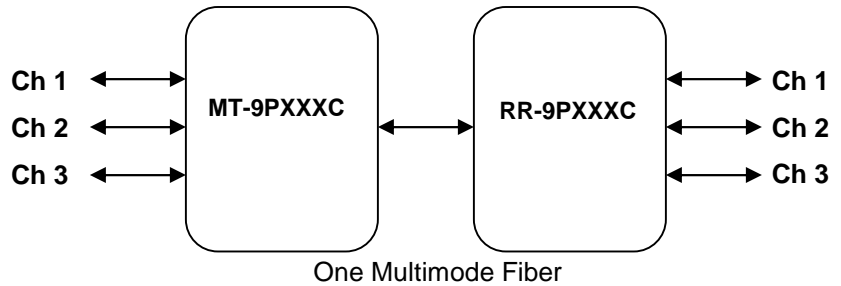

AMERICAN FIBERTEK, INC.

745 43RD STREET SOUTH, SAINT PETERSBURG FLORIDA 33711

email: mail@americanfibertek.com

phone: (800) 323-0660