

821LMC-S

Smart Garage[®] Control



PRODUCT GUIDE

LiftMaster

POWERED BY myQ.

821LMC-S

Smart Garage Control

This device provides a quick and easy smart home upgrade that allows you to link your existing garage door opener to the myQ® app.



Popular features

Smartphone control

Control your garage door from anywhere and receive real-time notifications when your garage door is opening or closing.

Compatibility

Works with most brands of garage door openers manufactured after 1993 that use photoelectric sensors that do not shut off.*

Expandable

Enables up to 16 myQ smart devices including LED lights and light controls.

In-Garage Delivery

Enables Amazon Key In-Garage Delivery, a secure and convenient package delivery solution for Prime members.**

Scheduling

Conveniently allows you to close and secure your garage door or have your lights turn on/off at designated times.


Guest access

Securely share access with people you know and trust through the myQ Guest feature.

New and improved setup


Enabling smart garage control has never been faster or easier. Physical installation takes minutes and new Bluetooth® pairing makes connecting your device to your smartphone and to Wi-Fi® a breeze.



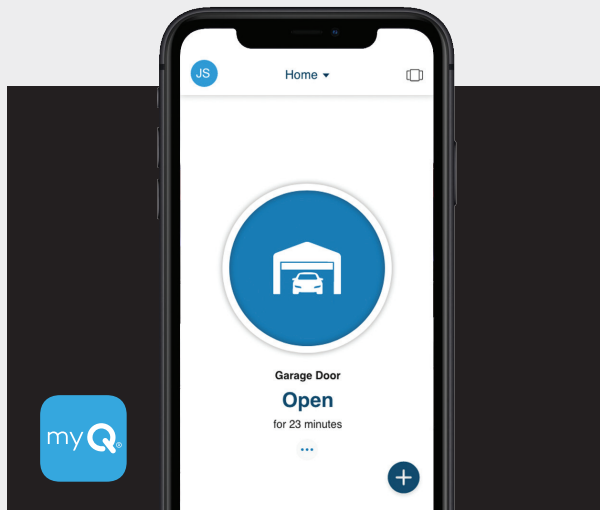

Control from anywhere

Peace of mind—delivered. Launch the myQ app to assure your garage door wasn't left open and close it with a tap of a button.

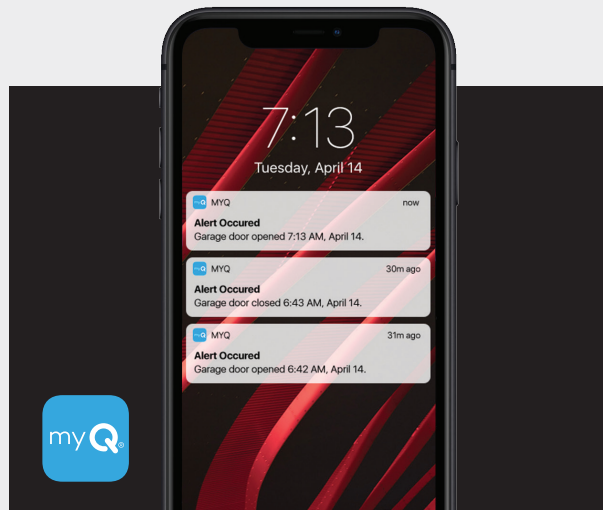

Always in the know

Everyone wants to know what's happening at home while you're away. With real-time notifications, you know every time your garage opens, closes or is left open.



Compatible accessories

MYQ-SGC1WLM



Smart Garage Camera
Adds streaming video and 2-way communication to the myQ app.

825LM



Remote Light Control
Plug in any lamp to control with a smartphone or garage remote.

827LM



myQ Remote LED Light
Easily mounts in minutes to provide light to any location in the garage.

823LM



Remote Light Switch
Replaces wall switches to enable lighting control with a smartphone or garage remote.

Specifications

Control

Add control of a second garage door opener with an additional garage door sensor (SKU: 821LMC-SENSOR sold separately), enables up to 16 myQ accessories including LED lights and light controls; acts as a Wi-Fi® bridge for Yale | LiftMaster Locks.

Components

Hub communicates with the garage door opener via radio control; plugs into an outlet and mounts on ceiling or walls in the garage; door sensor mounts on the top panel of the inside of a sectional garage door.

Dimensions

Hub:	3.875" W	3.875" H	1.25" D
Door Sensor:	2.625" W	2.625" H	.875" D

Wi-Fi Network

- 2.4 GHz
- IEEE 802.11 b/g/n
- Security: WPA2, WPA and WEP

myQ® Radio

902–928 MHz 50-Channel FHSS (frequency hopping spread spectrum); provides 2-way communication from garage door opener and myQ accessories; enables monitoring and control of garage door openers and lighting controls via smartphone/tablet.

Bluetooth™

Enhanced set up experience to home network; communicates with Yale | LiftMaster Locks

Compatibility

Works with most brands of garage door openers manufactured after 1993 that use photoelectric sensors that do not shut off*:

- LiftMaster®, Chamberlain®, Craftsman® and Raynor®: 310, 315, 390, 433.30, 433.92, 434.54 MHz
- Genie®: Intellicode® 315, 390 MHz
- Overhead Door®: CodeDodger® 315, 390 MHz
- Wayne Dalton®: KeeLoq® 372.5 MHz
- Stanley®: SecureCode 310 MHz
- Guardian®: 303 MHz
- Xtreme Garage®: 303 MHz
- Performax™: 303 MHz
- Sommer®: KeeLoq® 310 MHz

1 carton shipping details

Dimensions: 9.88" x 4.13" x 1.77"

Contents: 1 hub, 1 door sensor (additional sensors sold separately: 821LMC-SENSOR), power adaptor, mounting plate and hardware, quick start guide
Weight: .87 lbs.

Master pack shipping details

Dimensions: 10.75" x 10.00" x 9.13"

Quantity: 10 units

Weight: 9.69 lbs.

Pallet shipping details

Dimensions: 48.00" x 40.00" x 48.43"

Quantity: 800 units

Weight: 775.12 lbs.

1 Year Warranty

Note: only install this device with a sectional door—not for use with gates or commercial garage doors.



For purchase and professional install

Visit LiftMaster.com

For partners

Orders: 800.282.6225 | Support: 800.528.2806 | Self service: LiftMasterTraining.com

© 2022 The Chamberlain Group LLC. All Rights Reserved. | LMACENPGSMCNTRL_202209_MC21

*Within the US: The Smart Garage Control is not intended for use with garage door openers in which the photoelectric sensors located near the bottom of the garage door change power mode (e.g., lights on the sensors turn off after the door is closed), or any Chamberlain Group opener with a yellow learn button manufactured between 2010 and 2021, or any Linear opener. **In-garage delivery is available for Amazon Prime members in select cities and surrounding areas. To learn more about Amazon Key and to check your eligibility, visit myq.com/amazon-key. Terms and conditions apply.

LiftMaster, the LiftMaster logo, myQ, the myQ logo and Chamberlain are registered trademarks of The Chamberlain Group LLC. Patented and patents pending. See LiftMaster.com/patents. Amazon, Key and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Wi-Fi® is a trademark of Wi-Fi Alliance®. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. Yale is a trademark of ASSA ABLOY Residential Group, Inc. Craftsman is a registered trademark of Stanley Black & Decker, Inc. Raynor is a trademark of Raynor Worldwide. Genie and Intellicode are trademarks of GMI Holdings, Inc. Overhead Door, Wayne Dalton and CodeDodger are trademarks of Overhead Door Corporation. KeeLoq is a registered trademark of Microchip Technology Inc. Stanley is a trademark of Stanley Logistics L.L.C. Xtreme Garage and Performax are trademarks of Menard, Inc. Sommer is a trademark of Sommer Antriebs-und Funktechnik GmbH. All other trademarks are the property of their respective owners.