TROVE™

TM400
Access & Power Integration Solution

Altronix TM400 enclosure lets you easily integrate Altronix power with Mercury* access controllers and accessories. TM400 simplifies board layout and wire management, reduces installation time and labor costs.

*Also compatible with these authentic Mercury partners:
AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicard, IMRON, Johnson Controls, Kastle, Keri Systems, LenelS2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic Video Insight, Quintron, RS2, Schneider Electric, Vanderbilt

TM400

* Boards not included

Key Features

- Accommodates the following Mercury controllers with or without Altronix power/accessories (sold separately):
  - Mercury: LP1502, LP4502, MR52, MR16IN, MR16OUT, MR62e, LP1501, MR50
  - Altronix Power Supply/Charger and Sub-Assembly
- 16 Gauge steel enclosure.
- Convenient knockout configuration:
  - Twelve (12) double knockouts 1.125" (3/4" Conduit) / 1.375" (1" Conduit).
  - Cam lock and keys are included.

Capacity
- Fits two (2) 12VDC/7AH batteries.

Physical and Environmental
Dimensions (H x W x D)
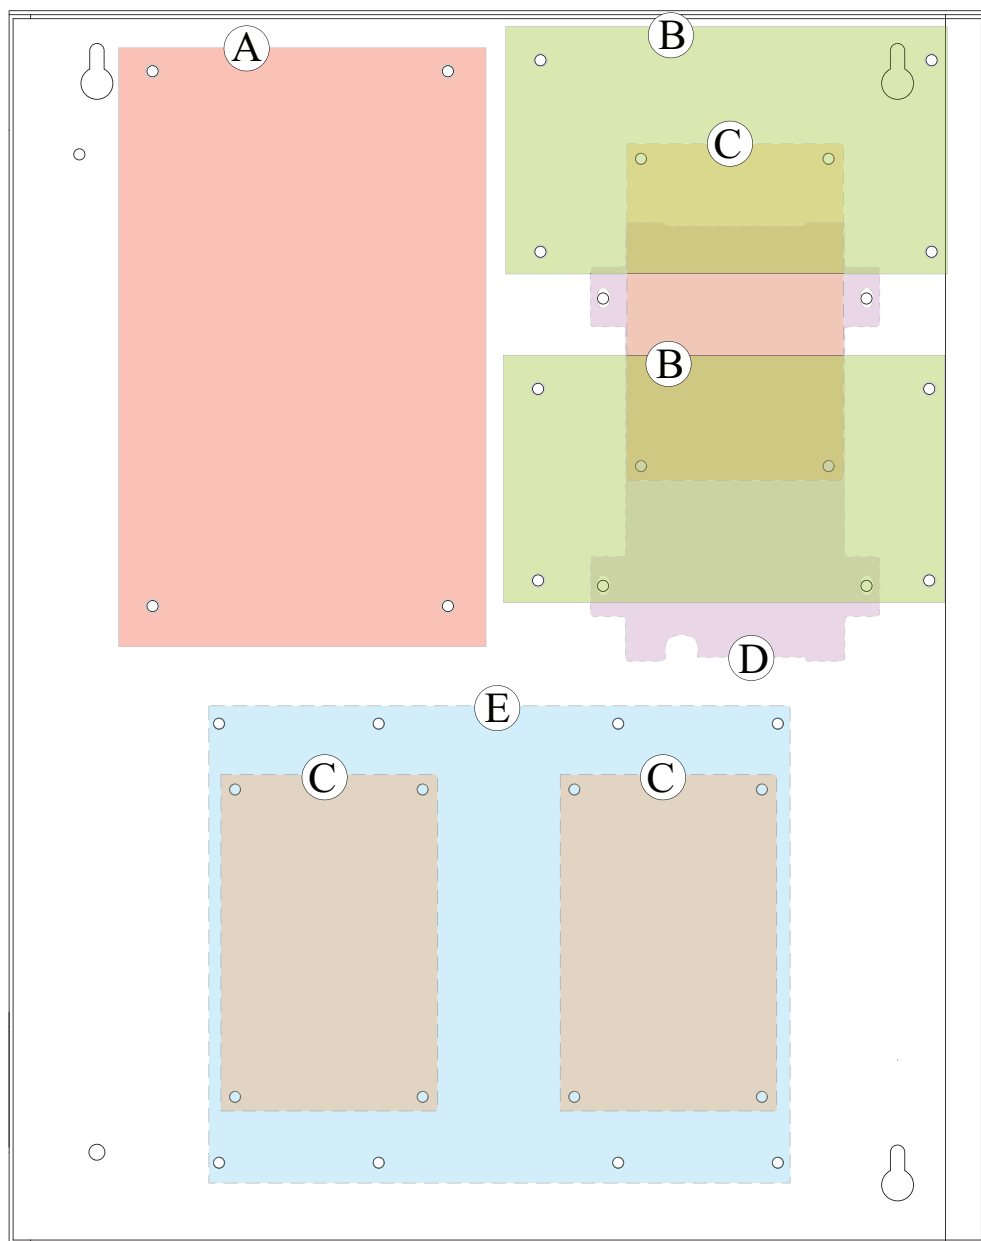15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm).

Product Weight   7.8 lbs. (3.54kg).

Shipping Weight   9.1 lbs. (4.13 kg).

Access Controller Position Chart for the Following Models:

Altronix / Mercury	Pem Mounting
AL400ULXB2, AL400ULXB2V, AL600ULXB, AL600XB220, AL1012ULXB, AL1012XB220, eFlow4NB, eFlow4NBV, eFlow6NB, eFlow6NBV, eFlow102NB, eFlow102NBV	Ⓐ
ACM4, ACM4CB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB, VR6	Ⓑ
MR50	Ⓒ
LP1501, MR62e	Ⓓ
LP1502, LP4502, MR52, MR16IN, MR16OUT	Ⓔ

Dimensions and Drawing

Dimensions (H x W x D approximate)

15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)