

**43" IP Public View Monitor**



5MP IP camera output



# 43IPHPVM


BUILT TO RUN **24 X 7 X 365** CONTINUOUSLY

## Overview

The OIC Korea 42.5 inch IP HD PVM (Public View Monitor) with built in camera and motion detection sensor becomes a highly effective theft deterrent tool creating awareness that a security surveillance system is in place.

## Features

- Built-In 1 / 2.8" 5MP Sony CMOS
- 2.8mm fixed Lens
- 1920 x 1080 Resolution, 450 Nits, 1100:1 Contrast
- 3D Comb Filter / Noise Reduction / Deinterlace
- Motion Detection Supported
- Frame Rate Up to 5MP(2688x1944)
- HDMI 1 In, VGA 1 In, Audio Out/In
- 24V DC Power + AC Inlet
- Electro-Galvanized Steel
- Display Logo & Banner(Waring message)

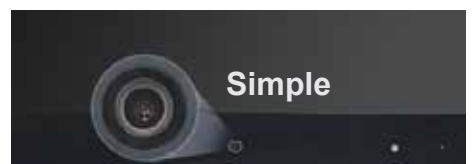


### Specification

| Model 43IPHPVM             |   |
|----------------------------|---|
| <b>Display</b>             |   |
| Screen diagonal dimension  | 42.5"                                       |
| Resolution                 | 1920 x 1080 pixels                          |
| Pixel Pitch                | 0.4902*0.4902 mm                            |
| Brightness                 | 450 cd/m <sup>2</sup>                       |
| Contrast Ratio             | 1100:1                                      |
| Aspect Ratio               | 16:9  |
| Viewing Angle (H/V)        | 178°/178°                                   |
| Display Color              | 16.7 million                                |
| Response Time              | 12 ms                                       |
| Video System               | NTSC/PAL                                    |
| Panel Life Time (hours)    | 50,000 hours                                |
| <b>Interface</b>           |   |
| VGA In (15Pin D-Sub)       | 1   |
| PC Stereo In               | 1   |
| HDMI In                    | 1   |
| Video In/Out (BNC Type)    | 1/1   |
| Audio In(RCA Type)         | 2 (L/R)                                     |
| Built in Speakers          | Y (1W*2)                                    |
| <b>Transmitter</b>         |   |
| Remote Control             | Y   |
| <b>Special features</b>    |   |
| Filter Type                | 3D Comb filter                              |
| De-interlacing             | Y   |
| Noise reduction            | Y   |
| Auto source sequencing     | Y   |
| Multilingual Language      | Eng, Spa, Fre, Ger, Ita                     |
| Motion Detection           | Camera Motion Sensor                        |
| <b>IP camera</b>           |   |
| Camera Type                | 5MP IP/HDMI                                 |
| Image Sensor               | 1/2.8" Sony 5MP CMOS                        |
| Resolution[Max]            | 2688 x 1944                                 |
| Lens                       | 2.8mm Fixed Lens                            |
| Electronic Shutter[second] | NTSC: 1/30 ~ 1/100000, PAL: 1/25 ~ 1/100000 |
| <b>Cabinet</b>             |   |
| Cabinet Color              | Black                                       |
| Cabinet Material           | Electro-Galvanized Steel                    |
| <b>Power</b>               |   |
| Electrical Ratings         | DC 24V adaptor                              |
| <b>Circumstance</b>        |   |
| Operating Temperature      | 0°~50°                                      |
| Storage Temperature        | -20°~60°                                    |
| <b>Mounts</b>              |   |
| VESA Mount Size            | 200x200 mm                                  |
| Ceiling Mount              | CMK-01 with FMA-01                          |
| Wall                       | WB-2642                                     |
| <b>Dimension</b>           |   |
| Outline Dimension(mm)      | 969.4 x 622.7 x 76.6                        |


\* Specifications may change without prior notice.

### Interface

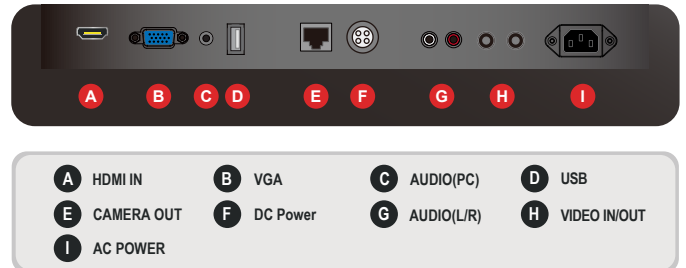

### Dimension

Unit : mm

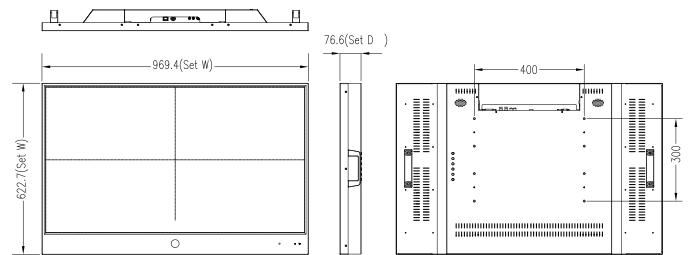

### Optional Mounts

