

MTP-MTP 10G 50/125 μ m OM4 MM Fiber Optic Jumper




Package Includes

- A. MTP-MTP 10G 50/125 μ m MM Fiber Jumper, **1 Piece**

Features and Benefits

- Made from OM4 fiber, compatible with any MTP cassettes & other MTP modules
- Laser optimized fiber optic cable designed for 10 GHz applications
- Made with Corning® ClearCurve® glass, Bend-insensitive multimode fiber (BIMMF)
- Used with ICC fiber optic products
- Available in 5, 10 15, 20, 30, 40, 50, 60, 70, 80, 90 & 100 meters
- Dust Cap included
- 100% factory tested
- Used with ICFC fiber cassette series

* *ClearCurve® is a registered trademark of Corning®**

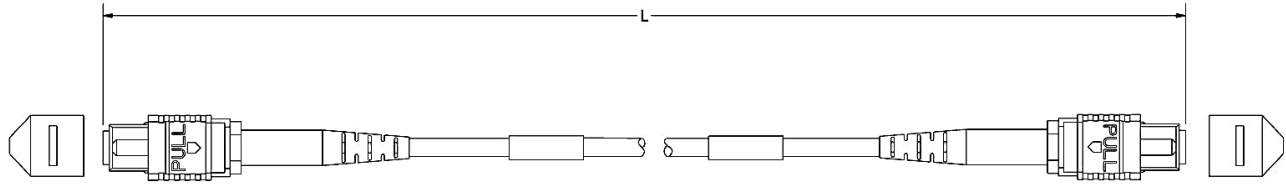

NOTE: UNLESS OTHERWISE SPECIFIED

1. Cable:

- A. Color: Aqua
- B. Fiber Counts: 2 Fiber Zipcord
- C. Fiber Type: Laser Optimized MM 50/125µm
- D. Attenuation: 2.3/0.6 dB/km @ 850/1300 nm
- E. Bandwidth: 3500/500 MHz.km EMB @ 850/1300 nm
- F. Cable Data:
 - Cable diameter: 0.11 in ± 0.007 in (3.0 mm ±0.2mm)
 - Weight: 12 lbs./kft
 - Bend radius: 1.2" MIN
 - Loading: 135 lbs. MAX
 - Impact cycle: 1500

ITEM NUMBER	L (LENGTH)
ICFOJATQ05	5 METER ± 10 CM
ICFOJATQ10	10 METER ± 10 CM
ICFOJATQ15	15 METER ± 10 CM
ICFOJATQ20	20 METER ± 10 CM
ICFOJATQ30	30 METER ± 10 CM
ICFOJATQ40	40 METER ± 10 CM
ICFOJATQ50	50 METER ± 10 CM
ICFOJATQ60	60 METER ± 10 CM
ICFOJATQ70	70 METER ± 10 CM
ICFOJATQ80	80 METER ± 10 CM
ICFOJATQ90	90 METER ± 10 CM
ICFOJATQ100	100 METER ± 10 CM

2. MTP Connector:

- A. Ferrule: Zirconia
- B. Insertion Loss: 0.5 dB typical, 0.75dB max
- C. Return Loss: ≥ 60dB

2. Compliance:

- A. ANSI/TIA-568-C.3

4. Length XX: 05, 10, 15, 20, 30, 40, 50, 60, 70, 80, 90 & 100 meters

*MTP® is a registered trademark of US Conec Ltd