




## WALL MOUNT: UNIQUE FEATURES FOR ZONE CABLING

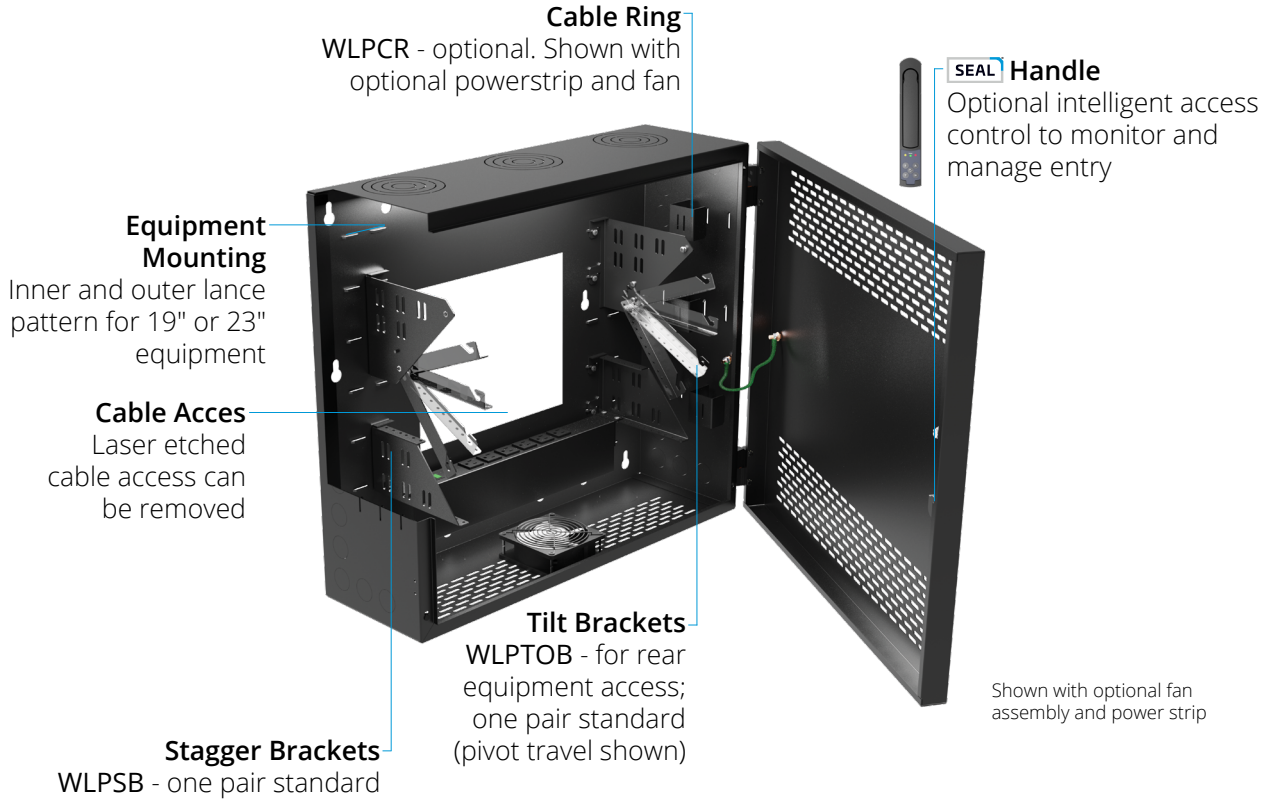

**SEAL** Security Ready. Add intelligent access to create a SEAL® solution!

Height	Color	Handle	Airflow	Example
GLXXWLP	B-	XX-	XX-	Configured WDX
24	B (Black)	SH (Swing Handle)	AF (Fan Included) <sup>3</sup>	GL24WLP-B-SH-AF
36		SC (SEAL Combo) <sup>1</sup>	00 (None)	
48		SE (SEAL Electronic) <sup>2</sup>		


<sup>1</sup>4 Digit combination handle; <sup>2</sup>Electronic handle GL-SEAL-TL3RF; <sup>3</sup>One fan included with wall mounts; 36" and 48" can accept additional fan

### FEATURES


- #12-24 tapped mounting brackets (19 or 23" mounting) that can be vertically adjusted
- One pair of 4 RMU tilt brackets and one pair of 6 RMU stagger brackets included
- Multiple nominal concentric conduit knockouts on top, bottom, sides, and back
- 150mm x 25mm standard door handle cutout
- Reversible mounting for left-hand or right-hand opening
- Standards: UL2416, RoHS II




4193 Route 6N • Edinboro, PA 16412 | 1.866.879.4522  
 View the complete Great Lakes product line at [GreatCabinets.com](http://GreatCabinets.com)  
 ©2021 Great Lakes Data Racks & Cabinets. All rights reserved.

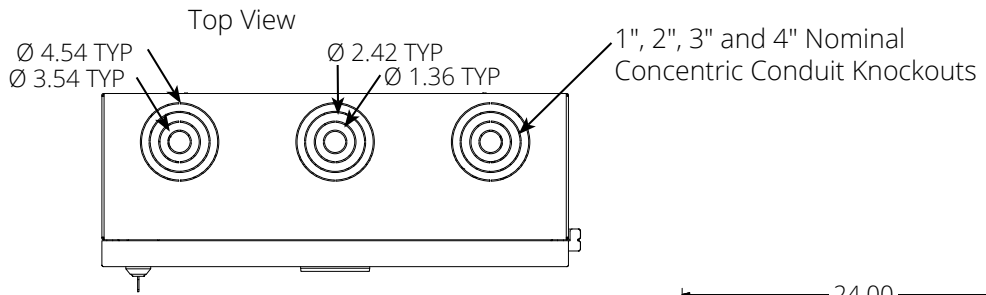


1" Nominal Concentric Conduit Knockouts

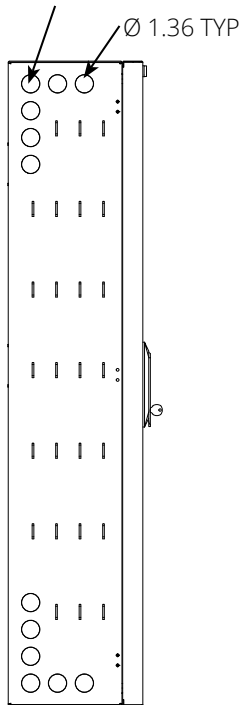

Side View

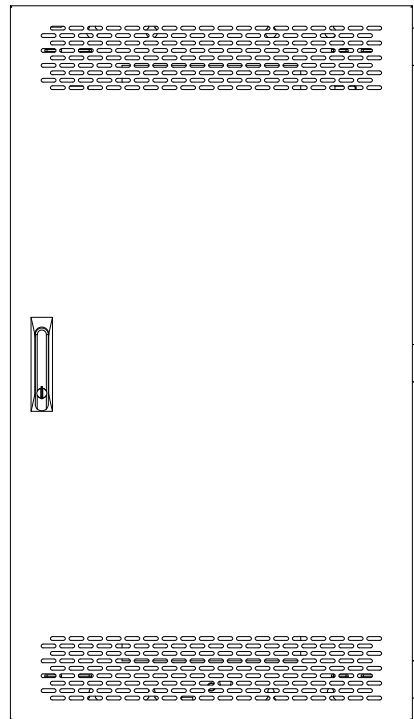

Front View

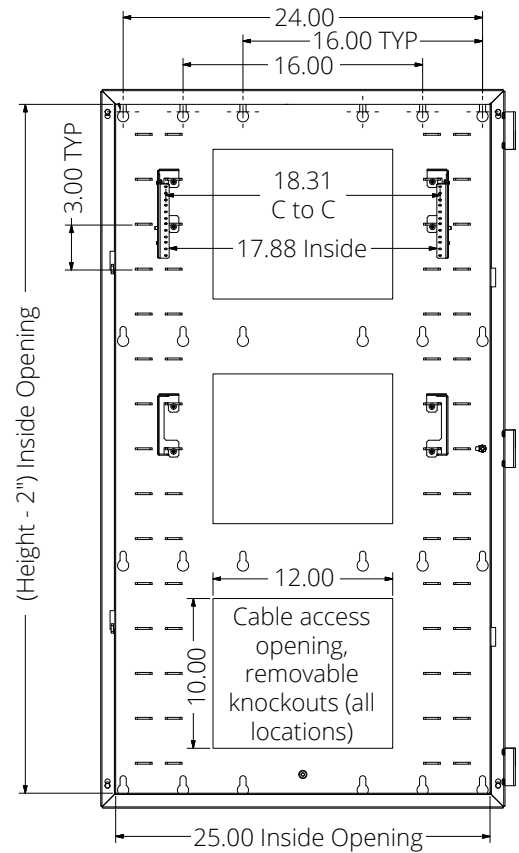

Front View (door removed for clarity)

Specs	RMU	Weight Cap. lbs.
GL24WLP	6-10+	105
GL36WLP	6-10+	105
GL48WLP	6-10+	150

All sizes: 27"W x 10"D

## POPULAR ACCESSORIES

Part No.	Description
7217-04	Fan assembly with one 75 CFM fan
CBB-19	Copper Bus Bar for 19" mounting
7219	6 receptacles, 5-15R receptacle, 5-15P plug, 15 amp, 125V power strip for 19" mounting
WLPSB	Stagger bracket set, (top of bracket, 2 RMU; bottom of bracket, 4 RMU)
WLPTOB	Tilt-out bracket set, 4 RMU, for installation along mounting profile lances
CM-06	3/4"W x 6"L, single black strap