

# Product End of Life Instructions

## Smart-UPS® ≥ 1500 VA


The Smart-UPS products provides power protection for servers, voice / data networks, medical labs, and light industrial applications.



## Potential disassembly risks

Potential hazard of electrical shock, explosion or arc flash, from improper battery: contact, exposure or handling.

## End of Life Instructions

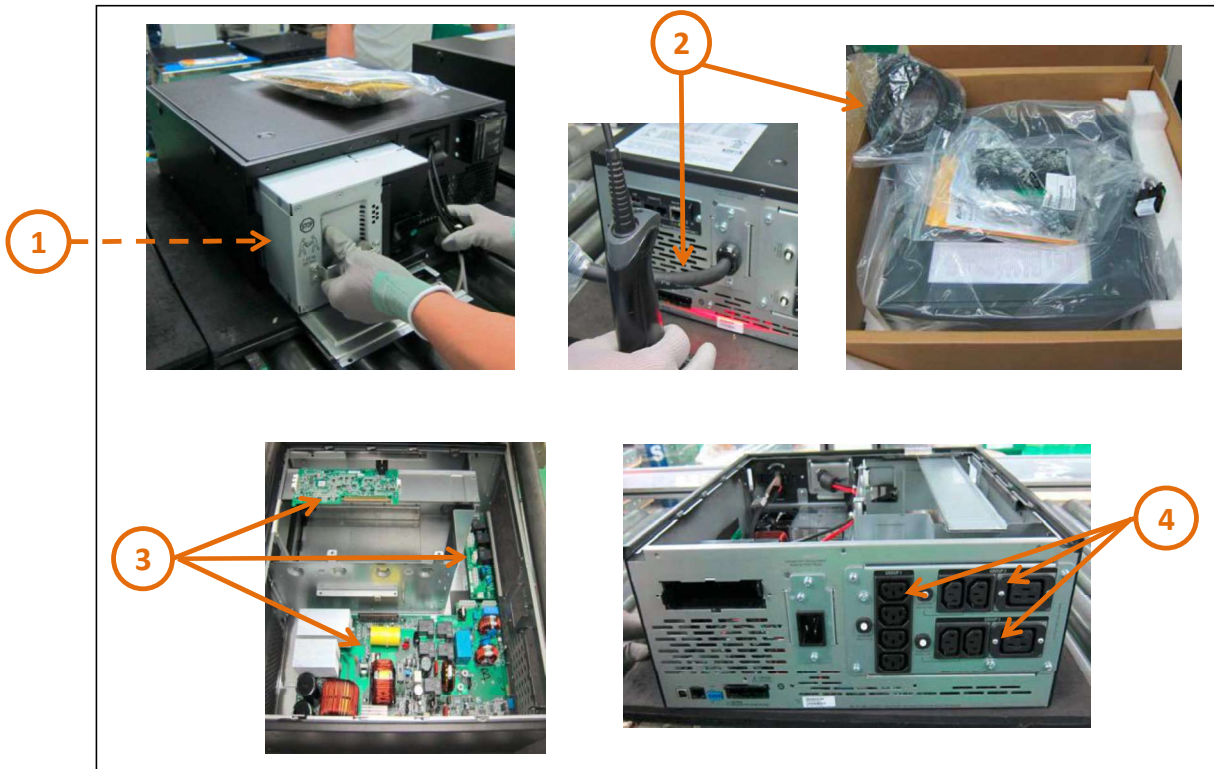

Recommendation	Number on drawing	Component / Material	Weight (g)	Comment
To be depolluted	1	Sealed Lead Acid Batteries	18800	See: RBC, Battery Module, Extended Run Time Battery Module for End of Life Instructions of battery pack. See: Material Safety Data Sheet Available at <a href="http://www.apc.com">www.apc.com</a> Use authorized battery recycler. Caution: Batteries may contain and electrical charge- avoid creating short across terminals. Caution: Cracked or bloated batteries may be hazardous and represent a lead (Pb) exposure.
To be depolluted	2	External Power Cables	1975	Power cables with the unit.
To be depolluted	3	Printed Circuit Boards (PCBA)	4697	Mass is for PCBAs >10cm2 in surface area.
To be dismantled	4	Outlet Assemblies	286	Mass is for ABS-PC parts with brominated flame retardant.



## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	APC
Product function	The Smart-UPS® Uninterruptible Power Supply (UPS) products provide, true double-conversion power protection for servers, voice / data networks, medical labs, and light industrial applications.
Product reference	SMX3000HV
Additional similar product references	Smart-UPS: DLA(XXXX)(Y), DLT(XXXX)(Y), FJX(XXXX)(Y), HTX(XXXX)(Y), NMX(XXXX)(Y), SMT(XXXX)(Y), SMX(XXXX)(Y), SMV(XXXX)(Y), SUA(XXXX)(Y), where XXXX is a number between 2000 and 5000, and Y is blank or any combination of letters and numbers.
Total representative product mass	35907
Representative product dimensions	432mm x 178mm x 483mm
Accessories	None
Date of information release	01/2017



## Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	The battery pack used in this product range contains lead acid batteries that are regulated as Dangerous Goods shipping must be performed in accordance with the appropriate transportation regulations.	
Recyclability potential	<b>58%</b>	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Customer Care Center

[www.schneider-electric.com/contact](http://www.schneider-electric.com/contact)

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

ENVOLI1612029\_V1

© 2016 - Schneider Electric – All rights reserved

01/2017