12 PORT PATCH PANEL – IC110 TYPE, 6P6C USOC

INSTALLATION INSTRUCTIONS

IC110 Punch-Down Tool
Item # IC814110PD
For terminating conductors
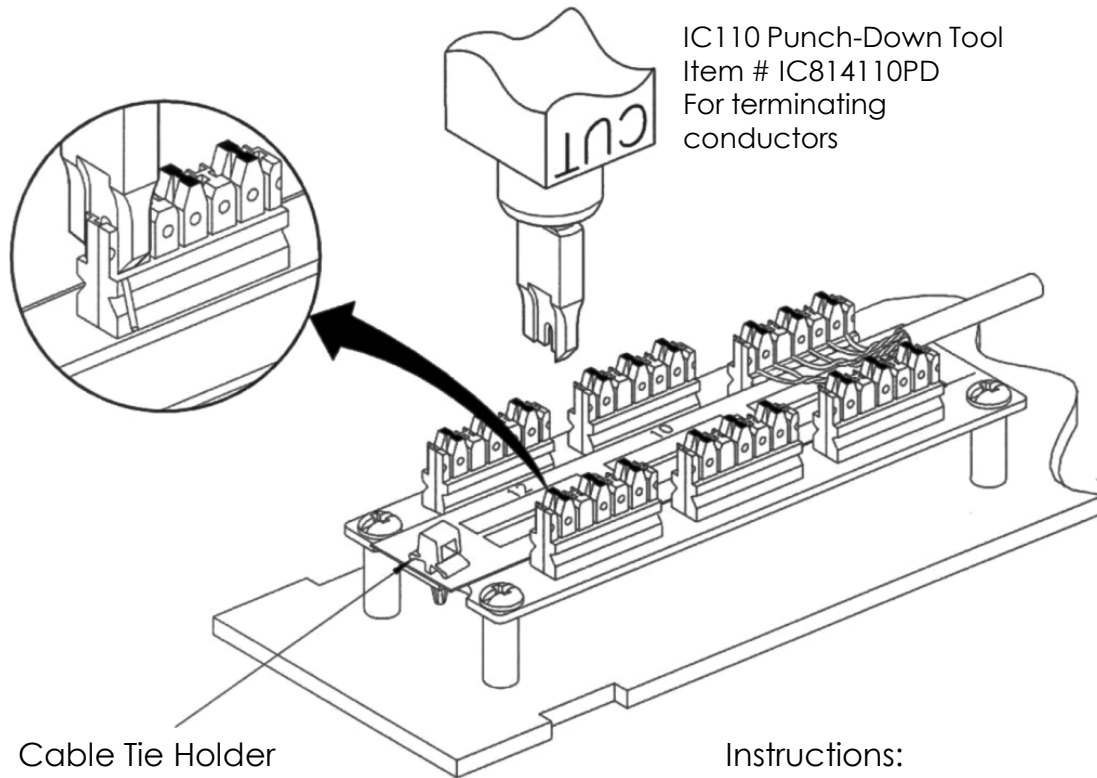
Cable Tie Holder
0.135" x 6" Cable Ties
Included for Cable
Management

Instructions:
1) Place conductors into proper channel according to wiring diagram shown.
2) Set punch-down tool to low impact setting.
3) Align punch-down tool directly over conductor to be terminated
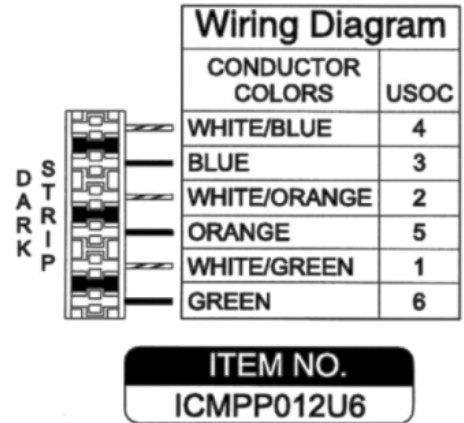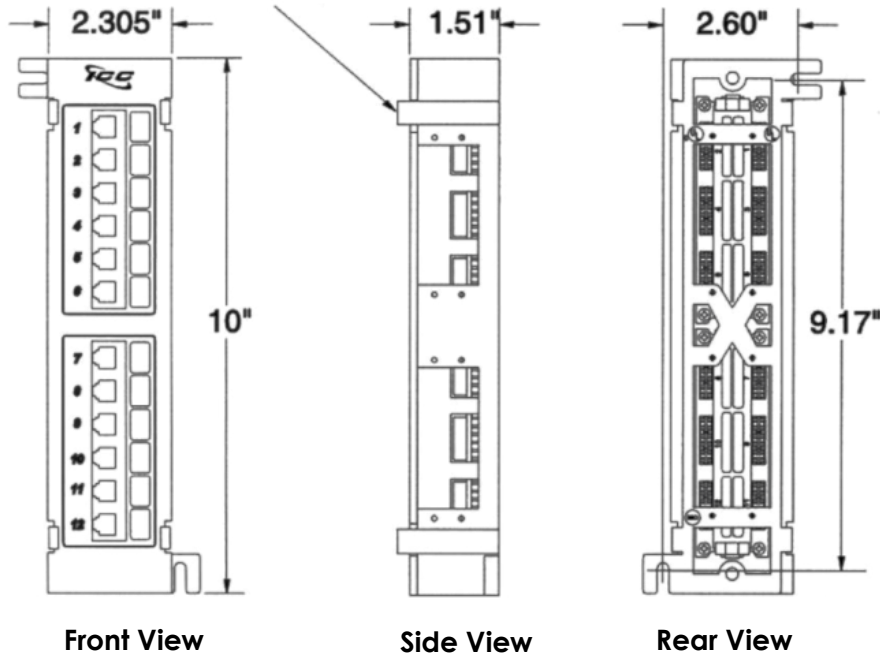4) Push down to terminate and trim conductors

---

FEATURES & BENEFITS

- Wall mounted 6-positon 6-conductor USOC patch panel provides voice connectivity applications
- Engineered to provide 110 IDC termination reducing installation time
- Includes color coded 110 connecting block
- Used with ICACSPDT00 110 punch down tool
- ANSI/TIA-568-C and UL 1863 compliant

888-ASK-4ICC   **csr@icc.com**   **icc.com**

12 PORT PATCH PANEL – IC110 TYPE, 6P6C USOC

Front View — 2.305", 10"

Side View — 1.51"

Rear View — 2.60", 9.17"

Wiring Diagram

CONDUCTOR COLORS	USOC
WHITE/BLUE	4
BLUE	3
WHITE/ORANGE	2
ORANGE	5
WHITE/GREEN	1
GREEN	6

DARK STRIP

ITEM NO.
**ICMPP012U6**

OPTIONAL ACCESSORIES

Punch-Down Tool
ICACSPDT00 Single Blade
• High and low impact setting
• Designed for both 110 and 66 single wire termination
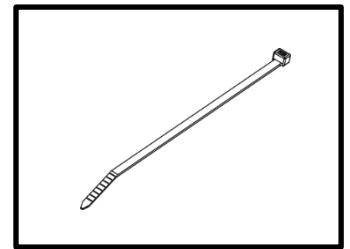• Includes 110 and 66 blade

Wall Mounting Bracket
ICMB89D0WH 89D Wall Mounting Bracket
ICMB89U0WH 89U Universal Wall Mounting Bracket

• Used with 66 blocks or vertical patch panels
• Mounting screws included

Velcro Ties
ICACSVB8BK- 8" 100PK
ICACSVBTBK- 12" 100PK

Cable Ties
ICACSL7Kxx*- 7.5", 50lbs, 1000Pk
ICACSS8Kxx*- 8". 18lbs, 1000Pk
ICACSM8Kxx*- 8.5", 40lbs, 1000Pk
ICACSL1Kxx*- 11", 50lbs, 1000Pk

*xx = **BK-**Black, **NL-**Natural

888-ASK-4ICC   **csr@icc.com**   **icc.com**