

Supports and raises conduit or raceway 4" or more off the roof surface.


**FEATURES AND BENEFITS**

- Allows the contractor to comply with 2017 NEC for temperature adjustment for circular conduit.
- Made of 100% UV resistant recycled material, the heavy-duty base sits on the roof deck without the need for mechanical fasteners.
- Most ship assembled with strut and/or threaded rod installed on base
- Supports up to 2,000 lbs



CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D
RTS4	10492	Open Base 9" W x 5-5/8" H	10	10	9.500	5.625	10.732	6.000
RTS12	10490	Open Base 9" W x 12" H	5	5	9.500	12.250	11.779	8.870
RTS421	10493	Open Base 21" x 5-5/8" H	5	5	9.500	5.625	22.697	6.000
RTS1221	10491	Open Base 21" W x 12" H	5	5	9.500	12.250	11.779	8.870
RTS402*	00916	9"W x 4-7/8"H	10	10	10.000	4.810	10.000	6.090
RTS409L	52311	9"W x 5-5/8"H with Sled	10	10	9.500	5.750	10.932	6.200
RTSB405	00910	Open Base only 5"W x 4"H	10	10	5.281	4.000	6.530	6.000
RTSB409	00911	Open Base only 9"W x 4"H	10	10	9.500	4.000	10.732	6.000
RTSB1209	00912	Open Base only 9"W x 10-3/8"H	5	5	9.000	10.625	11.779	8.870
RTSE405	00913	Open Base w/strut 5"W x 5-5/8"H	10	10	4.750	5.625	6.530	6.000
RTSE405L	52312	5"W x 5-5/8"H with Sled	10	10	4.750	5.625	6.732	6.200
RTSE405SL	52315	5"W x 5-5/8"H with Clamps	10	10	4.750	1.625	6.732	6.200
RTSE409	00914	Open Base w/strut 9"W x 5-5/8"H	10	10	9.000	5.625	10.730	6.000
RTSE409L	52313	9"W x 5-5/8"H with Sled	10	10	9.000	5.625	10.932	6.200
RTSE409SL	52316	9"W x 5-5/8"H with Clamps	10	10	9.000	1.625	10.932	6.200
RTSE1209	00915	Open Base w/strut 9"W x 12"H	5	5	9.000	12.250	11.770	8.870
RTSL405	38010	Sled to Fit Open Bases 4" x 5"	10	10	6.732	6.200	.375	-
RTSL409	38011	Sled to Fit Open Bases 4" x 9"	10	10	10.932	6.200	.375	-

\* Rated for 1,000 lbs.  
**PATENTED.**

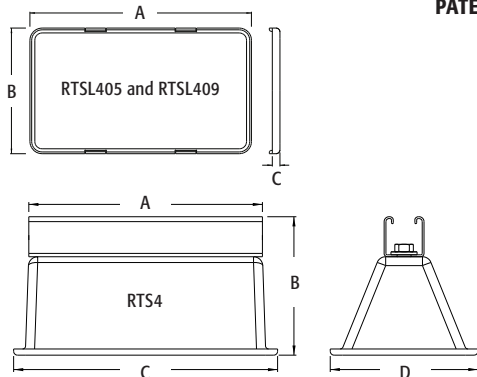

**NEW!**  
SLED  
STYLE



Sled snaps onto open base to allow for expansion and contraction without damaging roof surface

**INSTALLATION SHOTS**



Raceway raised 12" above the roof