


TV Bridge™ II Kits

Non-metallic pre-wired, pre-assembled box kits for flat screen TV installations.

FEATURES AND BENEFITS

- Pre-wired for easy install
- Mounting wing screws hold the boxes secure against the wall
- Plugs and connections stay inside the recessed boxes so TV mounts flush against the wall
- No mess! Wires stay hidden behind the wall

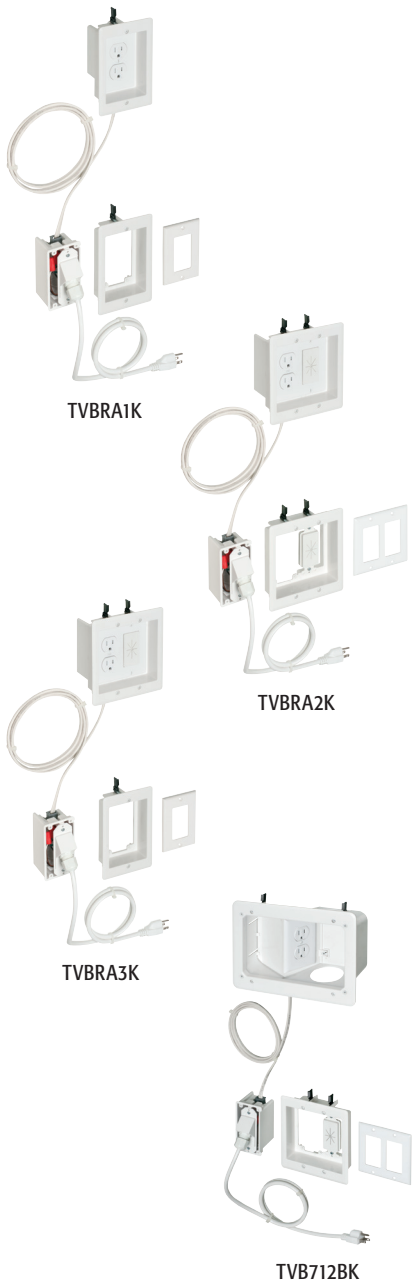

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION	UNIT PKG	STD PKG
TVBRA1K	24180	w/ Single-gang boxes	1	1
TVBRA2K	24181	w/ 2-Gang power/low voltage box	1	1
TVBRA3K	24195	2-Gang power/low voltage upper box, single gang (lower)	1	1
TVB712BK	12781	Single-gang angled power upper box, 2-gang power/low voltage lower box	1	1

Add suffix "GC" to Catalog # when ordering in Canada to include grounding clip, for example TVBRA1KGC.
PATENTED.



CATALOG NUMBER	KIT CONTENTS
TVBRA1K	Single-gang recessed box containing an outlet connected to 7 ft. of NM cable. Second single gang recessed box connected to the NM cable. Includes pre-wired 4 ft. 110V outlet plug, trim, and face plate.
TVBRA2K	2-Gang recessed box containing low-voltage & power outlet connected to 7 ft. of NM cable. Second 2-gang recessed box containing low-voltage & power connected to the NM cable. Includes pre-wired 4 ft. 110V outlet plug, trim plate, and face plate.
TVBRA3K	2-Gang recessed box containing low-voltage & power outlet connected to 7 ft. of NM cable. Second single gang recessed box connected to the NM cable. Includes pre-wired 4 ft. 110V outlet plug, trim, and face plate.
TVB712BK	Single-gang recessed box containing an angled power outlet connected to 7 ft. of NM cable. Second 2-gang recessed box containing low-voltage & power connected to the NM cable. Includes a pre-wired 4 ft. 110V outlet plug, trim plate, and face plate.

Scan For Video



INSTALLATION INSTRUCTIONS



Cut Top hole in wall for the TV.
 Cut Lower hole directly below the top hole, close to existing outlet.
 Drop the pre-wired device box assembly and cable through the top hole. Insert box and tighten wings.



Pull pre-wired device assembly through the bottom hole.



Attach device box to trim plate with screws provided. Secure trim plate to wall with mounting wing screws. Install CED130 in 2-Gang boxes. Pull cables.

