

SpecSeal®

ES


ELASTOMERIC FIRESTOP SEALANT FOR CONSTRUCTION JOINTS

Elastomeric Firestop Sealant

SpecSeal® ES Sealant is a latex-based gun grade elastomeric firestop sealant designed for construction joint applications. Once cured, ES Sealant forms a flexible shield against the passage fire and smoke. In dynamic joint conditions, ES Sealant is tested to accommodate up to 25% compression/extension of the installed joint width

Features & Benefits

- Highly elastomeric gun grade sealant
- Tested for up to 4 Hour fire resistance rating when tested to ASTM E1966/UL 2079.
- Paintable
- Listed in over 45 UL® Certified Construction Joint Systems

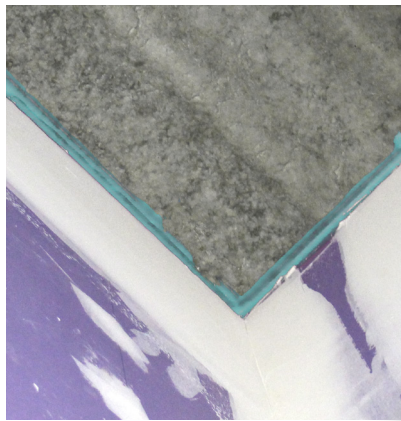

ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
ES100	730573081006	10.1 oz. Tube (300 ml) 18.2 cu.in.	1	12	1.08 lbs (0.49 kg)
ES100R	730573081013	10.1 oz. Tube (300 ml) 18.2 cu.in. - Red	1	12	1.08 lbs (0.49 kg)
ES105	730573081051	5 Gal. Pail (19.0 liters) 1,155 cu.in.	1	N/A	63.30 lbs (28.71 kg)
ES105R	730573081068	5 Gal. Pail (19.0 liters) 1,155 cu.in. - Red	1	N/A	63.30 lbs (28.71 kg)
ES120	730573081037	20 oz. Sausage (592 ml) 36 cu. in.	1	12	1.97 lbs (0.89 kg)
ES120R	730573081044	20 oz. Sausage (592 ml) 36 cu. in. - Red	1	12	1.97 lbs (0.89 kg)
ES129	730573081297	29 oz. Tube (858 ml) 52 cu. in.	1	10	3.05 lbs (1.38 kg)
ES129R	730573081310	29 oz. Tube (858 ml) 52 cu. in. - Red	1	10	3.05 lbs (1.38 kg)

TEST STANDARDS: ASTM E1966 (UL 2079), CAN/ULC-S115, ASTM E90



1-800-992-1180
stifirestop.com



Click here to learn more about



ZSTI3530 19322